

www.rems.de



2024

Catalogue









Product information

Operating instructions

Parts lists

Product films

REMS App – All product information available any time, anywhere – quickly and easily.

On the building site or at your dealer: All operating instructions, parts lists, product information, product films and more can be called upon immediately*. Many other functions are also available to you.



Scan product logo

Are you standing in front of a REMS product? Just scan the product logo and you will get all the product details.



Scan product illustration

You can scan the product illustrations in our offer brochures and get all the details about the product.



Scan QR code

You can scan the REMS QR code and get all the details about the product.





Contents

Sawing 54 Cutting, chamfering, deburring, 72 calibrating **Assembling** 102 Testing, cleaning, disinfecting, 112 preserving, flushing, filling **Bending** 126 **Radial Press Jointing** 144 **Axial Press Jointing** 242 **Expanding, Extracting** 250 **Soldering** 262 **Freezing** 268 Pipe and Drain Inspection / 272 **Pipe and Drain Cleaning Plastic Pipe Welding** 290 **Diamond Core Drilling**

Diamond chasing saws

Drying, dehumidifying,

aeration and deaeration

Threading

Roll Grooving

20

We deliver exclusively on the basis of our general conditions of sale and delivery.

The prices stated in this catalogue are valid for one piece respectively for one set (e.g. dies) or one pack (e.g. saw blades). Prices do not include any value added tax (VAT) and are subject to change without notice. We reserve the right to increase prices. These prices supersede all previous prices.

Drawings, illustrations, dimensions, weights, standards and other data stated in this catalogue are not binding and are subject to alteration. All power data stated to be understood as the rated power input. Subject to alternation. All rights reserved, particularly for translations, reproductions, illustrations, radio transmission, photomechanic reproductions or similar and storage of data in computers, including utilization in extracts.

© Copyright 2024 REMS GmbH & Co KG, Waiblingen.

Sale through specialist dealers.

300

326



REMS – heading technical progress for more than 110 years. Development is never finished.

Since its foundation in 1909 REMS has been developing products for the pipe working, especially for sanitary and heating installers. At first, hand tools and then subsequently machines and electric power tools. The stipulation of the company founder Christian Föll "REMS must be superior" has always been the benchmark for our actions. Today REMS is a leading manufacturer of machines and tools for the pipe working.

REMS development engineers have persuasive, groundbreaking ideas which ease the daily routines of the installations professional. They have all the significant requirements in their focus and use all their comprehensive practical experience. Experts from all areas of industry ensure that every possibility for improvement is integrated in the new development. In this way the perfect tools for the tough demands of the building site are created. The REMS products are highly valued because of their innovative technology as well as their high standards of quality and are being used everywhere in the world. Both trade and user profit in this way.

Again and again REMS is able to maintain its position at the forefront of technical progress as a result of its innovative products. Many valid national and international patents prove this.



Through the application of modern construction and development techniques, the quality of REMS products has been to the fore from the beginning: Safe use, robust design, simple operation, durability.



New ideas, technical progress and REMS belong together: e.g. REMS Amigo, REMS Tiger, REMS Curvo, REMS Akku-Press 22V Connected, REMS Multi-Push – products, which have revolutionised the application technology.



Highly modern production – guarantor for REMS quality products.

Made in Germany. Our own production plant is located in Waiblingen near Stuttgart, in the centre of Germany's high-tech industrial region. There highly modern equipment and facilities are available for research and development, for production and quality control. In addition to this there is a permanent staff of highly-qualified employees, who in part represent the 4th generation of service at REMS. They have the special level of knowledge and experience that is essential for the manufacture of quality products.

Quality means much more to REMS than simply dimensional accuracy and function. It is backed up by a comprehensive quality control system, which begins as early as the assessment of market needs and which is ever present during the product development and manufacture and continues with systematic quality analysis in the market. Furthermore the quality of the production processes is regularly monitored and affirmed by the testing agency that awards the GS safety sign.

All REMS products correspond with safety and accident prevention regulations and fulfil the respective appropriate European standards according to the terms of the EU directives. Additionally, with the exception of a few hand tools which are not safety relevant, all REMS products are checked and approved by independent testing agencies. All REMS products thereby meet an especially high standard with regard to work safety, functional safety and operational safety.



Permanent innovations in processes as well as investments in efficient CNC manufacturing systems engineering ensure that REMS products are amongst the best in the world.



Flexible assembly lines allow adjustment to the requirements of the customer at any time.

REMS is evaluated as having the largest number of training staff in the region. So it is able to maintain its own know-how at a high level.



Tightly defined test intervals during the whole manufacturing process as well as comprehensive function and safety checks after completion of the assembly ensure that no faulty product leaves the plant.



Nobody hardens metal better than us. Therefore, we do it ourselves.

Highly durable, safe in application and extremely resilient – a tool can only meet such demands if the components are perfectly hardened.

An important cornerstone for the quality of REMS tools is laid in our own heat treatment shop. The decades of experience has provided important know-how and is the secret of REMS quality tools. The special heat treatment leads to an ideal combination of solidity and robustness and to an especially long durability, as, for example for threading dies, cutter wheels and pressing tongs. The heat treatment process is automatically monitored and permanently recorded by efficient computer technology. This allows a uniformly high product quality.



Our own heat treatment shop – an important aspect of the know-how and the secret of REMS quality tools.



The proven, indestructible REMS quality threading dies. Of robust, especially hardened special steel.



REMS cutter wheels complement the special demands of the various materials. In particular the special hardening process determines the durability of the REMS cutter wheels.



The art of hardening: It creates extremely resilient components for the highest demands.



REMS – for professionals. Excellent service. On location everywhere.

REMS produces machines and tools for professionals – the demands required are high.

REMS fulfils its tasks with competence, responsibility and a first-rate service. This also includes the swift delivery as well as maintenance and repair work. A high degree of flexibility and absolute reliability are the basis for the excellent service.

The whole logistics organisation is oriented towards the needs of our customers. In order to be able deliver promptly REMS keeps more than 10,000 items ready in the central storage facility. All wear and replacement parts are always available. A service that keeps down-times to a minimum.

In the case of a repair the area-wide network of contracted customer service workshops is available for a rapid and professional repair. Highly-qualified and well-trained staff repair and maintain the machines and tools for our customers. After completion of the repair or Inspection the products are returned again to the customer by the fastest means.



Speed is a question of logistics. REMS keeps wear and replacement parts in stock in a 14,000 m² storage facility.



The demands at the building site are extreme – wear parts are worn, the need for repairs arises. The REMS customer services department is ready and flexible. There is an extensive service organisation in more than 25 countries.



Service is extremely important for REMS: All demonstration vehicles for the more than 200 REMS specialist advisors are fitted with testing equipment with which the function test and force of pressure measurement for REMS radial presses can be carried out on location everywhere.



REMS – business partner to the trade. Excellent advice for contented customers.

Only those who receive competent advice when purchasing find the individually best, economic solution for the tasks ahead. For this reason REMS assigns great significance to the product training of its own REMS specialist advisors and also the staff in the specialist stores.

In the REMS training centre, modern and fully-fitted demonstration, training and conference rooms are available in an area of 1,600 m². The practical-oriented training gives the staff of the specialist stores, in an understandable form, a broad basis and high specialist competence for product advice and successful sale. The detailed sales documentation with information relating to all necessary product specifications facilitate a swift product selection and are the basis for the simple and time-saving generation of offers.

This partnership with the specialist store also guarantees the user qualified, comprehensive product advice and excellent service.



REMS training centre in Waiblingen near Stuttgart.



Modern and fully-fitted demonstration rooms: REMS creates many opportunities for the specialist-store staff to become familiar with the products.



REMS – Market strength through a consistent product and sales philosophy.

REMS' basis for market strength is technically-advanced and high-quality products as well as a product range tightly concentrated on high turnover units and highly competitive prices thanks to the rational, economical in-house production.

At the centre of the sales philosophy the principle has always been that REMS products are sold exclusively via specialist dealers. These are supported by REMS in many ways. REMS specialist advisors equipped with demonstration vehicles carry out product training on location and demonstrate the REMS products at on-site visits, counter demonstrations and at in-house exhibitions. They advise in the selection of the tools and find the most comfortable, reliable and economical solution in each individual situation.



The consistent sales philosophy is designed for long-term results, trust and predictability.



This is how installation professional become familiar with the product range in practice: The REMS specialist advisors are on the road with demonstration vehicles and demonstrate the machines and tools in real situations, directly on the building site.



Touch. Compare. Select. Promoting the mutual sale.

The participation at many national and international trade fairs, the advertising in trade magazines and the direct mail marketing to the user is highly valued by trade outlets as sales-promotion measures.

The attractive REMS product presentation system provides the trade outlet with an optimal presentation of the REMS products: Touch, compare, select. The individual stocking with REMS products is carried out with close cooperation between the REMS specialist advisors and the trade outlet.

The online information system at www.rems.de offers extensive opportunities to find out information about the REMS group, the REMS products and their application possibilities and operation. Furthermore, the user has access to the complete online catalogue and detailed technical documentation, information about current trade fair appearances and addresses of REMS contracted customer service workshops, download opportunities of sales documentation, operating instructions, parts lists, product illustrations and product films, opportunities to order sales documentation in various languages for postal dispatch, e-mail addresses for REMS contacts and much more.



The REMS products are exhibited and demonstrated at many national and international trade fairs.




Practical for the trade, clear for the customers – the REMS product presentation system.



The online information system at www.rems.de





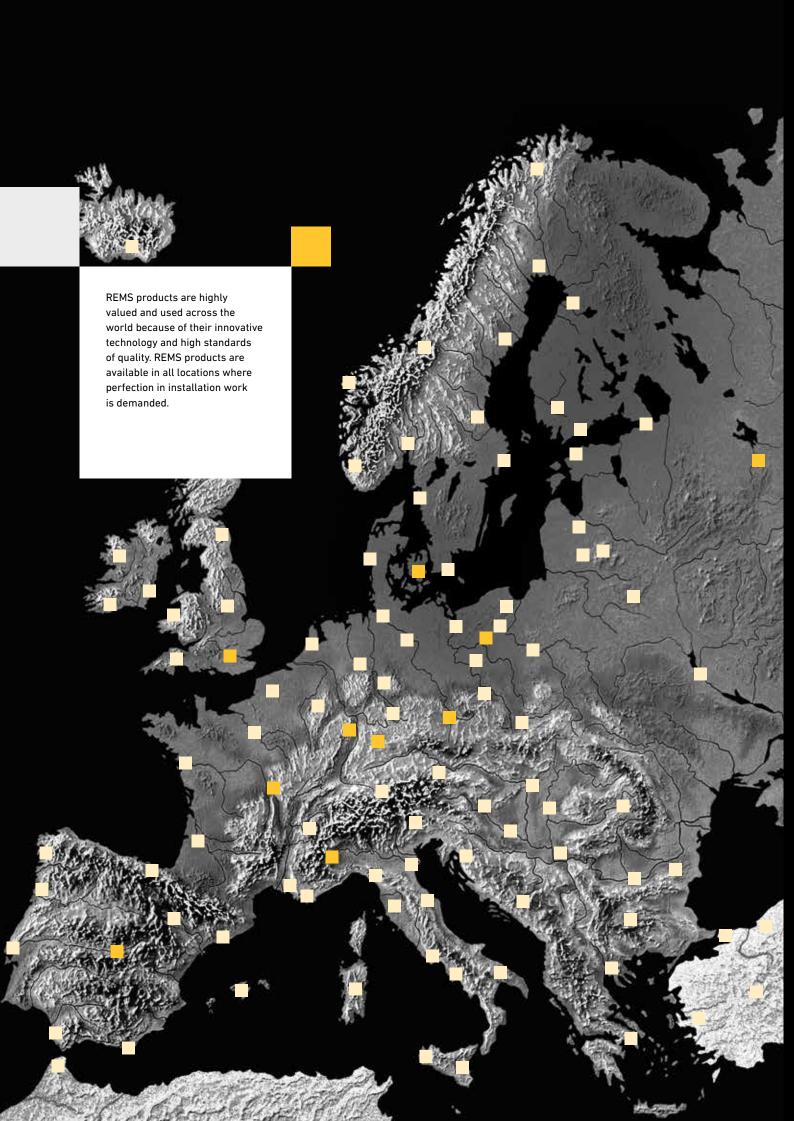

More than 20,000 trade partners in Europe: REMS products are available locally everywhere.

Innovative products and a high standard of quality open new markets for REMS. In the last years the market area has been continuously build-up and extended. Reliable trade partners throughout Europe and beyond guarantee that ever more customers can be persuaded of the quality of REMS.



REMS sets benchmarks for quality throughout Europe – the sales are carried out through the tight network of reliable trade partners in the whole of Europe which are in turn supported by more than 200 well trained REMS specialist advisors.



Sales subsidiaries in many countries deliver optimum conditions for users and trade outlets.



Threading Roll Grooving

6	Hand die stocks	22
R 0 2	Quick-change die heads S	23
- Comment	Electric die stocks	24
	Cordless die stock	28
, I	Threading machines	32
Nos.	Semi-automatic threading machines	42
10	Pipe nipple chucks	46
	Thread-cutting oil	47
	Roll grooving attachments	48
	Roll grooving machine	49
	Cordless roll grooving machine	50
	Roll grooving machines	52

REMS eva

Proven quality die stock with excellent threading capabilities.

Pipe threads $\frac{1}{8}$ - 2", 16 - 50 mm Bolt threads 6 - 30 mm, $\frac{1}{4}$ - 1"

Thread types see page 30, 31.

REMS eva – the plumber's die stock. Excellent start-cutting and threading. Steel ratchet lever, thickly plastic coated. Only one type of quick-change die heads. Indestructible quality dies.

System advantage

Large working range up to 1%" and up to 2" with only **one** ratchet lever. Only **one** type of small, compact quick-change die heads and only **one** type of dies. The same quick-change die heads fit all REMS die stocks and other suitable makes of die stocks. Efficient and easy stocking. No confusion possible.

Ratchet lever

Robust. Ratchet lever in steel, thickly plastic coated, for convenient operation. Serrated plastic handle for secure grip. Easy adjustment of ratchet rotation. Perfect, secure seating of quick-change die heads, fast and easy change.

Quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads. Quick-change die heads S for cutting pipe threads in hard-to-reach areas (page 23).

Dies

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with REMS Nippelspanner 3/8 - 2" (page 46).



German Quality Product



Supply format

REMS eva Set. Hand die stock with quick-change die heads. For pipe threads $\frac{1}{16}$ – 2", $\frac{16}{16}$ – 50 mm, bolt threads 6 – 30 mm, $\frac{1}{16}$ – 1". For right and left-hand threads. 1 ratchet lever for the complete work range. Quick-change die heads with dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M.

in sturdy steet case or in a cardboard box.		
Description/Size	ArtNo.	€
REMS eva Set in steel case		
R ½ + ¾ + 1	520014	415,20
R ½ + ¾ + 1 + 1¼	520015	493,05
R 3/8 + 1/2 + 3/4 + 1 + 11/4	520013	560,52
R ½ + ¾ + 1 + 1¼ + 1½ + 2	520017	685,08
R 3/8 + 1/2 + 3/4 + 1 + 11/4 + 11/2 + 2	520016	757,74
M 16 + 20 + 25 + 32 (M × 1,5)	520010	581,28
M 20 + 25 + 32 + 40 (M × 1,5)	520009	622,80
REMS eva Set in cardboard box		
R ½ + ¾	520008	259,50
R ½ + ¾ + 1	520004	332,16
R 3/8 + 1/2 + 3/4 + 1 + 11/4	520003	477,48

REMS eva sets available for left-handed threads and NPT threads.





Accessories

Description	ArtNo.	€
Ratchet lever for complete work range	522000	168,16
Quick-change die heads S see page 23.		
Quick-change die heads, dies, attachment heads for button dies, see page 30-31.		
Steel case with inlay, for REMS eva 3/8 - 2"	526050	110,03
Thread-cutting oil see page 47.		
REMS Nippelspanner 3/4 - 2" see page 46.		
REMS Aquila 3B, pipe workstation with chain pipe vice on folding tripod stand, see page 105.		
REMS Aquila WB, chain pipe vice for workbench, see pag	je 105.	



For cutting pipe threads in hard-to-reach areas, e.g. caved wall, lay bare pipes, trench. Ideal for repair and renovation.

Pipe threads

3/8 - 11/4"

REMS quick-change die heads S – the trouble shooter for hard-to-reach areas.

Quick-change die heads S with specially mounted dies.

 $\label{lem:cover_side} \mbox{Additional, precise pipe guidance at the cover side ensure perfect pipe centering and easy start-cutting.}$

Extension of ratchet drive REMS eva for threading in caved areas.

Quick-change die heads S and extension fit into the ratchet lever REMS eva and other suitable die stocks.



German Quality Product





Supply format

Die heads S Set. choice of quick-change die heads S for pipe threads tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT) respectively Taper Pipe Thread ASME B1.20.1, Extension 300 mm. In sturdy steel case.

Description	ArtNo.	€
Set R 3/8 + 1/2 + 3/4	520025 R	560,52
Set R ½ + ¾ +1	520026 R	570,90
Set NPT ½ + ¾ + 1	520056R	570.90



Accessories

Description	Size	ArtNo.	€
Ratchet lever for complete work range	-	522000	168,16
Quick-change die heads S			
Pipe threads tapered, right ISO 7-1,	R 3/8	521026	155,70
EN 10226 (DIN 2999, BSPT)	R 1/2	521036	161,93
	R 3/4	521046	169,19
	R 1	521056	175,42
	R 11/4	521066	182,69
Extension 300 mm		522051	168,16
Steel case with inlay for ratchet lever, 4 guick-change die heads S and extens	ion.	526052R	110.03



All prices excl. VAT 23

REMS Amigo E

Powerful, super handy electric tools for threading with unique support bracket. Ready to use anywhere, without vice. Ideal for repair, renovation, job site.

 $\frac{1}{8}$ – 1", 16 – 32 mm Pipe threads 6-30 mm, 1/4-1" **Bolt threads**

Thread types see page 30, 31.

REMS Amigo E - the fastest, strongest and lightest up to 1".

System advantageOnly **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion

Support bracket

Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design

Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 3.4 kg, without die head. No heavy top, therefore single-hand operation possible. Perfect, secure seating of quick-change die heads.

Solid, compact, maintenance-free gear. Robust, powerful 950 W universal motor with 30 $\!\%$ power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Peak power input up to 1500 W. Fast threading time 35 – 27 rpm. Safety tip switch.

Quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with REMS Nippelspanner 3/8 - 1" (2") (page 46).



German Quality Product




Supply format

REMS Amigo E Set. Electric die stock with quick-change die heads. For pipe threads $\frac{1}{1}$, $\frac{1}{6}$ - $\frac{32}{1}$ mm, bolt threads $\frac{6}{1}$ - $\frac{30}{1}$ mm, $\frac{1}{4}$ - $\frac{1}{1}$. For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50-60 Hz, 950 W, safety tip switch, power increase thanks to automatic carbon brush adjustment. Peak power input up to 1500 W. Right and left-hand rotation. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M. In sturdy steel case.

Description	ArtNo.	€
Set R ½ + ¾ + 1	530013R220	913,44
Set M 20 + 25 + 32	530014R220	975,72

REMS Amigo E Set for NPT threads available.



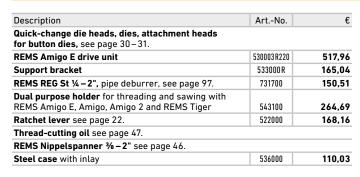





REMS Amigo

Powerful, easy-to-operate electric tool for threading with unique support bracket. Ready for use anywhere, without vice. Ideal for repair, renovation, job site.

Pipe threads $\frac{1}{8} - \frac{1}{4}$ ", 16 - 40 mm Bolt threads 6 - 30 mm, $\frac{1}{4} - 1$ "

Thread types see page 30, 31.

REMS Amigo – the smallest, lightest, strongest and fastest up to 11/4".

System advantage

Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion possible.

Support bracket

Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design

Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 3.5 kg, without die head. No heavy top, therefore single-hand operation possible. Perfect, secure seating of quick-change die heads.

Drive

Solid, compact, maintenance-free gear. Robust, powerful 1200 W universal motor with 30 % power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Peak power input up to 1800 W. Fast threading time $35-27\ \text{rpm}.$ Safety tip switch.

Quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Dies

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with REMS Nippelspanner % – 1¼" (2") (page 46).



German Quality Product



Supply format

REMS Amigo Set. Electric die stock with quick-change die heads. For pipe threads $\frac{1}{2}$ 16–40 mm, bolt threads 6–30 mm, $\frac{1}{2}$ -1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50–60 Hz, 1200 W, safety tip switch, power increase thanks to automatic carbon brush adjustment. Peak power input up to 1800 W. Right and left-hand rotation, overload protection switch. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M. In sturdy steel case.

Description	ArtNo.	€	
Set R ½ + ¾ +1+1¼	530020R220	1.100,28	
Set M 16 + 20 + 25 + 32 (M × 1,5)	530022 R220	1.162,56	
Set M 20 + 25 + 32 + 40 (M × 1 5)	530023 R220	1 245 40	

REMS Amigo Set for NPT threads available.



Accessories

Description	ArtNo.	€
Quick-change die heads, dies, attachment heads for button dies, see page 30 – 31.		
REMS Amigo drive unit	530000R220	621,76
Support bracket	533000R	165,04
REMS REG St ¼ – 2", pipe deburrer, see page 97.	731700	150,51
Dual purpose holder for threading and sawing with REMS Amigo E, Amigo, Amigo 2 and REMS Tiger	543100	264,69
Ratchet lever see page 22.	522000	168,16
Thread-cutting oil see page 47.		
REMS Nippelspanner 3/6 - 2" see page 46.		
Steel case with inlay	536000	110,03



All prices excl. VAT

REMS Amigo 2

Powerful, easy-to-operate electric tool for threading with unique support bracket. Ready for use any-where, without vice. Ideal for repair, renovation, job site.

 $\frac{1}{8}$ - 2", 16 - 50 mm Pipe threads **Bolt threads** 6-30 mm, $\frac{1}{4}-1$ "

Thread types see page 30, 31.

REMS Amigo 2 – extremely strong up to 2".

System advantage

Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion

Support bracket

Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design

Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 6.5 kg, without die head. Perfect seating of quick-change die heads.

Drive

Solid, maintenance-free gear. Robust 1700 W universal motor with 30 $\!\%$ power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Fast threading time 30-18 rpm. Safety tip switch.

Quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip

The proven, industructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with REMS Nippelspanner 3/4 - 1" (2") (page 46).



German Quality Product





Supply format


REMS Amigo 2 Set. Electric die stock with quick-change die heads. For pipe threads % – 2", 16 – 50 mm, bolt threads 6 – 30 mm, % – 1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50-60 Hz, 1700 W, safety tip switch, power increase thanks to automatic carbon brush adjustment, right and left-hand rotation. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to EN 60423 M. In sturdy steel case.

Description	ArtNo.	€
Set R ½ + ¾ +1+1¼ +1½ +2	540020R220	1.743,84
Set M 20 + 25 + 32 + 40 + 50 (M x 1 5)	540022R220	1 889 16

REMS Amigo 2 Set for NPT threads available.

Other voltages on request.



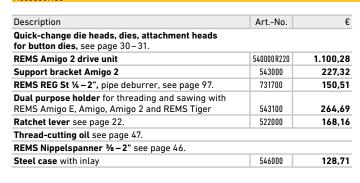





REMS Amigo 2 Compact

Powerful, easy-to-operate electric tool for threading with unique support bracket. Ready for use any-where, without vice. Ideal for repair, renovation, job site.

Pipe threads $\frac{1}{8}$ – 2", 16 – 50 mm Bolt threads 6 – 30 mm, $\frac{1}{4}$ – 1"

Thread types see page 30, 31.

REMS Amigo 2 Compact – The smallest and lightest up to 2".

System advantage

Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion possible.

Support bracket

Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design

Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Drive unit only 4.9 kg, without die head. Perfect seating of quick-change die heads.

Drive

Solid, maintenance-free gear. Robust 1200 W universal motor with 30 % power increase thanks to automatic carbon brush adjustment while changing the direction of rotation. Peak power input up to 1800 W. Fast threading time 30-18 rpm. Safety tip switch.

Quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Dies

The proven, industructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with REMS Nippelspanner 3/8 - 1" (2") (page 46).



German Quality Product





Supply format

REMS Amigo 2 Compact Set. Electric die stock with quick-change die heads. For pipe threads $\frac{1}{6} - 2^{\circ}$, $\frac{1}{6} - 50$ mm, bolt threads 6 - 30 mm, $\frac{1}{6} - 1^{\circ}$. For right and left-hand threads. Drive unit with maintenance-free gear, powerful universal motor 230 V or 110 V, 50 - 60 Hz, 1200 W, safety tip switch, power increase thanks to automatic carbon brush adjustment. Peak power input up to 1800 W. Right and left-hand rotation. Overload protection. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to DIN DN 60423 M. In sturdy steel case.

Description	ArtNo.	€
Set R ½ + ¾ +1+1¼	540023R220	1.598,52
Set R ½ + ¾ +1+1¼ +1½ +2	540024R220	1.743,84
Set M 20 + 25 + 32 + 40 + 50 (M × 1,5)	540025R220	1.889,16

REMS Amigo 2 Compact Set for NPT threads available. Other voltages on request.



Accessories

Description	ArtNo.	€
Quick-change die heads, dies, attachment heads for button dies, see page 30-31.		
REMS Amigo 2 Compact drive unit	540001 R220	1.100,28
Support bracket Amigo 2 Compact	543010	227,32
REMS REG St ¼ - 2", pipe deburrer, see page 97.	731700	150,51
Ratchet lever see page 22.	522000	168,16
Thread-cutting oil see page 47.		
REMS Nippelspanner 3/8 - 2" see page 46.		
Steel case with inlay	546000	128.71



All prices excl. VAT 27

REMS Amigo 22 V

Powerful, mobile, handy electric tool for threading with unique support bracket. Ready for use any-where, without vice. Ideal for repair, renovation, job site. Li-lon 22V Technology. For battery and corded operation.

Pipe threads $\frac{1}{8} - 1$ ", 16 - 32 mm Bolt threads 6 - 30 mm, $\frac{1}{4} - 1$ "

Thread types see page 30, 31.

REMS Amigo 22 V - mobile, handy, light. Li-Ion 21.6 V, 9.0 Ah battery, for approx. 52 ¾" threads with one battery charge*.

System advantage

Only **one** type of small, compact quick-change die heads and only **one** type of dies for all REMS die stocks. Thus efficient and easy stocking. No confusion possible.

Support bracket

Solid, easy to use, supports the die stock against torque in both directions. Secure clamping through angular clamping spindle with self-supporting effect. Very simple mounting of die stock onto support bracket and pipe.

Design

Compact, robust, job site-proven. Can be used anywhere, even without vice. Slender design for working in confined areas. Mobile, handy, light. Drive unit with battery pack weighs only 5.6 kg. Practical D-shaped handle with soft grip. Perfect seating of quick-change die heads. Machine status check with overload protection of the drive unit against too high currents, with overheating protection by motor temperature monitoring (NTC), with electronic battery charging status check by a 2-coloured green/red LED.

Drive

Solid, maintenance-free gear. Powerful battery motor 21.6 V, with large power reserve, $500\,W$ output. High cutting speed $27-20\,\mathrm{rpm}$. Safety tip switch.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V batteries with 9.0 Ah capacity for long service life. Light and powerful, for 52 3 4" threads with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range -10 to +60 °C. No memory effect for maximum battery power. Rapid charger $100-240\,\text{V},\,90\,\text{W}$. Rapid charger $100-240\,\text{V},\,290\,\text{W}$, for shorter charging times, as accessory. Voltage supply $220-240\,\text{V}/21.6\,\text{V},\,40\,\text{A}$ output, for mains operation instead of Li-lon battery 21.6 V, as accessory.

Quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Dies

The proven, industructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with REMS Nippelspanner 3/6 - 1" (2") (page 46).



German Quality Product





Supply format

REMS Amigo 22V Set. Cordless die stock with quick-change die heads. For pipe threads %–1", 16–32 mm, bolt threads 6–30 mm, %–1". For right and left-hand threads. Drive unit with maintenance-free gear, powerful battery motor 21.6 V, 500 W. Safety switch. Right and left-hand rotation, machine status check with overload protection, temperature monitoring, battery charging status check. Li-lon 21.6 V, 9.0 Ah battery, 100–240 V, 50–60 Hz, 90 W rapid charger. Support bracket for both directions. REMS eva quick-change die heads for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand respectively for threading electric conduit according to DIN DN 60423 M. In sturdy steel case.

Description	ArtNo.	€
Set R ½ + ¾ +1	530015 R220	1.920,30
Set M 20 + 25 + 32	530016 R220	1.992,96

REMS Amigo 22 V Set for NPT threads available. Other voltages on request.



Accessories

Description	ArtNo.	€
Quick-change die heads, dies, attachment heads for button dies, see page 30-31.		
REMS Akku-Amigo 22V drive unit,		
without battery	530004R22	1.162,56
Support bracket Amigo 2 Compact	543010	227,32
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100-240 V, 50-60 Hz, 90 W	571585 R220	175,42
Rapid charger 100-240 V, 50-60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 40 A,		
for mains operation instead of battery Li-Ion 21.6V	571578R220	517,96
REMS REG St ¼ - 2", pipe deburrer, see page 97.	731700	150,51
Ratchet lever see page 22.	522000	168,16
Thread-cutting oil see page 47.		
REMS Nippelspanner 3/8 − 2" see page 46.		
Steel case with inlay	566030R	128,71
REMS Lumen 2800 22V, cordless LED flood light, see	page 111	



REMS quick-change die heads

REMS quick-change die heads

Proven technology, high-grade material and precise machining of die head, dies and cover form a unit and ensure an excellent start-cutting performance and easy threading. No stalling of dies. Long, precise pipe guidance for perfect pipe centering. The chip holes which become wider at the outside enable good chip flow and clean threads.

Thread type	Size	ArtNo.	€
Pipe threads R tapered, right-hand	R 1/8	521000	202,41
ISO 7-1, EN 10226	R 1/4	521010	176,46
(DIN 2999, BSPT)	R 3/8	521020	119,37
	R 1/2	521030	124,56
	R 3/4	521040	129,75
	R 1	521050	134,94
	R 11/4	521060	140,13
	R 1½	521070	166,08
	R 2	521080	176,46
Pipe threads R tapered, left-hand	R⅓ LH	521100	242,89
ISO 7-1, EN 10226	R¼ LH	521110	211,75
(DIN 2999, BSPT)	R 3/8 LH	521120	143,24
	R ½ LH	521130	149,47
	R ¾ LH	521140	155,70
	R1 LH	521150	161,93
	R 11/4 LH	521160	168,16
	R 1½ LH	521170	199,30
	R 2 LH	521180	211,75
Pipe threads NPT tapered, right-hand	NPT 1/8	521200	202,41
Taper Pipe Thread ASME B1.20.1	NPT 1/4	521210	176,46
	NPT 3/8	521220	119,37
	NPT ½	521230	124,56
	NPT ¾	521240	129,75
	NPT 1	521250	134,94
	NPT 11/4	521260	140,13
	NPT 11/2	521270	166,08
	NPT 2	521280	176,46
Threads M for electric conduit	M 16 × 1.5	521300	155,70
EN 60423	M 20 × 1.5	521310	155,70
	M 25 × 1.5	521320	161,93
	M 32 × 1.5	521330	168,16
	M 40 × 1.5	521340	199,30
	M 50 × 1.5	521350	211,75





German Quality Product

REMS dies

Accessories for REMS die stocks

REMS dies

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Thread type	Size	ArtNo.	€
Pipe threads R tapered, right-hand ISO 7-1, EN 10226	R 1/8 R 1/4	521002RWS 521012RWS	92,38 87,19
(DIN 2999, BSPT)	R 3/8 R 1/2	521022 RWS 521032 RWS	87,19 87,19
	R 3/4	521042RWS	95,50
	R 1 R 1¼	521052 RWS 521062 RWS	95,50 95,50
	R 1½	521072RWS	95,50
	R 2	521082 RWS	95,50
Pipe threads R tapered, left-hand ISO 7-1, EN 10226	R 1/8 LH R 1/4 LH	521102RWS 521112RWS	111,07 104,84
(DIN 2999, BSPT)	R 3/8 LH	521122RWS	104,84
	R½ LH	521132RWS	104,84
	R¾ LH R1 LH	521142 RWS 521152 RWS	115,22 115,22
	R 11/4 LH	521162RWS	115,22
	R 1½ LH	521172RWS	115,22
Pipe threads NPT tapered, right-hand	R 2 LH NPT 1/8	521182RWS 521202RWS	114,18 92,38
Taper Pipe Thread ASME B1.20.1	NPT ¼	521212RWS	87,19
	NPT 3/8	521222 RWS	87,19
	NPT ½ NPT ¾	521232 RWS 521242 RWS	87,19 95.50
	NPT 1	521252RWS	95,50
	NPT 11/4	521262 RWS	95,50
	NPT 1½ NPT 2	521272 RWS 521282 RWS	95,50 95,50
Threads M for electric conduit	M 16 × 1.5	521202 RWS	115.22
EN 60423	M 20 × 1.5	521312RWS	115,22
	M 25 × 1.5	521322 RWS	115,22
	M 32 × 1.5 M 40 × 1.5	521332 RWS 521342 RWS	115,22 115,22
	M 50 × 1.5	521352RWS	114,60



German Quality Product





Attachment heads

Attachment heads for incorporating standard, round button dies of all thread types. Locking of button dies to the attachment head with stud bolt.

3			
Description	Size	ArtNo.	€
Attachment head for button dies	Ø 65 mm	731200	152,59
Attachment head for button dies	G 11/4	731250	158,81
Attachment head for button dies	Ø 105 mm	541401	196,18

Intermediate rings

Intermediate rings for different outside diameters of button dies.

Description	Size	I.D. mm	ArtNo.	€
Intermediate rings	M 6-9	20/25	731205	85,12
to attachment head	M 10 – 11	30	731210	85,12
731200	M 12 – 14 (Pg 7 – 9)	38	731220	85,12
	M 16 – 20 (Pg 11 – 13,5)	45	731230	85,12
	M 22-24 (Pg 16)	55	731240	85,12
without				
intermediate ring	M 27-30 (Pg 21-29)	65		
Intermediate rings	Ø 65/105 (Pg 21-29)	65	541404	96,53
to attachment head	Ø 75/105	75	541406	96,53
541401	Ø 90/105 (Pg 36)	90	541410	96,53
without				
intermediate ring	Pg 42-48	105		

Guide bushings

Guide bushings for easy and concentric start-cutting.

Description	Size	ArtNo.	€
Guide bushings	Ø 6	731301	26,99
to attachment head	Ø 8	731302	26,99
731200	Ø 10	731303	26,99
	Ø 12	731304	26,99
	Ø 14	731305	26,99
	Ø 16	731306	26,99
	Ø 18	731307	26,99
	Ø 20	731308	26,99
	Ø 22	731309	26,99
	Ø 24	731310	26,99
	Ø 27	731311	26,99
	Ø 30	731312	26,99
	Ø 12.8 (Pg 7)	731320	26,99
	Ø 15.5 (Pg 9)	731321	26,99
	Ø 18.9 (Pg 11)	731322	26,99
	Ø 20.7 (Pg 13.5)	731323	26,99
	Ø 22.8 (Pg 16)	731324	26,99
	Ø 28.6 (Pg 21)	731325	26,99
	Ø 37.3 (Pg 29)	731326	26,99
Guide bushings	Ø 28.6 (Pg 21)	541413	31,14
to attachment head	Ø 37.3 (Pg 29)	541414	31,14
541401	Ø 47.3 (Pg 36)	541415	31,14
	Ø 54.3 (Pg 42)	541416	31,14







German Quality Product

All prices excl. VAT 31 Proven high performance machine for threading, cutting, deburring, threading of nipples, roll grooving.

For installation, metalworking, industry.

For job site and workshop.

 $(\frac{1}{16})$ $\frac{1}{8}$ – 2", 16 – 63 mm Pipe threads **Bolt threads** (6) 10-60 mm, $\frac{1}{4}-2$ "

Thread types see page 40.

Pipe grooving with

REMS roll grooving attachment

DN 25-200

1-8"

REMS Tornado - a class of its own. Automatic chuck. Universal automatic die head. Automatic lubrication and cooling.

Operating principle

Rotating material - stationary tools.

Design

Robust, job site-proven. Favourable size and weight, e.g. REMS Tornado 2000 complete only 50 kg. Large work and chip compartment. Easy handling of chip tray. Adjustable height material support.

2 versions:

- Portable version with 3 tubular legs, with removable large oil basin and chip tray.
- Version T with integrated, even larger oil basin and chip tray. For workbench. Stand, collapsible wheel stand or wheel stand with material shelf, as an accessory, for easy transport, optimum working height and stable positioning.

Drive

Extremely powerful and fast, e.g. R 2" thread in only 15 s. Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:

- Strong universal motor, 1700 W. verload protection. Spindle speed 53 rpm.
- Pole-reversible capacitor motor, 2100 W. Overload protection. 2 spindle speeds 52 and 26 rpm, also under full load. Extremely quiet running.
- Pole-reversible 3~induction motor, 2000 W. Overload protection, 2 spindle speeds 52 and 26 rpm, also under full load. Extremely quiet running.

Operator-friendly safety foot switch with emergency-stop, 2-step. Foot switch, can be loaded with the full body weight during operation.

Automatic chuck

2 automatic chucks with self-centering clamping jaws for easy and fast clamping and release of the material. Self-tightening, hence maximum clamping force No slipping of pipes. Collets are available for clamping pipes < 0 % and bolts < Ø 10 mm.

Automatic lubrication and cooling

Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head

Only one universal automatic die head for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. Fast and easy adjustment of thread size. Easy-to-read thread-size scale. Simple and fast change of dies through lock-in positioning in die holder.

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter

Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer

Robust, easy-to-handle deburring device with adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.

Thread-cutting oil REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with the automatic internal clamping REMS Nippelfix 1/2 - 2" (4") or with the manual internal clamping REMS Nippelspanner $\frac{1}{36}$ – 2" (page 46).



German Quality Product











Choice of 3 powerful motors.




REMS roll grooving attachment

Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25-300, 1-12" (page 48). Roll grooving with REMS Tornado up to DN 200, 8".



Wheel stand (accessory)

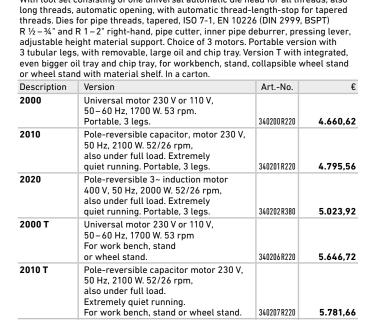

REMS Tornado. Threading machine for pipe threads (1/16) 1/16 – 1/16 – 1/16 mm, bolt threads (6) 10 – 60 mm, 1/16 – 1/16 with maintenance-free gear, safety foot switch

with emergency-stop, 2 automatic chucks, automatic lubrication and cooling. With tool set consisting of one universal automatic die head for all threads, also

Other voltages and NPT versions on request.

also under full load. Extremely quiet running.

Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm,

For work bench, stand or wheel stand.

340208R380

6.010,02



Accessories

2020 T

Supply format

Description	ArtNo.	€
Stand	344105R	290,64
Wheel stand with material shelf	344100 R	493,05
Collapsible wheel stand	344150R	705,84
Dies see page 40.		
Universal automatic die head 1/16-2" quick-change die head instead of changing the dies	341000 RR	778,50
REMS cutter wheel St 1/8 - 4", s 8	341614R	15,47
Thread-cutting oil see page 47.		
Nipple holder see page 46.		
REMS Herkules material supports, see page 10	7.	
REMS roll grooving attachment		
for pipe grooving, see page 48.	347000R	2.242.08



All prices excl. VAT 33

Robust, compact high performance machine for threading, cutting, deburring, threading of nipples, roll grooving. For installation, metalworking, industry. For job site and workshop.

Pipe threads (1/16) 1/8 - 2", 16 - 63 mm Bolt threads (6) 8 - 60 mm, 1/4 - 2"

Thread types see page 40.

Grooving of pipes with

REMS roll grooving attachment

DN 25-300 1-12"

REMS Magnum - the compact up to 2".

Operating principle

Rotating material - stationary tools.

Design

Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 2000 L-T only 62 kg. Large work and chip compartment. Tool support. 2 versions:

- Light version L-T with removable large oil basin and chip tray.
- Version T with integrated, even larger oil basin and chip tray

For workbench. Stand, collapsible wheel stand or wheel stand with material shelf, as an accessory, for easy transport, optimum working height and stable positioning.

Drive

Extremely powerful and fast, e.g. thread R 2° in only 15 s. Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:

- Strong universal motor, 1700 W.
- Overload protection. Spindle speed 53 rpm.
- Pole-reversible capacitor motor, 2100 W.
 Overload protection. 2 spindle speeds 52 and 26 rpm, also under full load. Extremely quiet running.
- Pole-reversible 3~ induction motor, 2000 W.
 Overload protection. 2 spindle speeds 52 and 26 rpm, also under full load. Extremely quiet running.

Operator-friendly safety foot switch with emergency-stop, 2-step. Foot switch, can be loaded with the full body weight during operation.

Chuck

Proven quick-action hammer chuck, self-tightening. No slipping of pipes. Large space between chuck and centering device ensures secure clamping of long pipes. Rear centering device for alignment of the material. Collets are available for clamping pipes < 0 % and bolts < 0 8 mm.

Automatic lubrication and cooling

Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head

Only **one** universal automatic die head for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. Fast and easy adjustment of thread size. Simple and fast change of dies through lock-in positioning in die holder.

Dies

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter

Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer

Robust, easy-to-handle deburring device for adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.

Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with automatic internal clamping REMS Nippelfix $\frac{1}{2}$ – 2" (4") or with manual internal clamping REMS Nippelspanner $\frac{3}{2}$ – 2" (page 46).

REMS roll grooving attachment


Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25–300, 1–12" (page 48).



German Quality Product













Supply format

REMS Magnum. Threading machine for pipe threads $(V_{16}) \% - 2$ ", 16-63 mm, bolt thread (6) 8-60 mm, % - 2". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling. With complete tool set consisting of one universal automatic die head for all threads, also long threads; automatic opening, with automatic thread-length-stop for tapered threads, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R $\frac{1}{2} - \frac{3}{4}$ " and R 1 – 2" right-hand, pipe cutter, inner pipe deburrer, pressing lever. Tool support. Choice of 3 motors. Version L-T with removable large oil basin and chip tray. Version T with integrated, even bigger oil tray and chip tray. For workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.

Description	Version	ArtNo.	€
2000 L-T	Universal motor 230 V or 110 V, 50 – 60 Hz, 1700 W. 53 rpm.	340226 R220	4.712,52
2010 L-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running.	340227 R220	5.117,34
2020 L-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running.	340228 R380	5.273,04
2000 T*	Universal motor 230 V or 110 V, 50 – 60 Hz, 1700 W. 53 rpm.	340220R220	5.646,72
2010 T*	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running.	340221R220	6.051,54
2020 T*	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running.	340222R380	6.207,24

Other voltages and NPT versions on request.

Accessories

Description	ArtNo.	€
Stand	344105R	290,64
Wheel stand with material shelf	344100R	493,05
Collapsible wheel stand	344150R	705,84
Dies see page 40.		
Universal automatic die head 1/16 – 2" quick-change die head instead of changing the dies	341000 RR	778,50
Changeover valve, for reversing flow direction of the coolant-lubricant pump for cutting left-handed threads with REMS Magnum 2010, 2020, 3010, 3020, 4010 and 4020	342080RX	143,24
REMS cutter wheel St 1/4 - 4", s 8	341614R	15,47
Thread-cutting oil see page 47.		
Nipple holder see page 46.		
REMS Herkules material supports, see page 107.		
REMS roll grooving attachment for pipe grooving, see page 48.	347000R	2.242,08





^{*}T versions with REMS roll grooving device for roll grooving can only be used up to DN 200, 8".

Robust, compact high performance machine for threading, cutting, deburring, threading of nipples, roll grooving. For installation, metalworking, industry. For job site and workshop.

Pipe threads $(\frac{1}{16})$ $\frac{1}{2}$ - 3", 16 - 63 mm **Bolt threads** (6) 18-60 mm, $\frac{1}{2}-2$ "

Thread types see page 40.

Pipe grooving

with REMS roll grooving attachment

DN 25-300 1 - 12"

REMS Magnum - the super machine up to 3". Exceptionally round and clean threads up to 3" by using 5 threading dies.

Operating principle

Rotating material – stationary tools.

Design

Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 3000 L-T only 79 kg. Large work and chip compartment. Tool support. 2 versions:

- Light version L-T with removable large oil basin and chip tray.
- Version T with integrated, even larger oil basin and chip tray.

For workbench. Stand, collapsible wheel stand or wheel stand with material shelf, as an accessory, for easy transport, optimum working height and stable positioning.

Extremely powerful and fast. Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:

- Strong universal motor, 1700 W.
- Overload protection. Spindle speed 23 rpm.
- Pole-reversible capacitor motor, 2100 W. Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. Extremely quiet running.
- Pole-reversible 3~ induction motor, 2000 W. Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. Extremely quiet running.

Operator-friendly safety foot switch with emergency-stop, 2-step. Foot switch, can be loaded with the full body weight during operation.

Proven quick-action hammer chuck, self-tightening. No slipping of pipes. Large space between chuck and centering device ensures secure clamping of long pipes. Rear centering device for alignment of the material. Collets are available for clamping pipes < \emptyset ½" and bolts < \emptyset 18 mm.

Automatic lubrication and cooling

Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head

Only 1 universal automatic die head each for the sizes 1/16-2" and 21/2-3" for all threads, including long threads; automatic opening with automatic thread-lengthstop for tapered threads. 5 dies $2 \ensuremath{\ensuremath{\cancel{1}}} - 3\ensuremath{\ensuremath{}}$ ensure a favourable distribution of the cutting force onto the pipe, hence round and clean threads. Fast and easy adjustment of thread size. Simple and fast change of dies through lock-in positioning in die holder.

Dies

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter

Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer

Robust, easy-to-handle deburring device for adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.


For $2\frac{1}{2}$ – 3" and $\frac{1}{2}$ – 2" one complete tool set each adapted to the work range with universal die head, pipe cutter, inner-pipe-deburring device, pressing lever, dies.



German Quality Product









Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with automatic internal clamping REMS Nippelfix $\frac{1}{2}$ – 3" (4") or with manual internal clamping REMS Nippelspanner (page 46).

REMS roll grooving attachment

Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25–300, 1–12" (page 48).

Supply format


REMS Magnum. Threading machine for pipe threads (V_{16}) $\frac{1}{2}$ – 3", 16 – 63 mm, bolt threads (6) 18 – 60 mm, $\frac{1}{2}$ – 2". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling. With tool sets $\frac{1}{16}$ – 2" and/or $2\frac{1}{2}$ – 3", each consisting of universal automatic die head for all threads, also long threads; automatic opening, with automatic thread-length-stop for tapered threads, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand, pipe cutter, inner pipe deburrer, pressing lever. Tool support. Choice of 3 motors. Version L-T with removable large oil basin and chip tray. Version T with integrated, even larger oil basin and chip tray. For workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.

Description	Version/Equipment	ArtNo.	€
3000 L-T	Universal motor 230 V or 110 V, 50 – 60 Hz, 1700 W. 23 rpm. Equipment R 2½ – 3 Equipment R ½ – 3	380303R220 380309R220	5.625,96 6.923,46
3010 L-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R 2½ – 3 Equipment R ½ – 3	380304R220 380310R220	5.926,98 7.224,48
3020 L-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R 2½ – 3 Equipment R ½ – 3	380305R380 380311R380	6.144,96 7.442,46
3000 T*	Universal motor 230 V or 110 V, 50 – 60 Hz, 1700 W. 23 rpm. Equipment R 2½ – 3 Equipment R ½ – 3	380306R220 380312R220	6.560,16 7.857,66
3010 T*	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R 2½ – 3 Equipment R ½ – 3	380307 R220 380313 R220	6.861,18 8.158,68
3020 T*	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R 2½ – 3 Equipment R ½ – 3	380308 R380 380314 R380	7.079,16 8.376,66

Other voltages and NPT versions on request.

Accessories

Description	ArtNo.	€
Stand	344105R	290,64
Wheel stand with material shelf	344100R	493,05
Collapsible wheel stand	344150R	705,84
Dies see page 40.		
Tool set R $\frac{1}{2}$ – 2" complete with universal automatic die head $\frac{1}{6}$ – 2", dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R $\frac{1}{2}$ – $\frac{3}{4}$ " and R 1 – 2" right-hand, pipe cutter, inner pipe deburrer, pressing lever.	340100 RR	1.297,50
Universal automatic die head 1/16 – 2" and others	341000RR	778,50
Universal automatic die head 2½ – 3"	381050R	1.027,62
Universal automatic die head 2½ – 4"	381000R	1.816,50
Changeover valve, for reversing flow direction of the coolant-lubricant pump for cutting left-handed threads with REMS Magnum 2010, 2020, 3010, 3020, 4010 and 4020	342080 RX	143,24
REMS cutter wheel St 1/8 - 4", s 8	341614R	15,47
REMS cutter wheel St 1 – 4", s 12	381622R	35,60
Thread-cutting oil see page 47.		
Nipple holder see page 46.		
REMS Herkules material supports, see page 107.		
REMS roll grooving attachment		
for pipe grooving, see page 48.	347000R	2.242,08

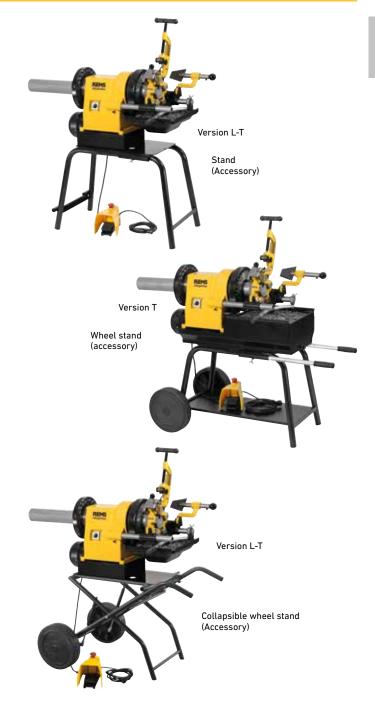



 $^{^{*}\}text{T}$ versions with REMS roll grooving device for roll grooving can only be used up to DN 200, 8".

Robust, compact high performance machine for threading, cutting, deburring, threading of nipples, roll grooving. For installation, metalworking, industry. For job site and workshop.

Pipe threads (1/16) 1/2 - 4", 18 - 63 mm Bolt threads (6) 20 - 60 mm, 1/2 - 2"

Thread types see page 40.

Pipe grooving

with REMS roll grooving attachment

DN 25-300 1-12"

REMS Magnum – the super machine up to 4". Exceptionally round and clean threads up to 4" by using 6 threading dies.

Operating principle

Rotating material - stationary tools.

Design

Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 4000 L-T only 81 kg. Large work and chip compartment. Tool support. 2 versions:

- Light version L-T with removable large oil basin and chip tray.
- Version T with integrated, even larger oil basin and chip tray.

For workbench. Stand, collapsible wheel stand or wheel stand with material shelf, as an accessory, for easy transport, optimum working height and stable positioning.

Drive

Extremely powerful and fast. Completely maintenance-free gear which runs in a sealed oil bath.

Choice of 3 powerful motors:

- Strong universal motor, 1700 W.
- Overload protection. Spindle speed 23 rpm.
- Pole-reversible capacitor motor, 2100 W.
 Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. Extremely quiet running.
- Pole-reversible 3~ induction motor, 2000 W.
 Overload protection. 2 spindle speeds 20 and 10 rpm, also under full load. Extremely quiet running.

Operator-friendly safety foot switch with emergency-stop, 2-step. Foot switch, can be loaded with the full body weight during operation.

Chuck

Proven quick-action hammer chuck, self-tightening. No slipping of pipes. Large space between chuck and centering device ensures secure clamping of long pipes. Rear centering device for alignment of the material. Collets are available for clamping pipes < 0.12" and bolts < 0.18 mm.

Automatic lubrication and cooling

Robust, proven oil pump with high pumping volume. Optimized oil distribution directly onto the threading point through the die head ensures clean threads and long service life of dies, gear and motor.

Universal automatic die head

Only 1 universal automatic die head each for the sizes 1/16-2" and $2\frac{1}{2}-4$ " for all threads, including long threads; automatic opening with automatic thread-length-stop for tapered threads. 6 dies $2\frac{1}{2}-4$ " ensure a favourable distribution of the cutting force onto the pipe, hence round and clean threads. Fast and easy adjustment of thread size. Simple and fast change of dies through lock-in positioning in die holder.

Dies

The proven, indestructible REMS quality dies with precise cutting geometry ensure an excellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for extremely long die life.

Pipe cutter

Self centering. Robust body made of forged steel. Ergonomic, wide handle for powerful infeed of spindle. Specially hardened cutter wheel in tough-hard REMS die-steel ensures long service life.

Inner pipe deburrer

Robust, easy-to-handle deburring device for adjustable deburring positioning. Specially hardened and designed deburring blade ensures easy deburring and extremely long service life. Two cutting edges for optimum chip flow, specially for small diameters.

Tool sets

For $2\frac{1}{2}-4$ " and $\frac{1}{2}-2$ " one complete tool set each adapted to the work range with universal die head, pipe cutter, inner-pipe-deburring device, pressing lever, dies.



German Quality Product











Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with automatic internal clamping REMS Nippelfix $\frac{1}{2}-4^{\circ}$ or with manual internal clamping REMS Nippelspanner $\frac{3}{2}-2^{\circ}$ (page 46).

REMS roll grooving attachment

Robust, compact roll grooving attachment with oil hydraulic in-feed for pipe grooving of grooved coupling systems DN 25–300, 1–12" (page 48).

Supply format

REMS Magnum. Threading machine for pipe threads ($\frac{1}{16}$) $\frac{1}{2}$ –4", $\frac{1}{6}$ –63 mm, bolt threads (6) 18 –60 mm, $\frac{1}{2}$ –2". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling. With tool sets $\frac{1}{16}$ – 2" and/or $2\frac{1}{2}$ – 4", each consisting of universal automatic die head for all threads, also long threads; automatic opening, with automatic thread-length-stop for tapered threads, dies for pipe threads, tapered, ISO 7-1, EN 10226 (DIN 2999, BSPT) R right-hand, pipe cutter, inner pipe deburrer, pressing lever. Tool support. Choice of 3 motors. Version L-T with removable large oil basin and chip tray. Version T with integrated, even larger oil basin and chip tray. For workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.

Description	Version/Equipment	ArtNo.	€
4000 L-T	Universal motor 230 V or 110 V, 50 – 60 Hz, 1700 W. 23 rpm. Equipment R ½ – 2 Equipment R 2½ – 4 Equipment R ½ – 4	380447 R220 380441 R220 380444 R220	5.397,60 6.466,74 7.764,24
4010 L-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R ½-2 Equipment R 2½-4 Equipment R ½-4	380448R220 380442R220 380445R220	5.698,62 6.767,76 8.065,26
4020 L-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R 2½ –4 Equipment R ½ –4	380443R380 380446R380	6.985,74 8.283,24
4000 T*	Universal motor 230 V or 110 V, 50 – 60 Hz, 1700 W. 23 rpm. Equipment R 2½ – 4 Equipment R ½ – 4	380426R220 380429R220	7.400,94 8.698,44
4010 T*	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R 2½ – 4 Equipment R ½ – 4	380427R220 380430R220	7.701,96 8.999,46
4020 T*	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 20/10 rpm, also under full load. Extremely quiet running. Equipment R 2½ – 4 Equipment R ½ – 4	380428R380 380431R380	7.919,94 9.217,44

Description	ArtNo.	€
Stand	344105R	290,64
Wheel stand with material shelf	344100R	493,05
Collapsible wheel stand	344150R	705,84
Dies see page 40.		
Tool set R $\frac{1}{2}$ – 2" complete with universal automatic die head $\frac{1}{6}$ – 2", dies for pipe threads, tapered, ISO 7–1, EN 10226 (DIN 2999, BSPT) R $\frac{1}{2}$ – $\frac{3}{4}$ " and R 1 – 2" right-hand, pipe cutter, inner pipe deburrer, pressing lever.	340100 RR	1.297,50
Universal automatic die head 1/16 – 2" and others	341000RR	778,50
Universal automatic die head 2½ – 4"	381000R	1.816,50
Changeover valve, for reversing flow direction of the coolant-lubricant pump for cutting left-handed threads with REMS Magnum 2010, 2020, 3010, 3020, 4010 and 4020	342080RX	143,24
REMS cutter wheel St 1/6 - 4", s 8	341614R	15,47
REMS cutter wheel St 1 – 4", s 12	381622R	35,60
Thread-cutting oil see page 47.		
Nipple holder see page 46.		
REMS Herkules material supports, see page 107.		
REMS roll grooving attachment		
for pipe grooving, see page 48.	347000R	2.242,08





Other voltages and NPT versions on request.
*T versions with REMS roll grooving device for roll grooving can only be used up to DN 200, 8".

REMS dies (set)

The proven REMS quality dies with precise cutting geometry ensure anexcellent start-cutting performance, easy threading and clean threads. Dies in a high-quality special-grade steel, fully tempered and hardened, for materials < 500 N/mm² (MPa) for extremely long die life.


Dies for other threads (e.g. BSW) on request. HSS dies for materials that are difficult to cut $\geq 500~\text{N/mm}^2$ (MPa) 50 % surcharge. $^{1)}$ Some dies only available in HSS.







For universal automatic die head 1/16 – 2"				
Thread type	Size	ArtNo.	€	
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R ½- ½ HSS¹¹ R ¼- ¾ R ½- ¾ R 1-2	341401 RHSS 341402 RWS 341403 RWS 341404 RWS	492,01 328,01 328,01 328,01	
Pipe threads G parallel, right-hand ISO 228-1 (DIN 259, BSPP)	G ½ - ½ G ½ - ¾ G ½ - ¾ G 1 - 2	341406 RWS 341407 RWS 341408 RWS 341409 RWS	373,68 373,68 373,68 373,68	
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 1/16 – 1/8 HSS ¹⁾ NPT 1/4 – 3/8 NPT 1/2 – 3/4 NPT 1 – 2	341411RHSS 341412RWS 341413RWS 341414RWS	492,01 328,01 328,01 328,01	
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 1/8 NPSM 1/4 – 3/6 NPSM 1/2 – 3/4 HSS ¹⁾ NPSM 1 – 2 HSS ¹⁾	341416 RWS 341417 RWS 341418 RHSS 341419 RHSS	373,68 373,68 560,52 560,52	
Conduit threads Pg DIN 40430	Pg 7 Pg 9 Pg 11 Pg 13.5 Pg 16 Pg 21 Pg 29 Pg 36 Pg 42 Pg 48	341466 RWS 341467 RWS 341468 RWS 341449 RWS 341470 RWS 341471 RWS 341472 RWS 341473 RWS 341475 RWS	373,68 373,68 373,68 373,68 373,68 373,68 373,68 373,68 373,68	
Conduit threads M EN 60423	M 16 × 1.5 M 20 × 1.5 M 25 × 1.5 M 32 × 1.5 M 40 × 1.5 M 50 × 1.5 M 63 × 1.5	341493 RWS 341494 RWS 341495 RWS 341496 RWS 341497 RWS 341498 RWS 341499 RWS	373,68 373,68 373,68 373,68 373,68 373,68 373,68	
Metric bolt threads M ISO 261 (DIN 13)	M 6 M 8 M 10 M 12 M 14 M 16 M 18 M 20 M 22 M 24 M 27 M 30 M 33 M 36 M 39 M 42 M 45 M 45 M 45 M 48 M 52 M 56 HSS ¹⁾ M 60 HSS ¹⁾	341426 RWS 341427 RWS 341429 RWS 341429 RWS 341431 RWS 341431 RWS 341432 RWS 341433 RWS 341435 RWS 341436 RWS 341446 RWS 341446 RWS 341441 RWS 341442 RWS 341442 RWS 341445 RWS 341445 RWS 341445 RWS 341446 RWS 341446 RWS	373,68 373,68 373,68 373,68 373,68 373,68 373,68 373,68 373,68 404,82 404,82 404,82 404,82 404,82 404,82 404,82	
Bolt threads UNC Unified Inch Screw Thread ASME B1.1	UNC ¼ - 20 HSS¹¹ UNC 5/16-18 UNC ¾ - 16 HSS¹¹ UNC ½-13 HSS¹¹ UNC ½-13 HSS¹¹ UNC ¾-12 UNC ¾-10 HSS¹¹ UNC ½-9 HSS¹¹ UNC 1½-7 UNC 1½-7 UNC 1½-6 HSS¹¹ UNC 1½-6 UNC 1½-6	341476 RHSS 341477 RWS 341478 RHSS 341479 RWS 341480 RHSS 341481 RWS 341482 RHSS 341482 RHSS 341484 RHSS 341486 RWS 341487 RHSS 341487 RHSS 341489 RWS 341497 RHSS 341490 RWS	560,52 373,68 560,52 373,68 492,01 492,01 492,01 492,01 492,01 492,01 492,01 492,01 492,01	

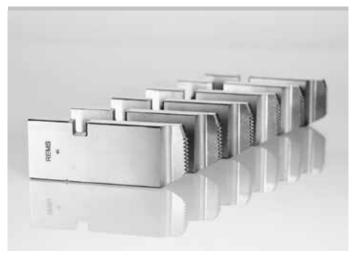

German Quality Product









For universal automatic die head 2½ – 3"				
Thread type	Size	ArtNo.	€	
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 2½-3	381430 RWS	456,72	
Pipe threads G parallel, right- hand ISO 228-1 (DIN 259, BSPP)	G 2½-3 HSS ¹⁾	381431 RHSS	739,06	
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 2½ – 3 HSS ¹⁾	381432 RHSS	685,08	
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 2½ –3 HSS ¹⁾	381433 RHSS	739,06	





For universal automatic die head 2½ – 4"			
Thread type	Size	ArtNo.	€
Pipe threads R tapered, right-hand ISO 7-1, EN 10226 (DIN 2999, BSPT)	R 2½ – 4	381401RWS	689,23
Pipe threads G parallel, right- hand ISO 228-1 (DIN 259, BSPP)	G 2½-4 HSS ¹⁾	381405RHSS	1.098,20
Pipe threads NPT tapered, right-hand Taper Pipe Thread ASME B1.20.1	NPT 2½ – 4 HSS ¹⁾	381410RHSS	1.033,85
Pipe threads NPSM parallel, right-hand Straight Pipe Thread ASME B1.20.1	NPSM 2½ – 4 HSS ¹⁾	381415RHSS	1.098,20

40 All prices excl. VAT

UNC 2-4.5

341491 RWS

328,01



Semi-automatic high-performance machine for efficient cutting of bolt and pipe threads. For industry, metalworking, installation.

1 of maastry, metatw	orking, motattation.	
Bolt threads		6-72 mm
		1/4 – 23/4"
Pipe threads	1/16-	-2½", 16–63 mm
Tolerance class		
corresponding to ISC	261 (DIN 13)	"medium" (6 g)
Thread length	≤ Ø 30 mm	unlimited
	≤ Ø 72 mm	≤ 200 mm
Chamfering	Range	7 – 62 mm
	Chamfered Ø	≥ 7 mm
	Maximum chamfe	er 7 mm
	Chamfer angle	45°
Peeling	Range	7 – 62 mm
	Peeled Ø	≥ 7 mm
T	, ,	

Thread types see page 44.

REMS Unimat 75 - high efficiency.

Tangential-chaser-threading-system. Large threading range. Fast working, short resetting time. For single and series production. Low hourly rate for the machine. Simple operation. Relieves expensive turning machines and specialists.

Operating principle

Stationary material - rotating die head.

Design

Compact, rugged design for continuous use. Die head with regrindable tangential chasers in self centering holder system. After start-cutting with feed lever and rack mechanism self feeding action of die head (no guide thread). Welded, sturdy machine stand with large oil compartment and removeable chip drawer.

Drive

Indestructible planetary gear with annulus gear for long threads up to 0 30 mm. Proven and powerful pole-reversible three-phase motor, specially designed for threading, with hollow shaft, 2000/2300 W. Overload protection. Reverse switch for cutting right and left-hand threads. High operating speed, 2 spindle speeds 70 and 35 rpm.

Clamping device

Self-centering universal vice for the complete range with specially toothed and hardened clamping jaws. Choice of manual or hydraulic clamping with operation by foot switch (working pressure 6 bar).

Special clamping jaws

For drawn material, stud bolts, hex screws and pipe nipples, as accessory.

Automatic lubrication and cooling

Robust, proven oil pump with high pumping volume. Ample oil volume ensures longer service life of chasers, gear and motor.

Universal automatic die head

Only **one** universal automatic die head for all threads. Fine adjustment of thread diameter with spindle and scale. Die head closes automatically and opens automatically when the required thread length is reached. After starting the thread via feed lever and rack the chaser-system initiates an automatic feed-forward of the die head. All threads can be cut in a single pass. Copying unit for tapered threads. Instead of changing the dies, additional quick-change die heads ensure shorter resetting time.

Chasers

The proven regrindable REMS tangential chasers with precise cutting geometry ensure an excellent start-cutting performance and clean threads. Tool steel chasers made of special hardened steel for material < 500 N/mm² (MPa). HSS chasers for hard-to-machine material \geq 500 N/mm² (MPa). The chasers sit in a special holder system. Chasers and holders together form a threading set.

Thread cutting on rebar

Special chaser dies M with additional, ground cut for cutting threads on rebar in a single pass. Driven by REMS Unimat 75 with oil-hydraulic/pneumatic vice, for high clamping pressure.



German Quality Product







Thread-cutting oil

REMS Sanitol and REMS Spezial (page 47). Specially developed for threading. High cooling and lubricating effect. Essential for clean threads and longer service life of dies, tools and machines.

Nipple-threading

Efficient with special clamping jaws $\frac{1}{16} - \frac{1}{4}$ " or with the automatic internal clamping REMS Nippelfix $\frac{1}{2} - \frac{2}{2}$ " or with the manual internal clamping REMS Nippelspanner $\frac{3}{6} - \frac{2}{2}$ " (page 46).

Supply format

REMS Unimat 75 Basic. Semi-automatic threading machine for bolt threads 6–72 mm, %–2%", pipe threads %-6–2%", 16–63 mm. Machine on stand. Pole-reversible 3~ induction motor with hollow shaft, 400 V, 50 Hz, 2000/2300 W, right and left-hand rotation. Die head speed 70 and 35 rpm. Self-centering universal chuck for the complete clamping range, choice of manual or oil-hydraulic/pneumatic operation. Automatic lubrication and cooling. 1 universal automatic die head for all threads, opens and closes automatically. Without threading sets, without closing lever. Electric locking system of safety cover. Adjustment gauge. Wrench. In transport case.

Description	Version	ArtNo.	€
REMS Unimat 75 Basic mS	manual clamping device	750003R380	21.964,08
REMS Unimat 75 Basic pS	oil-hydraulic/pneumatic vice clamping device	750004R380	25.794,30

Other voltages on request.



Accessories

Description	ArtNo.	€
Chasers and holders (threading sets) and chasers see	e page 44.	
Universal automatic die head,		
without threading sets, without closing lever	751000	1.348,36
Closing lever for closing and opening the chasers		
R for taper pipe threads, right-hand	751040R90	176,46
R-L for taper pipe threads, left-hand	751050R90	176,46
G for cylindrical pipe threads, right-hand	751060R90	176,46
G-L for cylindrical pipe threads, left-hand	751070R90	176,46
M for all bolt threads, right-hand	751080R90	176,46
M-L for all bolt threads, left-hand	751090R90	176,46
Chamfering/peeling die head 45°, Ø 7 – 62 mm,		
with chamfering/peeling chasers 45°, Ø 7–62 mm,		
HSS, with holder	751100	3.316,41
Chamfering/peeling die head 45°, Ø 7–62 mm,		
without threading sets	751102	1.404,41
Chamfering/peeling chasers 45°, Ø 7 – 46 mm,		
HSS, with holder	751096	956,00
Chamfering/peeling chasers 45°, Ø 40 – 62 mm,		
HSS, with holder	751098	956,00
Chamfering/peeling chasers 45°, Ø 7 – 62 mm,		
pack of 4, with holder	751097	552,63
Special clamping jaws, pair, for drawn material,		
stud bolts and hex screws. Workpiece length		
protrude from vice without thread,		
minimum 15 mm, Ø 6 – 42 mm	753240	1.432,44
Thread-cutting oil see page 47.		
Nipple holder see page 46.		
REMS Herkules material supports, see page 107.		






German Quality Product

Chasers and holders (threading set)

The proven regrindable REMS tangential chasers with precise cutting geometry ensure an excellent start-cutting performance and clean threads. Tool steel chasers made of special hardened steel for material < 500 N/mm^2 (MPa). HSS chasers for hard-to-machine material $\geq 500 \text{ N/mm}^2$ (MPa). The chasers sit in a special holder system. Chasers and holders together form a threading set.

in a special holder system. Chaser	's and holders together	form a thr	eading set.
Thread type	Size	ArtNo.	€
Pipe threads R tapered,	R 1/16-1/8	759250RWS	817,94
right-hand ISO 7-1, EN 10226	R 1/4 - 3/8	759251 RWS	817,94
(DIN 2999, BSPT)	R ½ - ¾	759252 RWS	817,94
	R 1-2	759253RWS	817,94
	R 21/2	759254RWS	817,94
Pine threads G parallel	G 1/16 - 1/8	759255RWS	817,94
Pipe threads G parallel, right-hand ISO 228-1	G 1/4 – 3/8 HSS ¹⁾	759256RHSS	1.004,78
(DIN 259, BSPP)		1 1	
(DIN 237, BSPP)	G ½ – ¾ HSS¹)	759257RHSS	1.004,78
	G 1 – 2 HSS ¹⁾	759258RHSS	1.004,78
	G 2½ HSS ¹⁾	759259 RHSS	1.004,78
Pipe threads NPT tapered,	NPT 1/16 – 1/8	759360RWS	817,94
right-hand Taper Pipe Thread	NPT 1/4 - 3/8 HSS ¹⁾	759361 RHSS	1.004,78
ASME B1. 20.1	NPT ½ – ¾ HSS ¹⁾	759362RHSS	1.004,78
	NPT 1 – 2 HSS ¹⁾	759363RHSS	1.004,78
	NPT 2½ HSS¹)	759364RHSS	1.004,78
Pipe threads NPSM parallel,	NPSM 1/16-1/8	759365 RWS	817,94
right-hand Straight Pipe Thread	NPSM 1/4 - 3/8	759366RWS	817,94
ASME B1. 20.1	NPSM ½ – ¾ HSS ¹⁾	759367 RHSS	1.004,78
-	NPSM 1 – 2 HSS ¹⁾	759368RHSS	1.004,78
Conduit threads Pg	Pg 7	759260RWS	817,94
DIN 40430	Pg 9 – 16	759261 RWS	817,94
DIN 40430	-	1 1	
	Pg 21 – 48	759262RWS	817,94
Conduit threads M	M 16 – 20 × 1.5	759263RWS	817,94
EN 60423	M 25 – 32 × 1.5	759264RWS	817,94
	M 40 – 50 × 1.5	759265RWS	817,94
	M 63 × 1.5 HSS ¹⁾	759330RHSS	1.004,78
Threads M for rebar	M 14 – 16 HSS	759274 RHSSZ	1.004,78
ISO 261 (DIN 13)	M 18-22 HSS	759275 RHSSZ	1.004,78
	M 24-27 HSS	759276 RHSSZ	1.004,78
	M 30-33 HSS	759277 RHSSZ	1.004,78
	M 36-39 HSS	759278 RHSSZ	1.126,23
	M 42-45 HSS	759279 RHSSZ	1.126,23
Metric bolt threads M	M 6 HSS ¹⁾	759270RHSS	1.004,78
ISO 261 (DIN 13)	M 8	759271RWS	817,94
130 201 (BIT 10)	M 10	759272RWS	817,94
	M 12	759273RWS	817,94
	M 14-16	759274RWS	817,94
	M 18-22	759275RWS	817,94
	M 24-27	759276 RWS	817,94
	M 30-33	759277RWS	817,94
	M 36-39		
	M 42-45	759278 RWS 759279 RWS	903,06 903,06
	M 48-52 HSS ¹⁾	759280RHSS	1.126,23
		1 1	
	M 56-60 HSS ¹⁾	759281 RHSS	1.126,23
	M 64-72 HSS ¹⁾	759282RHSS	1.126,23
Bolt threads UNC	UNC ¼ -20	759370 RWS	817,94
Unified Inch Screw Thread	UNC 5/16 – 18	759371 RWS	817,94
ASME B1.1	UNC % – 16	759372RWS	817,94
	UNC 7/16 – 14	759373RWS	817,94
	UNC ½ – 13	759374RWS	817,94
	UNC 16-12	759375RWS	817,94
	UNC % – 11	759376 RWS	817,94
	UNC ¾ - 10	759377RWS	817,94
	UNC % - 9	759378 RWS	817,94
	UNC 1 – 8 HSS ¹⁾	759379RHSS	1.004,78
	UNC 1 - 0 H33		
	UNC 1% – 1% – 7	759380RWS	817,94
			817,94 903,06
	UNC 11/8 - 11/4 - 7 UNC 13/8 - 11/2 - 6	759380RWS 759381RWS	903,06
	UNC 11/8 - 11/4 - 7	759380RWS	

Dies for other threads (e.g. bicycle threads, fine threads, BSW) and HSS chaser dies for materials above 500 N/mm² (MPa) that are difficult to cut on request. Dies with HSS chaser dies with 50% surcharge on chaser dies. "Some chasers only available in HSS. Threading sets for left-hand threads 50% extra charge on chasers.



German Quality Product

Chasers (set)

The proven regrindable REMS tangential chasers with precise cutting geometry ensure an excellent start-cutting performance and clean threads. Tool steel chasers made of special hardened steel for material < 500 N/mm² (MPa). HSS chasers for hard-to-machine material > 500 N/mm² (MPa).

HSS chasers for hard-to-machine			MFd).
	Size		
Thread type		ArtNo.	€
Pipe threads R tapered,	R ½16-1/8	751501 RWS	373,68
right-hand ISO 7-1, EN 10226	R 1/4 - 3/8	751502 RWS	373,68
(DIN 2999, BSPT)	R ½ – ¾	751503RWS	373,68
	R 1 – 2½	751504RWS	373,68
Pipe threads G parallel,	G 1/16 - 1/8 HSS1)	751505RHSS	560,52
right-hand ISO 228-1	G 1/4 – 3/8	751506RHSS	560,52
(DIN 259, BSPP)	G ½ – ¾ HSS1)	751507RHSS	560,52
	G 1 – 2½ HSS ¹⁾	751508RHSS	560,52
Pipe threads NPT tapered,	NPT 1/16 - 1/8	751544RWS	373,68
right-hand Taper Pipe Thread	NPT 1/4 - 3/8 HSS1)	751545 RHSS	560,52
ASME B1. 20.1	NPT 1/2 - 3/4 HSS1)	751546 RHSS	560,52
	NPT 1 – 2 HSS ¹⁾	751547 RHSS	560,52
	NPT 21/2 HSS1)	751548 RHSS	560,52
Pipe threads NPSM parallel,	NPSM 1/16 - 1/8	751549 RWS	373,68
right-hand Straight Pipe Thread	NPSM 1/4 – 3/8	751550 RWS	373,68
ASME B1. 20.1	NPSM ½ – ¾ HSS ¹⁾	751551 RHSS	560,52
7.51-12 51: 25:1	NPSM 1 – 2	751551RH55	373,68
Conduit throads Da		751509 RWS	
Conduit threads Pg DIN 40430	Pg 7		373,68
DIN 40430	Pg 9-16	751510 RWS	373,68
	Pg 21 – 48	751511RWS	373,68
Conduit threads M EN 60423	M 16-63×1.5 (M 10)	751518RWS	373,68
Threads M for rebar	M 14-16 HSS	751520 RHSSZ	560,52
ISO 261 (DIN 13)	M 18 – 22 HSS	751521 RHSSZ	560,52
	M 24-27 HSS	751522 RHSSZ	560,52
	M 30-33 HSS	751523 RHSSZ	560,52
	M 36-39 HSS	751524 RHSSZ	669,51
	M 42-45 HSS	751525 RHSSZ	669,51
Metric bolt threads M	M 6	751516 RHSS	560,52
ISO 261 (DIN 13)	M 8	751517 RWS	373,68
	M 10 (M 16-63×1.5)	751518 RWS	373,68
	M 12	751519 RWS	373,68
	M 14-16	751520 RWS	373,68
	M 18 – 22	751521 RWS	373,68
	M 24-27	751522 RWS	373,68
	M 30-33	751523 RWS	373,68
	M 36-39	751524 RWS	446,34
	M 42-45	751525 RWS	446,34
	M 48-52	751526 RWS	446,34
	M 56-60	751527 RWS	446,34
	M 64-72	751528 RWS	446,34
Bolt threads UNC	UNC 1/4 - 20	751557 RWS	373,68
Unified Inch Screw Thread	UNC 5/16 - 18	751558 RWS	373,68
ASME B1.1	UNC 3/8 - 16	751559 RWS	373,68
	UNC 7/16 - 14	751560 RWS	373,68
	UNC 1/2 - 13	751561 RWS	373,68
	UNC 16-12	751562RWS	373,68
	UNC 5/8 - 11	751563RWS	373,68
	UNC 3/4 - 10	751564RWS	373,68
	UNC %-9	751565RWS	373,68
	UNC 1 - 8 HSS1)	751566 RHSSZ	560,52
	UNC 11/8 - 11/4 - 7	751567RWS	373,68
	UNC 13/8 - 11/2 - 6	751568RWS	446,34
	UNC 134 - 5	751569 RWS	446,34
	UNC 2-21/4-4.5	751570 RWS	446,34
	UNC 2½-2¾-4	751571 RWS	446,34

Chaser dies for other threads (e.g. bicycle threads, fine threads, BSW) and HSS chaser dies for materials above 500 N/mm² (MPa) that are difficult to cut on request. HSS chaser dies with 50% surcharge. "Some chasers only available in HSS. Chasers for left-hand threads 50% extra charge.

Taper Pipe Threads

Whitworth Pipe Thread ISO 7-1, EN 10226 (DIN 2999, BSPT) External thread taper 1:16 Flank angle 55°

Nominal Outside Ø Size T.P.I. of thread R BSPT mm 1/16 7.723 28 1/8 9.728 28 13.157 1/4 19 16.662 19 20.955 14 1/2 3/4 26.441 14 33.249 11 1 1/4 41.910 11 1 ½ 47.803 11 2 59.614 11 2 1/2 75.184 11 3 87.884 11 113.030 4 11

Standard Taper Pipe Thread NPT, ASME B 1.20.1 External thread taper 1:16 Flank angle 60°

'	T talk aligic 00				
Nominal Size NPT	Outside Ø of thread mm	T.P.I.			
1/16	7.938	27			
1/8	10.287	27			
1/4	13.716	18			
3/8	17.145	18			
1/2	21.336	14			
3/4	26.670	14			
1	33.401	11.5			
1 1/4	42.164	11.5			
1 ½	48.260	11.5			
2	60.325	11.5			
2 ½	73.025	8			
3	88.900	8			
3 ½	101.600	8			
4	114.300	8			

Parallel PipeThreads

Whitworth Pipe Thread ISO 228-1 (DIN 259, BSPP) External thread parallel Flank angle 55°

Nominal Size G BSPP	Outside Ø of thread mm	T.P.I.
1/16	7.723	28
1/8	9.728	28
1/4	13.157	19
3/8	16.662	19
1/2	20.955	14
3/4	26.441	14
1	33.249	11
1 1/4	41.910	11
1 ½	47.803	11
2	59.614	11
2 1/2	75.184	11
3	87.884	11
3 1/2	100.330	11
4	113.030	11

Straight Pipe Thread for Fixtures NPSM, ASME B 1.20.1 External thread parallel Flank angle 60°

Flank angle ou				
Nominal Size NPSM	Outside Ø of thread mm	T.P.I.		
1/8	10.083	27		
1/4	13.360	18		
3/8	16.815	18		
1/2	20.904	14		
3/4	26.264	14		
1	32.842	11.5		
1 1/4	41.605	11.5		
1 ½	47.676	11.5		
2	59.715	11.5		
2 1/2	72.161	8		
3	88.062	8		
3 1/2	100.787	8		
4	113.436	8		

Metric Bolt Thread Metric ISO Thread

ISO 261 (DIN 13)

External thread

Flank angle 60°

Outside Ø

of thread

mm

5.974

7.972

9.968

11.966

13.962

15.962

17.958

19.958 21.958

23.952

26.952

29.947

32 947

35.940

38.940

41.937

44.937

47.929

51.929

55.925

59.925

63.920

67.920

71.920

Pitch

mm

1 1.25

1.5

1.75

2

2

2.5 2.5

2.5

3

3

3.5

3.5

4

4

4.5

4.5

5

5

5.5

5.5

6

6

Nominal

Size

М

6

8

10

12

14

16 18

20

22 24

27

30

33

36

39

42

45

48

52 56

60

64

68

72

American and British Bolt Threads

Unified Inch Screw Thread	British Standard Parallel Screw
UNC, ASME B 1.1	Thread of Whitworth Form B.S.W.
External thread	BS 84 (obsolete): External thread
Flank angle 60°	Flank angle 55°

F	lank angle 60	0	Flank angle 55°		0	
Nominal Size UNC	Outside Ø of thread mm	T.P.I.		Nominal Size BSW	Outside Ø of thread mm	T.P.I.
1/4	6.322	20		1/4	6.350	20
5/16	7.907	18		5/16	7.937	18
3/8	9.491	16		3/8	9.525	16
7/16	11.076	14		7/16	11.112	14
1/2	12.661	13		1/2	12.700	12
%16	14.246	12		E/		44
5/8	15.834	11		5/8	15.875	11
3/4	19.004	10		3/4	19.050	10
7∕8	22.176	9		7∕8	22.225	9
1	25.349	8		1	25.400	8
1 1/8	28.519	7		1 1/8	28.575	7
1 1/4	31.694	7		1 1/4	31.750	7
1 3/8	34.864	6		1 ½	38.100	6
1 ½	38.039	6		1 3/4	44.450	5
1 3/4	44.381	5				
2	50.726	4.5		2	50.800	4.5
2 1/4	57.076	4.5		2 1/4	57.150	4
2 ½	63.421	4		2 ½	63.500	4

2 3/4

69.850

3.5

Threads for Electric Conduit

Conduit Thread DIN 40 430 External thread parallel Flank angle 80°

Nominal Size Pg	Outside Ø of thread mm	T.P.I.
7	12.5	20
9	15.2	18
11	18.6	18
13.5	20.4	18
16	22.5	18
21	28.3	16
29	37	16
36	47	16
42	54	16
48	59.3	16

Conduit Thread EN 60423 External thread parallel Flank angle 60°

Flank angle 60			
Nominal Size	Outside Ø of thread	Pitch	
М	mm	mm	
16	15.968	1.5	
20	19.968	1.5	
25	24.968	1.5	
32	31.968	1.5	
40	39.968	1.5	
50	49.968	1.5	
63	62 968	1.5	

69.768

2 3/4

REMS Nippelspanner

Manual pipe nipple chuck for internal clamping of short pipe pieces. For universal use.

Nipples and double nipples in standard and special lengths

3/8 - 2"

REMS Nippelspanner – efficient nipple-threading. Any length. Anywhere.

To be used universally for threading machines and for hand die stocks of all types and makes. For opening and non-opening die heads. Ideal accessory for REMS Amigo E, REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact, REMS Amigo 22 V. REMS eva and other makes.

Ideal tool for using up short pipe pieces. Saves time and money.

Chucking and centering of pipe pieces by expanding of specially hardened spring steel segments.

Internal clamping, so no thread required for clamping.

Supply format

REMS Nippelspanner. Manual pipe nipple chuck for internal clamping of short pipe pieces.

Description	Size	ArtNo.	€
REMS Nippelspanner	3/8"	110000R	126,64
	1/2"	110100R	146,36
	3/4"	110200R	167,12
	1"	110300R	229,40
	11/4"	110400R	271,96
	11/2"	110500R	323,86
	2"	110600R	396,52

Supply format

REMS Nippelspanner Set. Manual pipe nipple chuck for internal clamping of short pieces of pipe. In sturdy steel case.

Description	ArtNo.	€
Set ½+¾+1+1¼"	110620R	761,89
Set ½ + ¾ +1+1¼ +1½ +2"	110621 R	1.375,35



German Quality Product



Accessories for threading machines with opening die head

REMS Nippelfix

Automatic pipe nipple chuck for internal clamping of short pipe pieces.

Nipples and double nipples in standard and special lengths

REMS Nippelfix – efficient nipple-threading up to 4". Any length. Anywhere. Automatic internal clamping. Super fast and simple.

For threading machines with opening die head: Pipe turning machines, machines with rotating die head, threading devices.

Ideal tool for using up short pipe pieces. Saves time and money.

Automatic quick-chuck and centering of pipe piece. No tools.

Automatic release after completion of nipple. Production of nipples possible without taking the Nipplefix out of the clamping device.

Internal clamping, so no thread required for clamping.

Specially hardened and ground clamping jaws for fast and safe clamping.

Supply format

REMS Nippelfix. Automatic pipe nipple chuck for internal clamping of short pipe pieces.

Description	Size	ArtNo.	€
REMS Nippelfix	1/2"	111000R	106,91
	3/4"	111100R	127,67
	1"	111200 R	165,04
	11/4"	111300 R	200,33
	1½"	111400R	231,47
	2"	111500 R	270,92
	21/2"	111700R	373,68
	3"	111800 R	482,67
	4"	111900 R	517,96



REMS Nippelfix Set. Automatic pipe nipple chuck for internal clamping of short pieces of pipe. In sturdy steel case.

Description	ArtNo.	€
Set ½ + ¾ + 1 + 1¼"	111620R	666,40
Set ½ + ¾ + 1 + 1¼ + 1½ + 2"	111621R	1.094,05



German Quality Product





High-alloyed mineral oil based thread-cutting oil. For all materials.

For drinking water supplies, comply with local regulations! Mineral oil based thread cutting materials are not permitted for drinking water pipes in AUT, CHE, DEU, DNK and FRA for example.

REMS Spezial – high-alloyed mineral based thread-cutting oil, can be washed out with water. High lubricating and cooling effect.

Specially developed for threading. High lubricating and cooling effect. Essential for clean threads, long service life of dies, tools and machines.

Can be washed out with water, approved by experts.

Also well suited as a cooling lubricant for sawing metals.

REMS Spezial spray without CFC's, so ozone-harmless.

REMS Spezial squirt bottle without propellants. Refillable.

Supply format			
REMS Spezial. High-	alloyed mineral based thread-cu	itting oil.	
Description	Packing	ArtNo.	€
REMS Spezial	5l can	140100R	74,74
•	10 l can	140101 R	149,47
	50 l barrel	140103R	724,52
	600 ml spray	140105R	23,36
	500 ml squirt bottle	140106R	25,74



German Quality Product

REMS Sanitol

Synthetic, mineral oil-free thread-cutting oil.

Specially for drinking water supplies. For all materials.

REMS Sanitol – mineral oil-free, ethanol-free. Completely water soluable. High lubricating and cooling effect.

Developed especially for drinking water pipes but also excellently suitable for universal thread cutting. High lubricating and cooling effect. Essential for clean threads, long service life of dies, tools and machines.

Completely water soluable. Mineral oil-free, ethanol-free. Therefore no negative influence on the drinking water in terms of appearance, smell and taste.

Red in colour for flushing control. Perfect corrosion protector.

Viscosity at -10°C: ≤ 250 mPa s (cP). Pumpable to -28°C.

Also well suited as a cooling lubricant for sawing metals.

REMS Sanitol spray without CFC's, so ozone-harmless.

REMS Sanitol squirt bottle without propellants. Refillable.

Thread-cutting oil



German Quality Product





Supply format

REMS Sanitol. Synthetic, mineral oil free thread-cutting oil specially for drinking water supplies and for universal use.

Description	Packing	ArtNo.	€
REMS Sanitol	5 l can	140110R	174,38
	50 l barrel	140113R	1.656,65
	600 ml spray	140115R	33,94
	500 ml squirt bottle	140116R	37,37

Robust, compact roll grooving attachment with oil hydraulic forward feed for grooving pipes of pipe coupling systems. For installation, sprinkler lines, commercial heating, industry and mining. For job site and workshop.

Stainless steel pipes, copper, aluminium, PVC pipes

REMS roll grooving attachment – compact – universal. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller.

Design

Compact, job site-proven. Robust metal housing for tough use. Handy, easy to transport, only 26 kg. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller. Pressure build-up with hydraulic hand pump. Individually adjustable groove-depth-stop with fine adjustment, for automatic limitation of groove depth. Built-in ring gauge for automatic groove-depth-stop.

Grooving rollers

The proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and precise grooving. Grooving rollers machined from hard-ened special steel ensure extremely long service life. 3 pairs of groove rollers (pressure roller, counter-pressure roller) for the whole working range DN 25–300, 1–12", easy change. Grooving rollers Cu (pressure roller, counterpressure roller) for copper pipe 54–159 mm. Groove rollers INOX (pressure roller made of stainless steel, counter-pressure roller made of toughened, specially hardened steel, nickel-plated) for stainless steel pipes $1-1\frac{1}{2}$ ", 2-6" and 8-12". Grooving rollers for aluminium, PVC pipes on request.

Drive

Only one roll grooving device for REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact, REMS Tornado and REMS Magnum. Fast, simple assembly. 3-face drive shaft of roll grooving attachment for secure clamping and optimum power transmission. Roll grooving attachments for threading machines of other makes, adjusted to support arm distance, diameter of support arm and spindle axis of the corresponding drive machine, on request.



German Quality Product





Supply format

REMS roll grooving attachment. Roll grooving attachment for grooving pipes of pipe coupling systems DN 25–300, 1–12". Roll grooving attachment, hydraulic hand pump, built-in ring gauge for automatic groove-depth-stop, 1 pair of groove rollers (pressure roller, counter-pressure roller) 2–6", Allen key. For REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact, REMS Tornado and REMS Magnum or for other thread cutting machine makes. In a carton.

Description	fit onto	ArtNo.	€
REMS roll grooving attachment	REMS Amigo/ Amigo 2 Compact ¹⁾ REMS Amigo 2 ¹⁾ REMS Tornado ²⁾ REMS Magnum ²⁾	347000R	2.242,08
Roll grooving attachment R 300	Ridgid 300	347001R	2.242,08

- Onversion kit Amigo/Amigo 2/Amigo 2 Compact (Art. No. 347007) required. Can be used for roll grooving devices manufactured from 2014 onwards.
- $^{\rm 2l}$ Can only be used for roll grooving up to DN 200, 8" on T versions. Roll grooving attachments for other makes on request.



Accessories

Description	ArtNo.	€
Grooving rollers 1 – 1½" (pair), for steel pipes	347030	310,36
Grooving rollers INOX 1 – 1½" (pair),		
for stainless steel pipes	347053	747,36
Grooving rollers 2 – 6" (pair), for steel pipes	347035	310,36
Grooving rollers INOX 2 – 6" (pair), for stainless steel pipes	347046	840,78
Grooving rollers 8 – 12" (set), for steel pipes	347040	507,58
Grooving rollers INOX 8 – 12" (pair), for stainless steel pipes	347047	851,16
Grooving rollers Cu 54 – 159 (pair) for Cu pipes	347034	310,36
Conversion kit Amigo / Amigo 2 / Amigo 2 Compact / Amigo 22 V	347007 R	153,62
REMS Herkules material supports, see page 107.		



Powerful roll grooving machine for fast, economical grooving of pipes for pipe coupling systems. For installation, sprinkler lines, commercial heating, industry and mining. For job site and workshop.

Steel pipes DN 25-300 1-12"

s ≤ 7.2 mm

Stainless steel pipes, copper, aluminium, PVC pipes

REMS Collum – electrical roll grooving up to 12". Fast and economical feed of the pressure roller with oil-hydraulic pressure cylinder.

Design

Robust, compact construction suitable for building sites. Favourable dimensions, favourable weight, roll grooving device with drive machine only 31 kg. For work bench. Stand or wheel stand as an accessory, for easy transport, optimum working height and stable positioning.

Drive

Fast and powerful, e.g. roll grooving of 6" steel pipe with REMS Collum in just 52 s. Sturdy, compact gear, maintenance-free. Robust, powerful 1200 W universal motor (REMS Collum and REMS Collum 2 Compact) or 1700 W universal motor (REMS Collum 2) for intensive use at large dimensions. Safety switch. Foot switch with coupling for ergonomic working as an accessory.

Roll grooving attachment

Compact, job site-proven. Robust metal housing for tough use. Handy, easy to transport, only 26 kg. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller. Pressure build-up with hydraulic hand pump. Built-in ring gauge for automatic groove-depth-stop.

Grooving rollers

The proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and precise grooving. Grooving rollers machined from hard-ened special steel ensure extremely long service life. 3 pairs of groove rollers (pressure roller, counter-pressure roller) for the whole working range DN 25–300, 1–12", easy change. Grooving rollers Cu (pressure roller, counterpressure roller) for copper pipe 54–159 mm. Groove rollers INOX (pressure roller made of stainless steel, counter-pressure roller made of toughened, specially hardened steel, nickel-plated) for stainless steel pipes $1-1\frac{1}{2}$ ", 2-6" and 8-12". Grooving rollers for aluminium, PVC pipes on request.

Material support

Extra sturdy REMS Herkules XL 12" material support for roll grooving of pipes up to 12" (page 107).

German Quality Product



Supply format

REMS Collum. Roll grooving attachment for grooving pipes of pipe coupling systems DN 25–300, 1–12". Roll grooving attachment, hydraulic hand pump, built-in ring gauge for automatic groove-depth-stop, 1 pair of groove rollers (pressure roller, counter-pressure roller) 2-6", Allen key. Choice of 3 drive units, with maintenance-free gear, powerful universal motor, safety switch. For workbench, stand or wheel stand. In a carton.

	otalia or miloot otaliar iii a oartoiii		
Description	Version	ArtNo.	€
Collum	Universal motor 230 V, 50 – 60 Hz, 1200 W, overload protection. 29 min ⁻¹	347006 R220	2.761,08
Collum 2	Universal motor 230 V, 50 – 60 Hz, 1700 W. 28 min ⁻¹	347008R220	3.093,24
Collum 2 Compact	Universal motor 230 V, 50 – 60 Hz, 1200 W, overload protection. 26 min ⁻¹	347009 R220	3.093,24

Accessories

Other voltages on request.

Description	ArtNo.	€
Stand	849315R	216,94
Wheel stand	849310R	351,88
Foot switch with coupling	347010R220	249,12
REMS Herkules material supports, see page	107.	

Grooving rollers and other accessories, see page 48.



Powerful, mobile, cordless roll grooving machine for fast, economical grooving of pipes for pipe coupling systems. For installation, sprinkler lines, commercial heating, industry and mining. For job site and workshop. Li-lon 22V Technology. For battery and corded operation.

Steel pipes

ON 25-300 "1-12

s ≤ 7.2 mm

Stainless steel pipes, copper, aluminium, PVC pipes

REMS Collum 22V – electrical roll grooving up to 12". Mobile, fast, economical. Feed of the pressure roller with oil-hydraulic pressure cylinder. Li-Ion 21.6V, 9.0 Ah battery, for approx. 23 DN 100/4" grooves with one battery charge*.

Design

Compact, robust, building site-compatible, mobile. Convenient dimensions, comfortable weight, cordless roll grooving machine with drive unit just 34 kg. Practical D-shaped handle with soft grip. Machine status check with overload protection of the drive unit against too high currents, with overheating protection by motor temperature monitoring (NTC), with electronic battery charging status check by a 2-coloured green/red LED. For work bench. Stand or wheel stand as an accessory, for easy transport, optimum working height and stable positioning.

Drive

Powerful and fast, e.g. roll grooving of 4" steel pipe in just 77 s. Solid, maintenance-free gear. Powerful battery motor 21.6 V, with high power reserve, $500\,\mathrm{W}$ output, for intensive use with large dimensions. High grooving speed $27-20\,\mathrm{rpm}$. Safety tip switch.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V batteries with 9.0 Ah capacity for long service life. Light and powerful, for approx. 23 DN 100/4" grooves with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range -10 to $+60\,^{\circ}\text{C}$. No memory effect for maximum battery power. Rapid charger $100-240V,\,90\,\text{W}$. Rapid charger $100-240V,\,290\,\text{W}$, for shorter charging times, as accessory. Voltage supply $220-240V/21.6V,\,40\,\text{A}$ output, for mains operation instead of Li-lon battery $21.6\,\text{V}$, as accessory.

Roll grooving attachment

Compact, job site-proven. Robust metal housing for tough use. Handy, easy to transport, only 26 kg. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller. Pressure build-up with hydraulic hand pump. Built-in ring gauge for automatic groove-depth-stop.

Grooving rollers

The proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and precise grooving. Grooving rollers machined from hardened special steel ensure extremely long service life. 3 pairs of groove rollers (pressure roller, counter-pressure roller) for the whole working range DN 25–300, 1–12", easy change. Grooving rollers Cu (pressure roller, counterpressure roller) for copper pipe 54–159 mm. Groove rollers INOX (pressure roller made of stainless steel, counter-pressure roller made of toughened, specially hardened steel, nickel-plated) for stainless steel pipes $1-1\frac{1}{2}$ ", 2-6" and 8-12". Grooving rollers for aluminium, PVC pipes on request.

Material support

Extra sturdy REMS Herkules XL 12" material support for roll grooving of pipes up to 12" (page 107).



German Quality Product









Stand (Accessory)

Herkules XL 12" (Accessory)

Supply format

REMS Collum 22V. Cordless roll grooving machine for grooving pipes for DN 25–300, 1–12" pipe coupling systems. Roll grooving attachment, hydraulic hand pump, built-in ring gauge for automatic groove-depth-stop, 1 pair of groove rollers (pressure roller, counter-pressure roller) 2–6", Allen key. Drive unit with maintenance-free gear, powerful battery motor 21.6V, 500 W. Safety switch. Right and left-hand rotation, machine status check with overload protection, temperature monitoring, battery charging status check. Universal support. Li-lon 21.6V, 9.0 Ah battery, 100–240V, 50–60 Hz, 90 W rapid charger. For workbench, stand or wheel stand. In a carton.

		 		 	 _	 	
€	ArtNo.						
3.736,80	347005 R220						

Other voltages on request.



Description	ArtNo.	€
REMS Amigo 22 V drive unit,		
without battery	530004R22	1.162,56
Battery Li-Ion 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585 R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 40 A,		
for mains operation instead of battery Li-lon 21.6V	571578 R220	517,96
Stand	849315R	216,94
Wheel stand	849310R	351,88
REMS Herkules material supports, see page 107.		
Grooving rollers and other accessories, see page 48.		
REMS Lumen 2800 22V, cordless LED flood light, see	page 111	



Robust, compact high performance machine with roll grooving attachment for pipe grooving of pipe coupling systems. For installation, sprinkler lines, commercial heating lines, industry and mining.

For job site and workshop.

Steel pipes

DN 25-300 1-12"

s ≤ 7.2 mm

Stainless steel pipes, copper, aluminium, PVC nines

Pipe threads $\frac{1}{16}$ – 2", $\frac{16}{63}$ mm, bolt threads $\frac{6}{60}$ mm, $\frac{1}{4}$ – 2", with conversion kit.

REMS Magnum RG – the compact up to 12". Immensely powerful and extremely fast. Feed of the pressure roller with oil-hydraulic pressure cylinder.

Desian

Robust, compact, job site-proven design. Favorable size and weight, e.g. REMS Magnum 2000 RG-T only 68 kg. Tool support. For workbench. Stand, collapsible wheel stand or wheel stand with material shelf, as an accessory, for easy transport, optimum working height and stable positioning.

Drive

Immensely powerful and fast, e.g. roll grooving of 6" steel pipe with REMS Magnum 2010 RG-T in just 40 s. Completely maintenance-free gear which runs in a sealed oil bath. Choice of 3 powerful motors (see REMS Magnum page 34). Operator-friendly safety foot switch with emergency-stop, 2-step, can be loaded with the full body weight during operation.

Roll grooving attachment

Compact, job site-proven. Robust metal housing for tough use. Handy, easy to transport, only 26 kg. Oil hydraulic pressure cylinder for powerful in-feed of pressure roller. Pressure build-up with hydraulic hand pump. Built-in ring gauge for automatic groove-depth-stop.

Grooving rollers

The proven REMS grooving rollers with perfectly size-adjusted pressure rollers and counterpressure rollers with well gripping axial knurls guarantee a secure rotation of the pipe and precise grooving. Grooving rollers machined from hardened special steel ensure extremely long service life. 3 pairs of groove rollers (pressure roller, counter-pressure roller) for the whole working range DN 25–300, 1–12", easy change. Grooving rollers Cu (pressure roller, counterpressure roller) for copper pipe 54–159 mm. Groove rollers INOX (pressure roller made of stainless steel, counter-pressure roller made of toughened, specially hardened steel, nickel-plated) for stainless steel pipes $1-1\frac{1}{2}$ ", 2-6" and 8-12". Grooving rollers for aluminium, PVC pipes on request.

Conversion kit for threading

Tool set 1/4 - 2" complete with universal automatic die head, dies for pipe threads, tapered, ISO 7-1 (DIN 2999, BSPT) R 1/2 - 3/4 and R 1 - 2" right-hand, pipe cutter, inner pipe deburrer, pressing lever, pump for automatic oiling, oil basin, chip tray.

Material support

Extra sturdy REMS Herkules XL 12" material support for roll grooving of pipes up to 12" (page 107).



German Quality Product









Supply format

REMS Magnum RG. Roll grooving machine for pipe grooving of pipe coupling systems DN 25–300, 1–12". With maintenance-free gear, safety foot switch with emergency-stop, self-tightening quick-action hammer chuck, rear centering device, automatic lubrication and cooling, tool support. Choice of 3 motors. Roll grooving attachment, hydraulic hand pump, built-in ring gauge with automatic groove-depth-stop, 1 set of grooving rollers (pressure roller, counterpressure roller) 2-6", hexagon key. For workbench, stand, collapsible wheel stand or wheel stand with material shelf. In a carton.

Description	Version	ArtNo.	€
2000 RG-T	Universal motor 230 V or 110 V, 50 – 60 Hz, 1700 W. 53 rpm.	340230 R220	5.646,72
2010 RG-T	Pole-reversible capacitor motor 230 V, 50 Hz, 2100 W. 52/26 rpm, also under full load. Extremely quiet running.	340231 R220	5.999,64
2020 RG-T	Pole-reversible 3~ induction motor 400 V, 50 Hz, 2000 W. 52/26 rpm, also under full load. Extremely quiet running.	340232R380	6.279,90

Other voltages on request.



Accessories


for threading.	340110RR	1.453,20
Conversion kit Magnum RG-T to L-T		
Grooving rollers and other accessories, see page 48.		
REMS Herkules material supports, see page 107.		
Collapsible wheel stand	344150 R	705,84
Wheel stand with material support	344100 R	493,05
Stand	344105R	290,64
Description	ArtNo.	€





Sawing

D-C	Universal electric reciprocating saws	58
	Cordless universal reciprocating saw	60
-	Electric reciprocating pipe saws	62
	Pneumatic reciprocating pipe saw	64
	Cordless pipe reciprocating saw	66
REMS (III)	Saw blades for reciprocating saws	68
	Circular pipe sawing machine	70
	Universal circular metal sawing machine	71

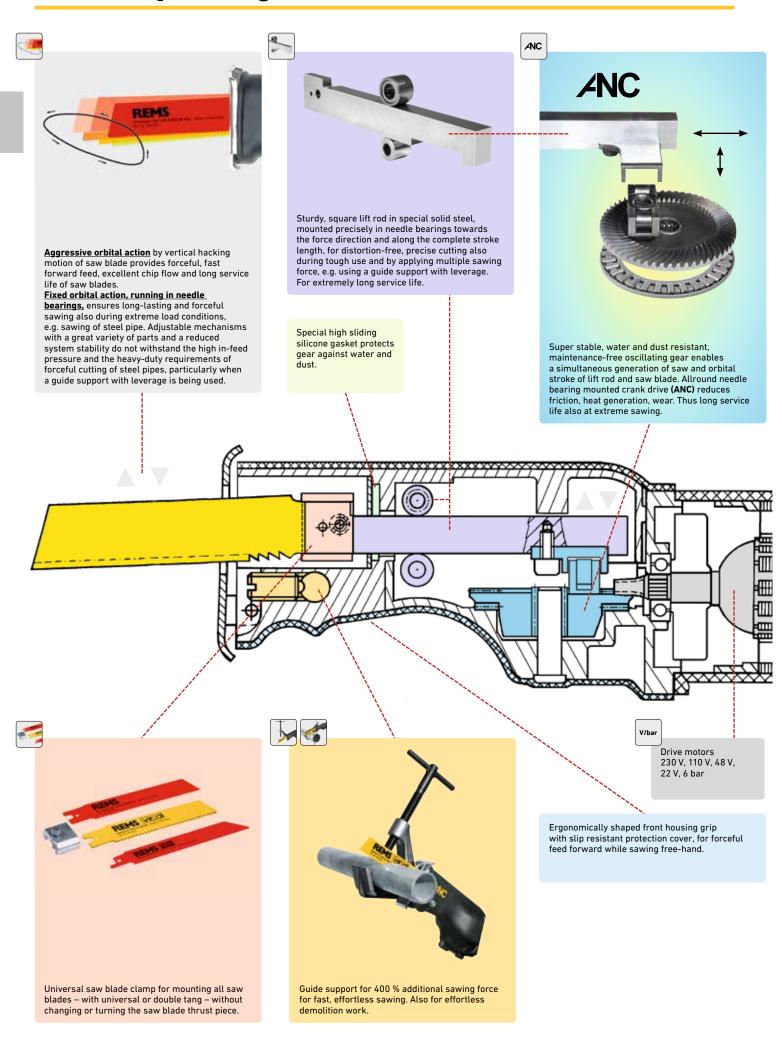



Vario-Electronic

Electronic stepless speed control of drive unit for sensitive start-sawing and for stroke selection during sawing according to the material. The stroke speed is controlled continuously by variable pressure on the touch switch from 0 to 2,800 rpm (REMS Puma VE), 0 to 2,400 rpm (REMS Cat VE, REMS Tiger VE) or 0 to 1,900 rpm (REMS Cat 22V VE, REMS Tiger 22V VE) (accelerator switch).



Ideal speed

Deliberately fixed speed. Therefore optimum cutting speed for maximum protection of motor and gear and maximum service life of saw blades. The ideal cutting speed of 2,400 rpm has been determined by extensive sawing tests with steel pipe which lead to optimum performance in combination with the aggressive, fixed orbital action, guide support and REMS special saw blade.



Power-transferring guide support

400% more sawing power for effortless, ultra-fast sawing of pipes and profiles, e.g., 2" steel pipe in just 8 s. For assembly and disassembly. Guide support with 5-fold power-transferring leverage allows effortless, fast, right-angled sawing everywhere on site, also free-hand without a pipe vice. Ideal handling, very quick and easy operation, only one handle for clamping and sawing. No free-swinging chain. No danger of jamming by limitation of swing angle. Straight machine handle for optimum forward feed.



Power-transferring chain guide support 6"

400% more sawing power for effortless, ultra-fast sawing of Ø % – 6" pipes and other profiles, e.g., 2" steel pipe in just 8 s. For assembly and disassembly. Guide support with 5-fold power-transferring leverage allows effortless, fast, right-angled sawing everywhere on site, even in very confined spaces. Clamping chain with strong chain links, easy clamping by quick closure and threaded spindle. Straight machine handle for optimum forward feed.



Speed-Regulation

Stepless electronic speed control of drive unit for selecting the speed according to the material. Ideal for sawing stainless steel pipe, cast pipe and for sawing boilers, tanks, bath tubs etc. The speed is continuously adjustable between 700 and 2,200 rpm on the dial. The electronic speed control which is being used keeps the selected speed constant, also under load, including speed generator, control electronics, residual current limitation for sensitive start-sawing, motor temperature control of field wires with PTC resistance (Positive Temperature Coefficient) and stall protection of gear and motor.



Weiaht

High sawing efficiency at low weight by innovative, proven technology and perfect tuning of all components. For effortless, fatique-free sawing and easy handling.



Power

All power data stated to be understood as the rated power input. The drive motors of REMS reciprocating saws have a very high efficiency of approx. 65% thanks to an outstanding technology and quality. Therefore the user has a high power output available which is useful particularly for sawing difficult-to-cut materials, e.g. steel pipe. High power output can only be used fully by levered sawing, e.g. with the REMS guide support.



Drive Motors

Depending on model universal motors of voltages of 230 V, 110 V, 48 V, battery motors 22 V or pneumatic motors for 6 bar operating pressures are used. All drive motors are extremely powerful, fulfill highest quality demands and come with large power reserves, for long service life.



Saw blade holder with quick-change system

Practical saw blade holder with quick-change system for fast saw blade changing without tools. For holding single tang saw blades.



Continuously adjustable support shoe

Swivel support shoe for safe guiding of the saw on the material to be sawn. Support shoe continuously adjustable in longitudinal direction by 40 mm for better utilisation of partially blunted saw blades and for setting the plunge-in depth of the saw blade in the material.



Anti-vibration system

Special drive technology with mass compensation and vibration damping handles. For low vibration, effortless sawing.



Saw blade can be inserted turned 180°.

Saw blade can be inserted with the teeth facing down or turned 180° facing up for cuts in confined spaces with difficult access.

Powerful power tool for universal free-hand sawing. Only 3.8 kg. Ideal for assembly, disassembly, repair.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

REMS Puma VE – the powerful universal saw with anti-vibration system. Quick saw blade change without tools. Adjustable support shoe.

Universal use

Can be used anywhere, free hand, over head, in tight corners, flush with the wall. Extremely versatile and powerful. For all sawing work on the building site and for rescue and emergency operations. Also for plunge-cut sawing.

Design

Powerful, suitable for building sites. Handy, easy grip shape. Only 3.8 kg. Ergonomically designed front housing grip with non-slip, heat insulating protective jacket with soft grip, for powerful sawing thrust. Practical D-shaped handle with vibration damping soft grip. Drive rod runs in an enclosed drive housing for safe work. Large saw blade stroke, 30 mm, for better cut clearance. Fast stroke speed up to 2,800 rpm for fast sawing thrust and effective sawing. Robust crank drive, maintenance-free. High sliding special seal. Powerful, high capacity universal motor with large power reserve, 1,300 W, safety switch. 4 m long connecting lead. Safety switch.

Anti-vibration system

Special drive technology with mass compensation and vibration damping handles. For low vibration, effortless sawing.

Vario-Electronic

Continuous electronic stroke speed control for gentle start of sawing and selection of a stroke speed suitable for the material. The stroke speed can be continuously controlled by variable pressure on the safety switch from 0 to 2,800 rpm (accelerator switch).

Saw blade holder with quick-change system


Practical saw blade holder with quick-change system for fast saw blade changing without tools. For holding single tang saw blades. Saw blade can be inserted with the teeth facing down or turned 180° facing up for cuts in confined spaces with difficult access.

REMS saw blades


Full range of REMS saw blades for free-hand sawing of different materials (page 69).

Continuously adjustable support shoe

Swivel support shoe for safe guiding of the saw on the material to be sawn. Support shoe continuously adjustable in longitudinal direction by 40 mm for better utilisation of partially blunted saw blades and for setting the plunge-in depth of the saw blade in the material. For economical working.

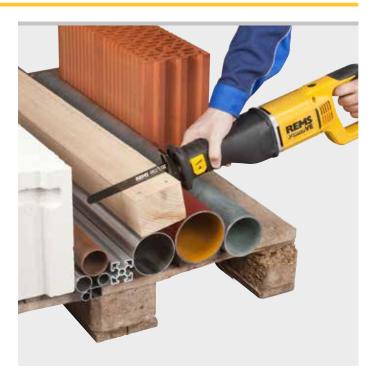











Supply format

REMS Puma VE Set. Electric universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing, with anti-vibration system. Drive machine with D-shaped handle with soft grip, maintenance-free crank drive, powerful 230 V, 50 – 60 Hz, 1,300 W universal motor, safety switch, connecting cable 4 m. Continuous electronic stroke speed control (accelerator switch) 0 to 2,800 rpm. 30 mm stroke. Saw blade holder with quick-change system Adjustable support shoe. Hexagon key, 1 REMS saw blade 210-1,8/2,5 in sturdy steel case.

key. I REMS saw blade 210-1.8/2.5. In sturdy steel case.		
	ArtNo.	€
	560023R220	369,53

Other voltages on request.

Description	ArtNo.	€
REMS Puma VE drive unit	560003R220	331,12
REMS saw blades see page 69.		
Steel case	566051R	82,73









Powerful, robust, handy power tool for universal free-hand sawing. Only 3.0 kg. Ideal for assembly, dismantling, repair.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

Especially also for steel pipes

REMS Cat VE – saws anything, anywhere. Extremely versatile and powerful. Robust and handy.

Universal use

Ready for use anywhere, free-hand, overhead, in confined areas, flush to wall. Extremely versatile and efficient. Especially also for sawing metal pipes, sawing up boilers, tanks, bath tubs. For rescue and emergency operations. Also for plunge-cut sawing.

Desian

Robust, job site-proven. Slender, handy design. Super light, only 3.0 kg. Ergonomically shaped front housing grip with slip resistant, heat insulating protection cover with soft grip, for forceful feed forward. Proven D-shaped handle. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful universal motor with ample reserve capacity, 1050 W. Safety tip switch.

Sturdy, square lift rod

In special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use. For extremely long service life. Drive rod runs in an enclosed housing for safe work.

Oscillating drive with ANC

Super stable, water and dust resistant, maintenance-free oscillating drive for simultaneous generation of sawing stroke and orbital action of lift rod and saw blade. Allround needle bearing mounted crank drive (ANC) reduces friction, heat generation, wear. For long service life of drive also at extreme sawing.

Aggressive orbital action

Agressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades. Fixed orbital action, running in needle bearings, ensures long-lasting and forceful sawing also during extreme load conditions, e.g. sawing of steel pipe.

Vario-Electronic

Electronic stepless speed control of drive unit for sensitive start sawing and for speed selection during sawing. The speed is controlled by pressing the tip switch steplessly from 0 to 2,400 rpm (acceleration switch).

Universal saw blade clamp

All saw blades — with universal or double tang — can be clamped without changing or turning the saw blade thrust piece.

REMS universal saw blade

Only 1 REMS universal saw blade (page 68) for all sawing work instead of many different saw blades. Double tang for free-hand sawing and sawing with guide holder.

REMS saw blades

Full range of REMS saw blades for free-hand sawing of different materials (page 69).

reduced friction and wear substantially reduced heat generation for extremely long service life, also during tough use





German Quality Product







Supply format

REMS Cat VE Set. Electric universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing. Drive unit with D-shaped handle, maintenance-free, water and dust resistant oscillating drive with altround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50-60 Hz, 1050 W, safety tip switch. Electronic stepless speed control (acceleration switch) 0 to 2,400 rpm. Universal saw blade clamp. Hexagon key. 1 REMS universal saw blade 150-1.8/2.5. In sturdy steel case.

€	ArtNo.	
580,24	560040R220	

Other voltages on request.

Accessories

Description	ArtNo.	€
REMS Cat VE drive unit	560004R220	580,24
REMS saw blades see page 68 – 69.		
Steel case	566005R	82,73

REMS



Powerful, mobile, handy power tool for universal free-hand sawing. Only 3.1 kg. Ideal for assembly, dismantling, repair. Li-Ion 22 V Technology. For battery and corded operation.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

Especially also for steel pipes

REMS Cat 22 V VE – saws anything, anywhere. Mobile, handy, light. Li-Ion 21.6 V, 5.0 Ah battery, for approx. 75 1" steel pipe cuts with one battery charge*.

Universal use

Ready for use anywhere, free-hand, overhead, in confined areas, flush to wall. Mains independent. Extremely versatile and efficient, particularly for metal. Saws metal pipes, boilers, tanks, bath tubs, window frames, etc., for rescue and disaster service operations. Also for plunge-cut sawing.

Design

Robust, job site-proven. Mobile, handy, light. Drive unit with battery pack weighs only 3.1 kg. Slim form. Ergonomically shaped front housing grip with slip resistant, heat insulating protection cover with soft grip, for forceful feed forward. Practical D-shaped handle with soft grip. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful 21.6 V battery motor with ample reserve capacity, 500 W output. Safety tip switch. Machine status check with overload protection of the drive unit against too high currents, with overheating protection by motor temperature monitoring (NTC), with electronic battery charging status check with charging level indication by a 2-coloured green/red LED.

Sturdy, square lift rod

In special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use. For extremely long service life.

Oscillating drive with ANC

Super stable, water and dust resistant, maintenance-free oscillating drive for simultaneous generation of sawing stroke and orbital action of lift rod and saw blade. Allround needle bearing mounted crank drive (ANC) reduces friction, heat generation, wear. For long service life of drive also at extreme sawing.

Vario-Electronic

Electronic stepless speed control of drive unit for sensitive start sawing and for speed selection during sawing. The speed is controlled by pressing the tip switch steplessly from 0 to 1,900 rpm (acceleration switch).

Aggressive orbital action

Aggressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades. Fixed orbital action, running in needle bearings, ensures long-lasting and forceful sawing also during extreme load conditions, e.g. sawing of steel pipe.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6V, 4.4Ah battery, for approx. 66 1" steel pipe cuts, 5.0 Ah battery, for approx. 75 1" steel pipe cuts, 9.0 Ah for approx. 140 1" steel pipe cuts with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220 – 240 V/21.6 V, 40 A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.

Universal saw blade clamp


All saw blades – with universal or double tang – can be clamped without changing or turning the saw blade thrust piece.

REMS universal saw blade

Only 1 REMS universal saw blade (page 68) for all sawing work instead of many different saw blades. Double tang for free-hand sawing and sawing with guide holder.

REMS saw blades

Full range of REMS saw blades for free-hand sawing of different materials (page 69).

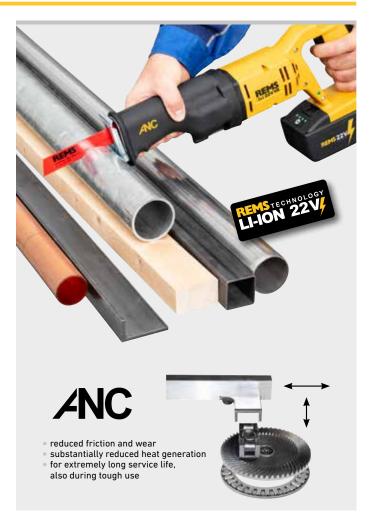









Supply format

REMS Cat 22 V VE Set. Battery driven universal reciprocating saw with Vario-Electronic (VE) for free-hand sawing. Drive unit with D-shaped handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful 21.6 V battery motor, safety tip switch. Electronic stepless speed control (acceleration switch) 0 to 1,900 rpm. Machine status check with overload protection, temperature monitoring, battery charging status check. Li-lon 21.6 V, 5.0 Ah battery, $100-240\,\text{V},\,50-60\,\text{Hz},\,90\,\text{W}$ rapid charger. Universal saw blade clamp. Hexagon key. 1 pcs REMS universal saw blade 150-1.8/2.5. In sturdy steel case.

	· · · · · · · · ·	-,.
€	ArtNo.	
1.230,03	560052R220	

Other voltages on request.

ArtNo.	€
560010R22	704,80
571574R22	372,64
571581 R22	310,36
571583R22	414,16
571585R220	175,42
571587 R220	414,16
571578R220	517,96
566030R	128,71
	560010R22 571574R22 571581R22 571583R22 571585R220 571587R220



Powerful, robust, handy power tool with force-transmitting guide holder for effortless, fast, right-angled sawing everywhere on site, without a vice. Also for universal free-hand sawing. Only 3.0 kg. Ideal for assembly, dismantling, repair.

Ideal for steel pipes and others.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

For materials that are difficult to cut, e.g. stainless steel pipes, hard cast iron, use the REMS Tiger SR with electronic stroke speed control.

REMS Tiger – the saw for the pipe fitter. Saws effortless, fast, right angle. Robust and handy.

Power-transferring guide support

400 % more sawing power for effortless, ultra-fast sawing of pipes and profiles, e.g., 2" steel pipe in just 8 s. For assembly and disassembly. Guide support with 5-fold power-transferring leverage allows effortless, fast, right-angled sawing everywhere on site, also free-hand without a pipe vice. Ideal handling, very quick and easy operation, only one handle for clamping and sawing. No free-swinging chain. No danger of jamming by limitation of swing angle. For optimum in-feed with guide support a straight machine handle is advantageous.

Power-transferring chain guide support 6"

400 % more sawing power for effortless, ultra-fast sawing of Ø % – 6" pipes and other profiles, e.g., 2" steel pipe in just 8 s. For assembly and disassembly. Guide support with 5-fold power-transferring leverage allows effortless, fast, right-angled sawing everywhere on site, even in very confined spaces. Clamping with strong chain links, easy clamping by quick closure and threaded spindle. For optimum in-feed with guide support a straight machine handle is advantageous.

Right angle sawing

Right angle cut thanks to REMS guide support and REMS special saw blade. Essential for subsequent operations in pipe installation.

REMS special saw blade

REMS special saw blade (page 68), extra thick, rigid and unbendable, double tang, absolutely essential for right-angled sawing and fast disassembly of steel pipes with force-transmitting guide holder.

REMS universal saw blade

Only 1 REMS universal saw blade (page 68) for all sawing work instead of many different saw blades. Double tang for free-hand sawing and sawing with guide holder.

REMS saw blades

Full range of REMS saw blades for free-hand sawing of different materials (page 69).

Universal saw blade clamp

All saw blades – with universal or double tang – can be clamped without changing or turning the saw blade thrust piece.

Design

Robust, job site-proven. Slender, handy design. Super light, only 3.0 kg. Can be used anywhere. Ergonomically shaped front housing grip with slip resistant protection cover for forceful feed forward during free-hand sawing. Choice of practical D-shaped handle, advantegeous during free-hand sawing, or straight machine handle, advantegeous during sawing with guide support. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful universal motor with ample reserve capacity, 1050 W respectively 1400 W (REMS Tiger SR). Safety tip switch. Choice of drive unit with fixed, ideal speed, electronic speed control (Vario-Electronic) or electronic speed regulation. Overload protection (REMS Tiger) protects motor, gear and saw blade. The electronic tachometer speed controller (REMS Tiger SR) used for control keeps the preselected number of strokes constant even under load and includes tachogenerator, electronic control, start-up current limiter for soft start-up, overheating protection by temperature monitoring of the field winding of the motor with PTC resistance (Positive Temperature Coefficient) and blocking protection for gearbox and motor.

Sturdy, square lift rod


In special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use. For extremely long service life. Drive rod runs in an enclosed housing for safe work.

Oscillating drive with ANC

Super stable, water and dust resistant, maintenance-free oscillating drive for simultaneous generation of sawing stroke and orbital action of lift rod and saw blade. Allround needle bearing mounted crank drive (ANC) reduces friction, heat generation, wear. For long service life of drive also at extreme sawing.

Aggressive orbital action

Aggressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades. Fixed orbital action, running in needle bearings, ensures long-lasting and forceful

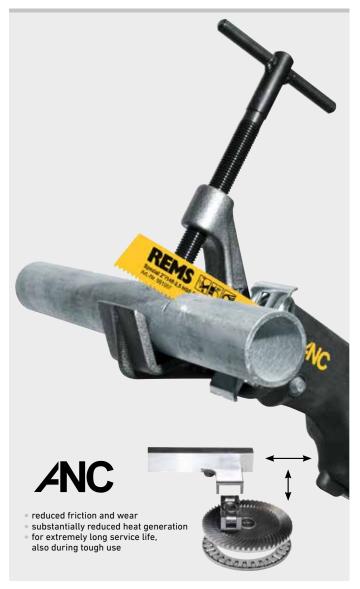

German Quality Product







sawing also during extreme load conditions, e.g. sawing of steel pipe. Adjustable mechanisms with a great variety of parts and a reduced system stability do not withstand the high feed forward pressure and the heavy-duty requirements of forceful cutting of steel pipes, particularly when a guide support with leverage is being used.

Ideal speed (REMS Tiger)

Deliberately fixed speed. Therefore optimum cutting speed for maximum protection of motor and gear and maximum service life of saw blades. The ideal cutting speed of 2,400 rpm has been determined by extensive sawing tests with steel pipe which lead to optimum performance in combination with the aggressive, fixed orbital action, guide support and REMS special saw blade.

Vario-Electronic (REMS Tiger VE)

Electronic stepless speed control of drive unit for sensitive start-sawing and for speed selection during sawing according to the material. Also for plunge-cut sawing. The stroke speed can be continuously controlled by variable pressure on the safety switch from 0 to 2,400 rpm (accelerator switch).

Speed Regulation (REMS Tiger SR)

Stepless electronic speed control of drive unit for selecting the stroke according to the material. Ideal for sawing stainless steel pipe, cast pipe and for sawing boilers, tanks, bath tubs etc. Also for plunge-cut sawing. The number of strokes is steplessly adjustable on the dial from 700 to 2,200 rpm.







Supply format

REMS Tiger Set. Electric reciprocating pipe saw for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with straight machine handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50–60 Hz, 1050 W, safety tip switch. Fixed stroke 2,400 rpm. Overload protection. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3.2. In sturdy steel case.

€	ArtNo.	
725.56	560020 R220	

Other voltages, also 48 V on request.



REMS Tiger VE Set. Electric reciprocating pipe saw with Vario-Electronic for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with D-shape handle, maintenance-free, water and dust resistant oscillating drive with altround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50–60 Hz, 1050 W, safety tip switch. Electronic stepless speed control (acceleration switch) to 2,400 rpm. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3.2. In sturdy steel case.

pes. NEMS special saw blades 2 / 140 S.Z. III starty s	icci casc.	
	ArtNo.	€
	560027R220	746.32

Other voltages on request.

3.0 kg 1050 W 230 V VE ANC

Supply format

REMS Tiger SR Set. Electric reciprocating pipe saw with speed regulation (SR) for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with straight machine handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful universal motor 230 V or 110 V, 50–60 Hz, 1400 W, safety tip switch. Stepless electronic speed control 700 to 2,200 rpm with sensitive start-sawing, speed generator, temperature control and stall protection. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3.2. In sturdy steel case.

	operation stands 2 / 110 old in other dy other sace.	- 1
€	ArtNo.	
818,98	560026R220	

Other voltages on request.



Accessories

Description	ArtNo.	€
REMS Tiger drive unit	560000R220	621,76
REMS Tiger VE drive unit	560008R220	642,52
REMS Tiger ANC SR drive unit	560001 R220	715,18
REMS saw blades see page 68-69.		
Guide support 2", for pipes Ø 1/8 − 2"	563000R	165,04
Guide support 4", for pipes Ø 2½-4"	563100R	227,32
Guide support 6", for pipes Ø 5-6"	563200R	258,46
Chain guide support 6", for Ø $\frac{1}{18}$ – 6" pipes and other profiles	563203R	205,52
Dual purpose holder for sawing and threading, with REMS Tiger and REMS Amigo E, Amigo, Amigo 2	543100	264,69
Protective cap for guide support 2", 4" and 6", for clamping of thin-walled material	563008R	20,14
Steel case	566051R	82,73



Powerful, robust, handy compressed air tool with force-transmitting guide holder for effortless, fast, right-angled sawing everywhere on site, without a vice. Also for universal free-hand sawing. Ideal for use in dangerous, e.g. in wet environment. For assembly, dismantling, repair.

Ideal for steel pipes and others.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

For materials that are difficult to cut, e.g. stainless steel pipes, hard cast iron, use the REMS Tiger SR with electronic stroke speed control.

REMS Tiger pneumatic – for sawing in dangerous environment.

Saws effortless, fast, right-angle. Force transmitting guide support for 400 % more sawing power. Sturdy, square lift rod. Oscillating drive with ANC.

Aggressive orbital action for fast feed forward sawing and long service life of saw blades. Universal saw blade clamp.

Design

Robust, job site-proven. Slender, handy design. Super light, only 3.8 kg. Can be used anywhere. Ergonomically shaped front housing grip with slip resistant, heat insulating protection cover with soft grip, for forceful feed forward during free-hand sawing. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful pneumatic motor with ample reserve capacity, 1000 W. Stroke speed control (accelerator switch) 0 to 1,700 rpm. Operating pressure 6 bar, air consumption ≤ 1.6 m³/min. Safety switch with lock.

Additional description see REMS Tiger, page 62-63.







German Quality Product



Supply format

REMS Tiger pneumatic Set. Pneumatic reciprocating pipe saw for effortless, fast, right angle sawing with guide support and for free-hand sawing. Drive unit with straight machine handle, maintenance-free, water and dust resistant oscillating drive with allround needle bearing mounted crank drive (ANC), aggressive orbital action, powerful pneumatic 1000 W, operating pressure 6 bar, safety switch with lock. Stroke speed control (accelerator switch) 0 to 1,700 rpm. Air inlet hose, air outlet hose. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3.2. In sturdy steel case.

€	ArtNo.	
2.176,69	560022	

Description	ArtNo.	€
REMS saw blades see page 68-69.		
REMS Tiger pneumatic drive unit	560002R	1.865,29
Guide support 2", for pipes Ø 1/8 - 2"	563000R	165,04
Guide support 4", for pipes Ø 2½ - 4"	563100R	227,32
Guide support 6", for pipes Ø 5-6"	563200R	258,46
Chain guide support 6", for Ø $\frac{1}{6}$ – 6" pipes and other profiles	563203R	205,52
Dual purpose holder for sawing and threading, with REMS Tiger and REMS Amigo E, Amigo, Amigo 2	543100	264,69
Protective cap for guide support 2", 4" and 6", for clamping of thin-walled material	563008R	20,14
Steel case	566051R	82,73





Powerful, mobile, handy power tool with force-transmitting guide holder for effortless, fast, right-angled sawing everywhere on site, without a vice. Also for universal free-hand sawing. Only 3.4 kg. Ideal for assembly, dismantling, repair. Li-Ion 22 V Technology. For battery and corded operation.

Ideal for steel pipes and others.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

REMS Tiger 22 V VE – the saw for the pipe fitter. Saws effortless, fast, right angle. Mobile, handy, light. Li-Ion 21.6 V, 9.0 Ah battery, for approx. 80 1" steel pipe cuts with guide holder for approx. 140 1" steel pipe cuts without guide holder with one battery charge*.

Power-transferring guide support

400% more sawing power for effortless, ultra-fast sawing of pipes and profiles, e.g., 2" steel pipe in just 8 s. For assembly and disassembly. Guide support with 5-fold power-transferring leverage allows effortless, fast, right-angled sawing everywhere on site, also free-hand without a pipe vice. Ideal handling, very quick and easy operation, only one handle for clamping and sawing. No free-swinging chain. No danger of jamming by limitation of swing angle. For optimum in-feed with guide support a straight machine handle is advantageous.

Right angle sawing

Right angle cut thanks to REMS guide support and REMS special saw blade. Essential for subsequent operations in pipe installation.

REMS special saw blade

REMS special saw blade (page 68), extra thick, rigid and unbendable, double tang, absolutely essential for right-angled sawing and fast disassembly of steel pipes with force-transmitting guide holder.

REMS universal saw blade

Only 1 REMS universal saw blade (page 68) for all sawing work instead of many different saw blades. Double tang for free-hand sawing and sawing with quide holder.

REMS saw blades

Full range of REMS saw blades for free-hand sawing of different materials (page 69).

Universal saw blade clamp

All saw blades – with universal or double tang – can be clamped without changing or turning the saw blade thrust piece.

Design

Robust, job site-proven. Mobile, handy, light. Drive unit with battery pack weighs only 3.4 kg. Slim form. Can be used anywhere. Ergonomically shaped front housing grip with slip resistant protection cover for forceful feed forward during free-hand sawing. Practical D-shaped handle with soft grip. Swivel support shoe for safe guiding of the saw on the material to be sawn. High sliding silicone gasket protects gear against water and dust. Powerful 21.6 V battery motor with ample reserve capacity, 500 W output. Safety tip switch. Machine status check with overload protection of the drive unit against too high currents, with overheating protection by motor temperature monitoring (NTC), with electronic battery charging status check with charging level indication by a 2-coloured green/red LED.

Sturdy, square lift rod

In special solid steel, mounted precisely in needle bearings towards the force direction and along the complete stroke length, for distortion-free, precise cutting also during tough use. For extremely long service life. Drive rod runs in an enclosed housing for safe work.

Oscillating drive with ANC

Super stable, water and dust resistant, maintenance-free oscillating drive for simultaneous generation of sawing stroke and orbital action of lift rod and saw blade. Allround needle bearing mounted crank drive (ANC) reduces friction, heat generation, wear. For long service life of drive also at extreme sawing.

Vario-Electronic

Electronic stepless speed control of drive unit for sensitive start sawing and for speed selection during sawing. The speed is controlled by pressing the tip switch steplessly from 0 to 1,900 rpm (acceleration switch).

Aggressive orbital action

Aggressive orbital action by vertical hacking motion of saw blade provides forceful, fast forward feed, excellent chip flow and long service life of saw blades. Fixed orbital action, running in needle bearings, ensures long-lasting and forceful sawing also during extreme load conditions, e.g. sawing of steel pipe.



German Quality Product





Battery or mains operation

Li-lon 22 V Technology. Highly resistant Li-lon 21.6 V battery with 9.0 Ah capacity, for long service life. Light and powerful, for approx. 80 1" steel pipe cuts with guide holder or approx. 135 1" steel pipe cuts without guide holder with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240 V, 90 W. Rapid charger 100–240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220–240 V/21.6 V, 40 A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.

Universal saw blade clamp

All saw blades – with universal or double tang – can be clamped without changing or turning the saw blade thrust piece.

Supply format

REMS Tiger 22 V VE Set. Cordless pipe reciprocating saw with Vario Electronics (VE) for effortless, fast, right-angled sawing with guide holder and for free-hand sawing. Drive unit with spade handle, maintenance-free, water and dust proof oscillation drive with all-round needle bearing crank drive (ANC), aggressive orbital stroke, powerful 21.6 V, 500 W battery motor, safety switch. Continuous, electronic stroke speed control (accelerator switch) 0 to 1900 rpm. Machine status check with overload protection, temperature monitoring, battery charging status check. Li-lon 21.6 V, 9.0 Ah battery, 100–240 V, 50–60 Hz, 90 W rapid charger. Universal saw blade clamp. Hexagon key. Guide support 2". 2 pcs. REMS special saw blades 2"/140-3.2. In sturdy steel case.

ArtNo.	€
560053R220	1.347,32

Other voltages on request.



Description	ArtNo.	€
REMS Tiger 22 V VE drive unit, without battery	560011 R22	808,60
REMS saw blades see page 68-69.		
Guide support 2", for pipes Ø 1/8 – 2"	563000R	165,04
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 40 A, for mains operation instead of battery Li-lon 21.6 V	571578R220	517,96
Steel case with inlay	566030R	128.71



For REMS Tiger/VE/SR, Tiger pneumatic, Tiger 22 VVE and other makes

Special saw blades for right angle sawing and for fast dismantling of steel pipes with power transmitting guide support.

Steel pipes

REMS special saw blades - for right-angled sawing with force-transmitting guide holder, for 400% more sawing power.

Specially developed for REMS Tiger.

Absolutely essential for right angle sawing and for fast dismantling with power transmitting guide support. This produces multiple thrust pressure by a five-fold force-transmitting leverage, for 400% more sawing power. Normal saw blades with single tang do not withstand the high feed pressure during sawing with guide support, they break at the mounting point.

For this reason, extra thick REMS special saw blade, resistant to bending and distortion.

Double tang mounting with exceptionally wide clamping face ensures accurate seating and high stability.

Coarse, corrugated tooth pattern for rapid sawing. Long service life.



Double tang







German Quality Product

REMS special saw blades → REMS Tiger, etc.	Ø inches/ Length mm	Tooth pitch mm	Material*	Teeth	Colour			ArtNo.	€
REMS special saw blade 2"/140-2.5 steel pipes ≤ 2"	2"/140	2.5	HSS-Bi		yellow	5	REMS PAGE Appropriate 3 June 2 Action 5 State 1	561007 R05	62,18
REMS special saw blade 2"/140-3.2 steel pipes ≤ 2"	2"/140	3.2	HSS-Bi		yellow	5	REMS DESCO	561001 R05	58,02
REMS special saw blade 4"/200-3.2 steel pipes ≤ 4"	4"/200	3.2	HSS-Bi		yellow	5	REMS PAS OF THE STATE OF THE ST	561002R05	76,92
REMS special saw blade 6"/260-3.2 steel pipes ≤ 6"	6"/260	3.2	HSS-Bi		jenon	5	REMS FASCO Reserving Pills 2 Mars & Cheery Also many	561008 R05	99,54

For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, use the finer toothed REMS universal saw blade instead of the REMS special saw blade in combination with REMS Tiger SR with electronic speed regulation (page 63).

REMS universal saw blades

For REMS Cat VE, Tiger/VE/SR, Cat 22 VVE and other makes

Universal saw blade for free-hand sawing and for sawing with power transmitting guide support. Instead of many different saw blades.

Many materials, e.g. wood, wood with nails, pallets, metal, even stainless steel, cast iron, breeze blocks, plaster boards, pumice stone, brick

Highly flexible, also ideal for sawing flush with the wall.

REMS universal saw blades - for all sawing jobs.

Only 1 universal saw blade instead of many different saw blades for all sawing jobs. Resilient material, highly flexible, also for flush-to-wall sawing.

Double tang mounting with exceptionally wide clamping face for accurate seating and high stability. Also for sawing with power transmitting guide support. Single tang saw blades are unable to cope with the high thrust pressure when sawing with a guide holder, they break at the clamping point.

Alternating tooth pitch (combi-teeth) for fast, smooth cut, very highly hardened in the teeth area. Straight-set teeth.

Thus outstanding cutting performance and prolonged service life.











German Quality Product				{		// ;}			S
REMS universal saw blades → REMS Tiger, REMS Cat, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour	-		ArtNo.	€
REMS universal saw blade 100-1.8/2.5 for all sawing work	100	Combo 1.8/2.5	HSS-Bi flexible	1,2,2,2,	red	5	REMS	561006 R05	39,96
REMS universal saw blade 150-1.8/2.5 for all sawing work	150	Combo 1.8/2.5	HSS-Bi flexible	יכבכבי	red	5	REMS	561005R05	57,19
REMS universal saw blade 200-1.8/2.5 for all sawing work	200	Combo 1.8/2.5	HSS-Bi flexible	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	red	5	REMS Butter 2 201 A 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	561003R05	75,67
REMS universal saw blade 300-1.8/2.5 for all sawing work	300	Combo 1.8/2.5	HSS-Bi flexible	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	red	5	REMS Based 201-121-121-121-12 Inc Inc an Change	561004R05	111,79

Double tand

Also for nail-embedded wood, pallets. For hard-to-machine materials, e.g. stainless steel pipes, hard cast iron pipes, lower speed required, e.g. by using REMS Tiger SR with electronic speed regulation (page 63).

Saw blades for free-hand sawing for different materials.

Alternating tooth pitch (combi-teeth) for fast, smooth cut, also when sawing mixed materials (wood/metal).

Flexible saw blades, also for sawing flush with wall.


Corrugated teeth for smooth cut with low tooth pitch. Straight-set teeth for aggressive cut with coarse tooth pitch. Straight teeth for saw blades with very wide carbide teeth. Carbide-granulate for materials that are difficult to cut.

INOX

German Quality Product

German duality Froduct									
REMS saw blades for metal → REMS Puma, REMS Cat, REMS Tiger, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour	550		ArtNo.	€
REMS saw blade 150-1 sheet metal, metal, also stainless steel, \geq 1.2 mm	150	1	HSS-Bi flexible		red	5	REMS & C	561105R05	25,74
REMS saw blade 200-1 sheet metal, metal, also stainless steel, ≥ 1.2 mm	200	1	HSS-Bi flexible		red	5	REMS &B	561106 R05	33,74
REMS saw blade 90-1.4 , curved blade metal, also stainless steel, ≥ 1.5 mm	90	1.4	HSS-Bi		red	5	Note that the same of the same	561107 R05	23,87
REMS saw blade 150-1.4 metal, also stainless steel, ≥ 1.5 mm	150	1.4	HSS-Bi flexible		red	5	REMS & E	561104R05	26,88
REMS saw blade 200-1.4 metal, also stainless steel, ≥ 1.5 mm	200	1.4	HSS-Bi flexible		red	5	REMS & E	561108R05	33,94
REMS saw blade 100-1.8 metal, also stainless steel, ≥ 2 mm	100	1.8	HSS-Bi flexible		red	5	REMS SIGNATURE OF THE PROPERTY	561101 R05	23,04
REMS saw blade 150-1.8 metal, also stainless steel, ≥ 2 mm	150	1.8	HSS-Bi flexible		red	5	REMS & E	561103R05	26,88
REMS saw blade 200-1.8 metal, also stainless steel, ≥ 2 mm	200	1.8	HSS-Bi flexible		red	5	REMS & C	561102R05	33,74
REMS saw blade 200-2.5 metal, also stainless steel, ≥ 3 mm	200	2.5	HSS-Bi flexible	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	red	5	REMS &&	561109R05	33,74
REMS saw blade 280-2.5 metal, also stainless steel, ≥ 3 mm	280	2.5	HSS-Bi flexible	·p>p>;	red	5	REMS &&	561112R05	42,77

German Quality Product

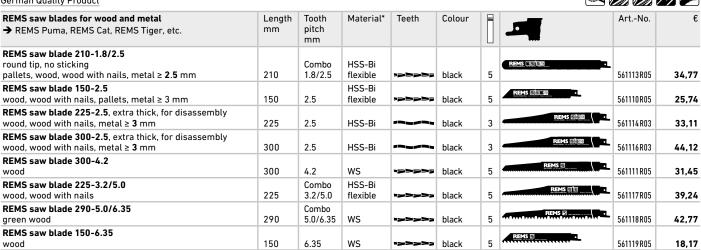

REMS saw blades for different purposes → REMS Puma, REMS Cat, REMS Tiger, etc.	Length mm	Tooth pitch mm	Material*	Teeth	Colour	200		ArtNo.	€
REMS saw blade 150-4.2 breeze blocks, plasterboard	150	4.2	WS	;כעכעי	white	5	REMS	561115R05	22,52
REMS saw blade 225-8.5 breeze blocks, hard wood	225	8.5	НМ	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	white	1	REMS 10 oL	561120R01	58,54
REMS saw blade 300-8.5 breeze blocks, hard wood	300	8.5	НМ	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	white	1	REMS IN ALL THE STATE OF THE ST	561121 R01	70,17
REMS saw blade 400-8.5 breeze blocks, hard wood	400	8.5	НМ	.,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,	white	1	REMS TO THE	561122R01	100,69
REMS saw blade 235-12 breeze blocks, pumice, brick	235	12	НМ		white	1	REMS	561123R01	81,48
REMS saw blade 300-12 breeze blocks, pumice, brick	300	12	НМ		white	1	REMS TO THE TANK THE	561124R01	94,35
REMS saw blade 300-12, extra high blade breeze blocks, pumice, brick	300	12	НМ		white	1	REMS W	561125R01	111,79
REMS saw blade 200 cast iron etc.	200		HM-G	.01011010101010101	white	2	REMS G	561126 RO2	33,63



















Compact, portable circular pipe sawing machine for burr-reduced, right angle and rapid sawing. For stainless steel pipes, carbon steel pipes and copper pipes of the press fitting systems etc. Also for cutting thin-walled sections for front-wall installation. For job site and workshop.

Stainless steel pipes, carbon steel pipes, copper pipes and other materials $\leq \emptyset$ 76 mm

REMS saw blade Ø 225 mm

REMS Turbo Cu-INOX – burr-reduced, right angle, rapid. Burr-reduced sawing through double clamping vice. Powerful, e.g. Ø 22 mm in only 4 s. Easy to transport.

Ideal for pressfitting systems

In accordance with requirements:

<u>Dry sawing</u>, so no damage to 0-rings from lubricants.

Burr-reduced through double clamping vice.

Optimum cutting speed prevents degradation of pipe material through overheating.

Design

Compact, robust, job site-proven. Small in size, handy, portable, only 17 kg. Easy sawing through favourable leverage effect. Fast saw blade change. Precise sawing. Mark on the saw blade protection cover showing the saw blade cutting line. Connection for driving outer/inner pipe deburrer REMS REG 10-54 E. For workbench, stand or wheel stand as an accessory, for easy transport, optimum working height and stable positioning.

Universal double clamping vice

Robust, easy-running universal double clamping vice for burr-reduced sawing. Both pipe ends remain securely clamped during sawing. Easy, secure clamping also of thin-walled pipes through inclined jaw. Only one strong clamping spindle for both clamping sides ensures even, effortless and secure clamping of the material.

Drive

Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Proven universal motor, 500 W. Powerful, e.g. stainless steel pipe \emptyset 22 mm in only 4 s. Ideal speed 60 rpm for optimum cutting speed and smooth sawing.

REMS saw blades

Top German quality. REMS circular saw blade HSS $225 \times 2 \times 32$ mm, 220 teeth, for metal, adjusted to the efficiency of REMS Turbo Cu-INOX for sawing stainless steel tubes. Specially fine-toothed, hardened and ground. For easy and exact sawing. Prolonged durability. REMS circular saw blade HSS-E (cobalt alloyed) $225 \times 2 \times 32$ mm, 220 teeth, for metal, for even better durability. Specially fine-toothed, hardened and ground.

Outer/inner pipe deburrer

Outer/inner pipe deburrer REMS REG 10 – 54 E for pipes Ø 10 – 54 mm, Ø $\frac{1}{2}$ – 2 $\frac{1}{8}$ ", for electric drive with the REMS Turbo Cu-INOX pipe circular sawing machine and others, see page 99.

Supply format

REMS Turbo Cu-INOX Basic. Circular pipe saw with universal double clamping vice for burr-reduced, right angle, rapid sawing. For stainless steel pipes, carbon steel pipes and copper pipes of the press fitting systems etc. Also for cutting thin-walled sections for front-wall installation. For REMS saw blade Ø 225 mm. With maintenance-free gear, proven universal motor 230 V or 110 V, 50–60 Hz, 500 W. Safety tip switch, saw blade protection cover. Speed 60 rpm. Ring spanner. Hexagon key. Without saw blade. For workbench, stand or wheel stand. In a carton

ArtNo.	€
849006 R220	1.287,12

Other voltages on request.

Description	ArtNo.	€
REMS circular saw blade HSS for metal, specially for stainless steel pipes, fine-toothing, $225 \times 2 \times 32$ mm, 220 teeth.	849703R	222,13
REMS circular saw blade HSS-E (cobalt alloyed) circular saw blade HSS-E (cobalt alloyed) toothing, 225 × 2 × 32 mm, 220 teeth. Very long service life.	849706R	309,32
REMS REG 10-54 E outer/inner pipe deburrer, see page	ge 99	
Stand	849315R	216,94
Wheel stand	849310R	351,88
REMS Jumbo, folding workbenches, see page 106.		
REMS Herkules, material supports, see page 107.		







German Quality Product







REMS Turbo K

Compact, mobile, universal circular metal sawing machine for installation, metal working and industry. For job site and workshop.

4	0				•		
90° □	78	55	70 × 50	50 × 50	40	40	50 × 30
45° ⊄	60	55	60×40	50 × 50	40	40	50 × 30

REMS saw blade

Ø 225 mm

REMS Turbo K – the most powerful in its class. Progressive drive, e.g. 2" steel pipe in only 5 s. Easy to transport.

Design

Compact, robust, job site-proven. Small in size, handy, portable, complete only 22 kg. Automatic cooling lubricant unit. Easy sawing through favourable leverage effect. Fast saw blade change. Precise sawing. For workbench, stand or wheel stand as an accessory, for easy transport, optimum working height and stable positioning.

Universal vice

Robust, easy-running universal vice with strong clamping spindle and large clamping lever for effortless, secure clamping of the material. Standard with clamp insert for thin-walled pipes. Quick setting of bevel angle thanks to clearly laid out scale and clamping lever. Simple, sturdy length stop.

Drive

Robust, maintenance-free gear, precisely mounted in roller and needle bearings. Proven universal motor, 1200 W. Extremely strong and powerful, e.g. 2" steel pipe in only 5 s. Ideal speed 115 rpm for fast and smooth sawing.

REMS saw blades

Top German quality. REMS universal circular saw blade HSS $225 \times 2 \times 32$ mm for metal, 120 teeth, adjusted to the efficiency of REMS Turbo K. Specially toothed, hardened and ground. For easy and exact sawing. REMS universal circular saw blade HSS $225 \times 2 \times 32$ mm, 220 teeth, adjusted for sawing stainless steel. Specially fine-toothed, hardened and ground. For an even better durability, REMS universal circular saw blade HSS-E (cobalt alloyed) $225 \times 2 \times 32$ mm, 220 teeth. Specially fine-toothed, hardened and ground.

Kühlschmierstoffe

REMS Sanitol and REMS Spezial (page 47). High lubricating and cooling effect. Essential for clean cuts, long service life of saw blades and machine.







German Quality Product

回游楼间 写上通路 XECA SA 图场温和 Info

Supply format

REMS Turbo K Basic. Universal circular metal sawing machine with automatic cooling lubricant unit. For straight cuts and bevel cuts up to 45°. For REMS saw blade Ø 225 mm. Maintenance-free gear. Proven, powerful universal motor 230 V or 110 V, 50 – 60 Hz, 1200 W. Safety tip switch, saw blade protection cover, length stop. Clamp insert for thin-walled pipes. Speed 115 rpm. Ring spanner. Hexagon key. 1 filling of cooling lubricant REMS Spezial. Without saw blade. For workbench, stand or wheel stand. In a carton.

ArtNo.	€
849007 R220	1.614,09

Other voltages on request.

Accessories

Description	ArtNo.	€
REMS universal circular saw blade HSS		
for metal, 225 × 2 × 32 mm, 120 teeth	849700R	192,03
REMS circular saw blade HSS for metal,		
fine-toothing, 225 × 2 × 32 mm, 220 teeth	849703R	222,13
REMS circular saw blade HSS-E (cobalt alloyed) for metal, fine-toothing, 225 × 2 × 32 mm, 220 teeth.		
Very long service life.	849706R	309,32
Electronic speed regulator		
for hard-to-machine materials, e.g.		
stainless steel pipes, hard cast iron pipes.		
Fixed, optimum speed.	565051 R220	279,22
Cooling lubricants see page 47.		
Stand	849315R	216,94
Wheel stand	849310R	351,88
REMS Jumbo, folding workbenches, see page 106.		
REMS Herkules, material supports, see page 107.		







Cutting Chamfering Deburring Calibrating

	Pipe cutters	74
00	Cutter wheels	81
	Electric pipe cutter/ Cordless pipe cutter	82
	Pipe cutting machines	84
	Pipe shears	90
-6	Pipe cutting and pipe chamfering tools	94
	Pipe deburrers	97
	Calibrating tools and outer-inner pipe deburrer	100

Robust quality tools for cutting pipes. Meets high demands and long service life.

Steel pipes

Ø ½ – 4", Ø 10 – 115 mm

REMS RAS St - quality pipe cutters.

Solid body in forged steel.

Robust spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe and a long service life.

Ergonomic, wide handle provides a powerful in-feed of spindle.

Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Only 1 cutter wheel for pipes Ø % – 4" (10 – 115 mm), wall thickness s \le 8 mm, suitable for both pipe cutters. Cutter wheel for pipes Ø 1 – 4" to wall thickness s \le 12.5 mm available as accessory.



German Quality Products



Supply format

REMS RAS St. Pipe cutter for steel pipes. With cutter wheel. In a carton.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	ArtNo.	€
St 1/8 - 2"	½ - 2" 10 - 60	8	113000R	227,32
St 1¼ – 4"	1¼ – 4" 30 – 115	8	113100R	414,16



Description	s ≤ mm	ArtNo.	€
REMS cutter wheel St 1/8-4", s 8			
for REMS RAS St $\frac{1}{4}$ – 2" and St $\frac{1}{4}$ – 4"	8	341614R	15,47
REMS cutter wheel St 1-4", s 12			
for REMS RAS St 11/4 - 4"	12.5	381622R	35,60



Robust quality tools for cutting tubes.
Particularly suited for cutting stainless steel tubes.

Copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes

Ø 3 – 120 mm Ø 1⁄8 – 4"

REMS RAS Cu-INOX – for places with difficult access.

Small, handy, specially for use in restricted spaces.

Robust design and hardened back pressure rollers provide exact alignment to the tube and a long service life.

Large operating knob in metal for easy in-feed and cutting.

Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX $3-28\,\mathrm{S}$ Mini with needle bearing cutter wheel and needle bearing counter-pressure rollers for very easy cutting.



REMS RAS Cu-INOX. Pipe cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel.

iii blister pack.				
Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	ArtNo.	€
Cu-INOX 3 – 16	3-16 1/8-5/8"	4	113200R	28,55
Cu-INOX 3 – 25	3 – 25 ½ – 1"	4	113230R	34,57
Cu-INOX 3 – 28 Mini	3-28 ½-1½"	4	113240R	39,55
Cu-INOX 3 – 28 S Mini on needle bearings	3-28 ½-1½"	4	113241 R	55,74

REMS RAS Cu-INOX – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX $3-35\,\mathrm{S}$ with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred. $\,$

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.




















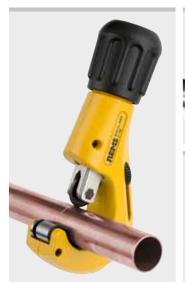









Supply format

REMS RAS Cu-INOX. Pipe cutting machine for copper pipes, thin-walled stainless steel pipes, thin-walled steel-aluminium pipes, brass pipes, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s≤mm	ArtNo.	€
Cu-INOX 3 – 35	3-35 1/8-13/8"	4	113350R	61,14
Cu-INOX 3 – 35 S on needle bearings	3-35 1/8-13/8"	4	113351 R	81,90
Cu-INOX 3-42	3-42 ½-1¾"	4	113330R	76,71

REMS RAS Cu-INOX - quality pipe cutter.

Robust, solid design for heavy-duty application.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

REMS RAS Cu-INOX 8-64 S and REMS RAS Cu-INOX 8-42 S with needle bearing cutting wheel and needle bearing counter-pressure rollers for very easy cutting. Quick adjustment of the engagement spindle in both directions.

Only 1 cutter wheel for the complete working capacity \emptyset 3 – 120 mm.

























German Quality Products

Supply format

REMS RAS Cu-INOX. Pipe cutter for copper tubes, thin-walled stainless steel tubes, thin-walled steel, aluminium, brass tubes. With cutter wheel. In blister pack/in box.

Description	Pipes	Wall thickness	ArtNo.	€
	Ø mm/inch	s ≤ mm		
Cu-INOX 3 – 28	3-28			
	1/8 - 11/8"	4	113300R	33,63
Cu-INOX 6-42	6-42			
	1/4 - 15/8"	4	113380 R	158,81
Cu-INOX 8-42 S				
on needle bearings,	8-42			
with quick adjustment	3/8 - 15/8"	4	113385 R	163,49
Cu-INOX 6-64	6-64			
	1/4 - 21/2"	4	113400R	185,80
Cu-INOX 8-64 S				
on needle bearings,	8-64			
with quick adjustment	3/8 - 21/2"	4	113401R	206,56
Cu-INOX 64-120	64-120			
	21/2 - 4"	4	113500R	268,84

Description	Wall thick- ness s ≤ mm	ArtNo.	€
REMS cutter wheel Cu-INOX 3-120, s 4	4	113210 R	12,04
REMS cutter wheel Cu-INOX 3 – 120 S,			
s 4, on needle bearings	4	113213R	21,07
Universal deburring blade, ground		113360	7,89







Robust quality tools for cutting tubes.

Copper tubes

Ø 3-64 mm Ø 1/8 - 21/2"

REMS RAS Cu - for places with difficult access.


Small, handy, specially for use in restricted spaces.

Robust design and hardened back pressure rollers provide exact alignment to the tube and a long service life.

Large operating knob in metal for easy in-feed and cutting.

Broad, precise cutter wheel bearing on a hardened, non rotating wheel shaft guarantees a right angle cut.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

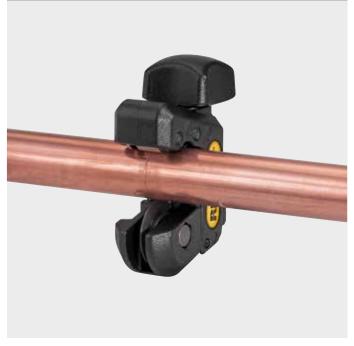




Supply format

REMS RAS Cu. Pipe cutter for copper tubes. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness	ArtNo.	€
	וווווו/ווונוו	s ≤ mm		
Cu 3 – 16	3 – 16 ½ – 5/8"	3	113250R	28,55
Cu 3-25	3-25			
Cu 3-25				
	1/8 – 1"	3	113255R	34,57
Cu 3-28	3-28			
	1/8 - 11/8"	3	113260R	39,55

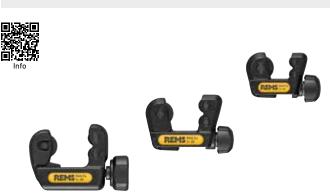

REMS RAS Cu - the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.


Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.







Supply format

REMS RAS Cu. Pipe cutter for copper tubes, with integrated pipe deburring device. With cutter wheel. In blister pack.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	ArtNo.	€
Cu 3-35	3-35 ½-1¾"	3	113340R	58,02
Cu 3-42	3-42 ½-1¾"	3	113320R	69,65



REMS RAS Cu – quality pipe cutter. With quick adjustment.

Solid, handy, U-shaped design.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe, easy in-feed, easy cutting and precise, right angle cut.

Ergonomic, handy operating knob in metal for easy work and long service life.

Ratchet for quick adjustment in both directions.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Only 1 cutter wheel for the complete working capacity \emptyset 3–120 mm.







German Quality Products





Supply format

REMS RAS Cu. Pipe cutter for copper tubes. With cutter wheel. In blister pack/in box.

Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	ArtNo.	€
Cu 8-42 with quick adjustment	8-42 3/8-15/8"	3	113370R	154,66
Cu 8-64 with quick adjustment	8-64 3/8-21/2"	3	113410R	185,80

Accessories

Description	Wall thick- ness s ≤ mm	ArtNo.	€
REMS cutter wheel Cu 3-120, s 3	3	113225R	12,04
Universal deburring blade, ground		113360	7,89





REMS RAS P

REMS RAS P – the compact version with telescopic spindle.

Telescopic spindle. Easy, quick adjustment in both directions.

Compact design for tough use.

Sturdy telescopic spindle, long spindle guidance and 4 specially hardened back pressure rollers ensure exact alignment to the tube, easy in-feed, easy cutting and precise, right angle cut.

 $\label{lem:eq:end} \mbox{Ergonomic, handy operating knob in metal for easy work and long service life}.$

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Fast changing of cutter wheel without tools by cutter wheel axle with ball catch. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Integrated pipe deburring device, on rotating bearing, adapts to the workpiece edge to be deburred.

Specially hardened and ground universal deburring blade guarantees easy deburring and extremely long life.

Fast, simple blade change.

Pipe cutters







Supply format

REMS RAS P. Pipe cutter for plasic pipes and multi-layer composite tubess, with integrated pipe deburring device. With cutter wheel. In blister pack.

with integrated pipe d	ebuiling device. V	itti cutter wileet.	iii bustei k	Jack.
Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	ArtNo.	€
P 10 – 32 T	10-32 ½-13/8"	4,5	290001 R	58,02
P 10-40 T	10 – 40 ½ – 15/8"	4,5	290002R	69,65





High performance quality tools for cutting pipes. With quick adjustment.

Plastic pipes,

multi-layer composite tubes

Ø 10-315 mm Ø ½-12"

REMS RAS P – quality pipe cutter. With quick adjustment.

Solid, handy, U-shaped design.

Sturdy spindle, long spindle guidance and hardened back pressure rollers provide exact alignment to the pipe, easy in-feed, easy cutting and precise, right angle cut.

 $\label{lem:eq:energy} \textbf{Ergonomic, handy operating knob in metal for easy work and long service life}.$

Ratchet for quick adjustment in both directions.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life.

Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Cutter wheels for different wall thicknesses (s).

REMS RAS P 50-125 with integrated pipe deburrer, on rotating bearing, adapts to the workpiece edge to be deburred. Specially hardened and ground universal $\,$ deburring blade guarantees easy deburring and extremely long life. Fast, simple blade change. Additional guide roller, adjustable, for cutting Ø 110 mm or Ø 125 mm pipes Fast cutting wheel change without tools by cutting wheel axle with ball catch.

Supply format

REMS RAS P. Pipe cutter for plasic pipes and multi-layer composite tubes.

with cutter wheet, in blister pack/in box.				
Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	ArtNo.	€
P 10-40* with quick adjustment	10 – 40 ½ – 15/8"	7	290050R	154,66
P 10-63* with quick adjustment	10 – 63 ½ – 2"	7	290000R	196,18
P 50 – 110*, s11 with quick adjustment	50-110 2-4"	11	290100R	234,59
P 50 – 110*, s16 with quick adjustment	50-110 2-4"	16	290100R	234,59
P 50 – 110*, s19 with quick adjustment	50-90 2-3"	19	290100R	234,59
P 50 – 125, s16 with quick adjustment	50-125 2-5"	16	290500 R-S16	241,85
P 110 – 160* with quick adjustment	110 – 160 4 – 6"	16	290200R	289,60

REMS RAS P – cutting up to \emptyset 315 mm, s \leq 19 mm.

Fast and inexpensive cutting of large pipes. Quick adjustment. Separate pipe centering for right angle cutting.

Solid design, double-T-shaped body.

Cutter wheels for different wall thicknesses (s).

Supply format

REMS RAS P. Pipe cutter for plastic pipes and multi-layer composite tubes. With cutter wheel and spare cutter wheel. In sturdy steel case.

Titti oatto: Titloot alla c	pare carrer inne	on motara, otoot	0000.	
Description	Pipes Ø mm/inch	Wall thickness s ≤ mm	ArtNo.	€
P 180 – 315 with quick adjustment	180 – 315 7 – 12"	16	290300	1.717,89

*German Quality Products













P 50-110. s11 P 50-110, s16 P 50-110, s19










Description	s ≤ mm	ArtNo.	€
REMS cutter wheel P 10 – 40, s 4,5 for REMS RAS P 10 – 32 T, 10 – 40 T	4,5	290023R	19,51
REMS cutter wheel P 10 – 63, s 7 for REMS RAS P 10 – 40, 10 – 63	7	290016R	19,51
REMS cutter wheel P 50 – 315, s 11 for REMS RAS P 50 –110, 50 –125, 110 –160, 180 – 315	11	290116R	23,67
REMS cutter wheel P 50 – 315, s 16 for REMS RAS P 50 – 110, 50 – 125, 110 – 160, 180 – 315	16	290216R	28,23
REMS cutter wheel P 50 – 315, s 19 for REMS RAS P 50 – 110, 110 – 160, 180 – 315	19	290316R	45,57

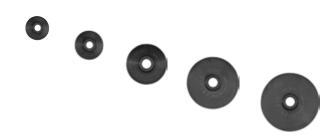

Robust quality tool with two cutting systems for cutting and slitting plastic corrugated protective pipes.

Cutting $\emptyset \le 45 \,\text{mm}$ $\emptyset \le 1\frac{3}{4}$ "

Slitting (lengthwise cutting)

 $ID \ge \emptyset 14 mm$

REMS RAS P/SW 45/L – Cutting and slitting of plastic corrugated protective pipes.

Stable magnesium version, extremely light.

Specially hardened and specially ground blades for cutting and slitting. German quality product.

Four-edged, wedge-shaped blades with a cutting angle of 90° , rotatable 4 times by 90° for four times longer life. Right-angled, burr-free cutting by pipe rest with shaft guide.

Automatic contact pressure when cutting.

Cutting depth limiting of the cutting tools during cutting prevents damage to the inside of the pipe.











Supply format

REMS RAS P/SW 45/L. Pipe cutter/pipe slitter for plastic corrugated protective pipes. With 3 blades. In blister pack.

Pipes Ø mm/inch	ArtNo.	€
≤ 45 mm / ≤ 1¾"	113480R	56,99

Accessories

Description	ArtNo.	€
Blade P/SW 45/L (pack of 3) for REMS RAS P/SW 45/L	113481 R	28,49



REMS RAS W INOX

Highly resistant quality tool for cutting pipes.

Corrugated metal hoses (corrugated pipes)

of stainless steel, also jacketed DN 10 – 32 (40)

³/₈ – 1½" (2")

REMS RAS W INOX 10 – 32/40 S – Quality pipe cutter especially for cutting corrugated metal hoses (corrugated pipes) made of stainless steel.

Compact design for tough use.

Easy in-feed, easy cutting and precise, right angle cut.

Sturdy telescopic spindle, long spindle guide, cutting wheel on needle bearing and 2 specially hardened counter pressure rollers on needle bearings. Three high-molecular plastic guide rollers each on both sides, arranged triangularly for straight guidance of the corrugated metal hose (corrugated pipe) during the cutting process.

Ergonomically designed, comfortable rotary handle.

Specially hardened cutter wheel in approved, tough-hard REMS die-steel quality ensures a long service life. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Pipe cutter



German Quality Products





Supply format

REMS RAS W INOX 10 – 32/40 S. Pipe cutter for corrugated metal hoses (corrugated pipes) of stainless steel, also jacketed. Counter pressure rollers on needle bearings. With cutting wheel, on needle bearing. In blister pack.

Pipes	ArtNo.	€
DN 10-32 (40) / 3/8-11/2" (2")	113450R	216,94

Accessories

80

Description	ArtNo.	€
REMS cutter wheel W INOX 10 – 32/40 S on needle bearings	113461 R	11,83



REMS cutter wheels


Specially hardened cutter wheels in approved, tough-hard REMS die steel, ensure a long service life. German Quality Products.

REMS cutter wheels also fit in suitable pipe cutters of other makes, see table with dimensional data.

REMS cutter wheel	Material	Wall thickness	to fit following pipe cutters	Capacity Ø	ArtNo.	€
St 1/8 – 4", s 8	Steel pipes	s ≤ 8 mm	REMS RAS St 1/8 – 2"	1/8 – 2"	341614 R	15,47
			REMS RAS St 1¼ - 4"	11/4 – 4"		
St 1 – 4", s 12	Steel pipes	s ≤ 12.5 mm	REMS RAS St 1¼ - 4"	11/4 – 4"	381622 R	35,60
Cu-INOX 3-120, s 4	Copper tubes, stainless steel tubes	s ≤ 4 mm	REMS RAS Cu-INOX 3-16	3 – 16 mm	113210 R	12,04
			REMS RAS Cu-INOX 3 – 28	3 – 28 mm		
			REMS RAS Cu-INOX 3-35	3 – 35 mm		
			REMS RAS Cu-INOX 3-42	3-42 mm		
			REMS RAS Cu-INOX 6-42	6-42 mm		
			REMS RAS Cu-INOX 6-64	6-64 mm		
			REMS RAS Cu-INOX 64-120	64 – 120 mm		
			REMS RAS Cu 3-35	3-35 mm		
			REMS RAS Cu 3-42	3-42 mm		
Cu-INOX 3 – 120 S, s 4,	Copper tubes, stainless steel tubes	s ≤ 4 mm	REMS RAS Cu-INOX 3 – 28 S	3-28 mm	113213 R	21,07
on needle bearings			REMS RAS Cu-INOX 3 – 35 S	3-35 mm		
			REMS RAS Cu-INOX 8-42 S	8-42 mm		
			REMS RAS Cu-INOX 8 – 64 S	8-64 mm		
Cu-INOX b 3, s 4	Copper tubes, stainless steel tubes	s ≤ 4 mm	See table "Dimensional data for REMS cutter wheels"		113220 R	12,04
Cu 3-120, s 3	Copper tubes	s ≤ 3 mm	REMS RAS Cu-INOX 3-16	3 – 16 mm	113225 R	12,04
			REMS RAS Cu-INOX 3 – 25	3 – 25 mm		
			REMS RAS Cu-INOX 3 – 28	3 – 28 mm		
			REMS RAS Cu-INOX 3 – 35	3-35 mm		
			REMS RAS Cu-INOX 3-42	3-42 mm		
			REMS RAS Cu-INOX 6-42	6-42 mm		
			REMS RAS Cu-INOX 6-64	6-64 mm		
			REMS RAS Cu-INOX 64-120	64 – 120 mm		
			REMS RAS Cu 3-16	3-16 mm		
			REMS RAS Cu 3-25	3-25 mm		
			REMS RAS Cu 3-28	3-28 mm		
			REMS RAS Cu 3-35	3-35 mm		
			REMS RAS Cu 3-42	3-42 mm		
			REMS RAS Cu 8 – 42	8-42 mm		
			REMS RAS Cu 8-64	8-64 mm		
P 10 – 40, s 4,5	Plastic pipes, composite tubes	s ≤ 4,5 mm	REMS RAS P 10 – 32 T	10 – 32 mm	290023 R	19,51
	, , , , , , , , , , , , , , , , , , ,		REMS RAS P 10 – 40 T	10-40 mm		,
P 10-63, s 7	Plastic pipes, composite tubes	s ≤ 7 mm	REMS RAS P 10 – 40	10-40 mm	290016 R	19,51
	1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1		REMS RAS P 10-63	10-63 mm		,
P 50 – 315. s 11	Plastic pipes, composite tubes	s ≤ 11 mm	REMS RAS P 50 – 110	50 – 110 mm	290116 R	23,67
00 010,511	Tradite pipes, composite tubes	321111111	REMS RAS P 50 – 125	50 – 125 mm	27011010	20,07
			REMS RAS P 110 – 160	110 – 160 mm	-	
			REMS RAS P 180 – 315	180 – 315 mm	-	
P 50 – 315, s 16	Plastic pipes, composite tubes	s ≤ 16 mm	REMS RAS P 50 – 110	50-110 mm	290216 R	28,23
30-313, 3 10	r tastic pipes, composite tubes	3 2 10111111	REMS RAS P 50 – 125	50-125 mm	27021010	20,23
			REMS RAS P 110 – 160	110-160 mm	-	
			REMS RAS P 180-315	180 – 315 mm	-	
P 50 – 315, s 19	Plastic pipes, composite tubes	s ≤ 19 mm	REMS RAS P 50 – 110	50-110 mm	290316 R	45,57
1 30-313, 5 17	i tastic pipes, composite tunes	5 2 17 111111	REMS RAS P 50 – 110	50 – 110 mm	270310 K	43,37
			REMS RAS P 110 – 160	110 – 160 mm	-	
			REMS RAS P 110 – 160	180 – 315 mm	-	
W INOX 10-32/40 S,	Corrugated motal be (113461 R	11,83
on needle bearings	Corrugated metal hoses (corrugated pipes) of stainless steel		REMS RAS W INOX 10-32/40 S	DN 10-32 (40)	113401 K	11,83

Dimensional data for REMS cutter wheels **↓** ‡ID REMS cutter wheel Art.-No. $0D\,mm$ Wmm ID mm St 1/8 - 4", s 8 341614 R 32.30 18.94 9.04 St 1 – 4", s 12 381622 R 41.30 18.94 9.04 Cu-INOX 3-120, s 4 113210 R 19.70 4.93 5.00 Cu-INOX 3 - 120 S. s 4 113213 R 19.70 4.93 5.00 Cu-INOX b 3, s 4 113220 R 18.70 3.07 4.80 Cu 3-120, s 3 113225 R 18.70 4.93 5.00 P 10-40, s 4,5 290023 R 20,50 4,93 5,00 5.97 P 10-63, s 7 290016 R 25.20 6.00 P 50-315, s 11 290116 R 35.30 10 95 8 00 P 50-315, s 16 290216 R 45.30 10.95 8.00 P 50-315, s 19 290316 R 51.30 10.95 8.00 W INOX 10-32/40 S 113461 R 26.60 5.00

German Quality Products

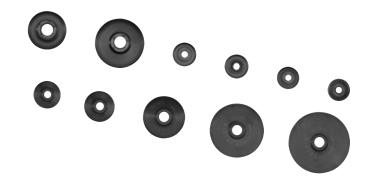

Powerful, handy electric tool for cutting pipe and tubing. For trade and industry. For the building site and the workshop.

Stainless steel pipes of pressfitting	
systems, carbon steel,	Ø 12 – 28 mm
copper	Ø 10-35 mm
Multilayer composite pipes	Ø 10 – 40 mm

REMS Nano – cutting up to Ø 40 mm. Ultra-light. Fast. Right angled. Chip-free. Without outer burr. Dry.

Ideal for pressfitting systems

Right angled cutting, according to requirements
Chip-free, no chips in piping system
No outer burr, no damage to O-ring by outer burr
Dry cutting, no damage to O-rings from lubricants
Fast, prevents degradation of pipe material through overheating.

Design

Mobile, electric pipe cutting machine for fast, right angled cutting without outer burr. Handy and light, only 1.9 kg. Also for fixing to the workbench or in the vice. Strong, torsion-free aluminium structure for right angled cutting. Easy cutting of the pipes by specially designed cutter wheel. Powered cutter wheel for fast cutting. Energy-saving in-feed due to ergonomically designed pressing lever. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

Pipe support

3 sturdy, specially arranged counter-pressure rollers made of hardened precision steel for low-friction turning and safe guidance of the pipes to be cut in the whole working range \emptyset 10–40 mm and for optimisation of the contact points of the cutting wheel on the pipe to be cut (Patent EP 2 077 175). No setting.

Drive

Robust gear precisely mounted in ball and needle bearings, maintenance-free. Proven DC motor 230 V, 130 W. Powerful. e.g. copper pipe Ø 22 mm in only 3 s. Ideal speed 130 rpm for optimum cutting speed of the pipes. Safety switch.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Nano and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.







German Quality Product



Supply format

REMS Nano Basic-Pack. Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10-40 mm, without outer burr. For pipes of the press fitting systems made of stainless steel, carbon steel, Ø 12-28 mm, copper Ø 10-35 mm. Multilayer composite tubes Ø 10-40 mm. With maintenance-free gear, proven DC motor 130 V, 50-60 Hz, 200 W. Speed 130 rpm. Back pressure rollers made of hardened precision steel. Safety switch. Single open ended wrench size 8. Without cutter wheel. In carrying bag.

€	ArtNo.
529,38	844010R220



Description	ArtNo.	€
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	844050 R	38,20
REMS cutter wheel V for multilayer composite pipes	844051R	38,20
Carrying bag	574436R	38,41
L-Boxx system case with inlay for REMS Nano/ Nano 12V, rapid charger, battery, REMS REG 8-35, 2x REMS cutter wheels, metre rule	844045R	146,36
REMS Jumbo, folding workbenches, see page 106.		
REMS Herkules, material supports, see page 107.		



Powerful, mobile, handy electric tool for cutting pipe and tubing. For trade and industry. For the building site and the workshop.

Stainless steel pipes of pressfitting Ø 12 – 28 mm systems, carbon steel, Ø 10 – 35 mm copper Multilayer composite pipes Ø 10-40 mm

REMS Nano 12V - cutting up to Ø 40 mm. Mobile, handy, ultra-light. Fast. Right angled. Chip-free. Without outer burr. Dry.

Ideal for pressfitting systems

Right angled cutting, according to requirements Chip-free, no chips in piping system No outer burr, no damage to 0-ring by outer burr **<u>Dry cutting</u>**, no damage to 0-rings from lubricants Fast, prevents degradation of pipe material through overheating.

Design

Mobile, battery-powered pipe cutting machine for fast, right angled cutting without outer burr. Handy and light, only 2.1 kg. Also for fixing to the workbench or in the vice. Strong, torsion-free aluminium structure for right angled cutting. Easy cutting of the pipes by specially designed cutter wheel. Powered cutter wheel for fast cutting. Energy-saving in-feed due to ergonomically designed pressing lever. Cutter wheel protected against touching the back pressure rollers by in-feed limitation.

3 sturdy, specially arranged counter-pressure rollers made of hardened precision steel for low-friction turning and safe guidance of the pipes to be cut in the whole working range \emptyset 10 – 40 mm and for optimisation of the contact points of the cutting wheel on the pipe to be cut (Patent EP 2 077 175). No setting.

Robust, precision ball and needle bearing gears, maintenance-free. Powerful battery motor 12V, with large power reserve, 270 W output. Super fast, e.g. copper pipe Ø 22 mm in just 3 s. Ideal speed 130 rpm for optimum cutting speed of the pipes. Safety switch.

Li-Ion technologyBattery Li-Ion 12V with 2.5 Ah capacity. Light and powerful. High energy density for many cuts. Overheating and overloading protection by temperature monitor (NTC). Rapid charger 220 - 240 V, 10.8 - 18 V, 65 W, for short charging times. No memory effect for maximum battery performance.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Nano 12V and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.







German Quality Product





Supply format

REMS Nano 12 V Basic-Pack. Electric pipe cutting machine for fast, right angled cutting of pipes Ø 10-40 mm, without outer burr. For pipes of the press fitting systems made of stainless steel, carbon steel, Ø 12-28 mm, copper Ø 10-35 mm. Multilayer composite tubes Ø 10-40 mm. With maintenance-free gear, powerful battery motor 12V, 270 W. Speed 130 rpm. Safety switch. Battery Li-Ion 12V, 2.5 Ah, rapid charger 220 – 240 V, 50 – 60 Hz, 10.8 – 18 V, 65 W. Counter pressures rollers made of hardened precision steel. Single open ended wrench size 8. Without cutting wheel. In carrying bag.

Art.-No. 844011 R220 705,84



Description	ArtNo.	€
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	844050R	38,20
REMS cutter wheel V for multilayer composite pipes	844051 R	38,20
Battery Li-lon 12V, 2.5 Ah	844510R12	139,09
Rapid charger 220 – 240 V, 50 – 60 Hz, 10.8 – 18 V, 65 W	571560R220	154,66
Carrying bag	574436R	38,41
L-Boxx system case with inlay for REMS Nano/ Nano 12V, rapid charger, battery, REMS REG 8–35, 2x REMS cutter wheels, metre rule	844045R	146,36
REMS Jumbo, folding workbenches, see page 106.		
REMS Herkules, material supports, see page 107.		



Light, portable compact machine. Universal for cutting and deburring pipes. For trade and industry. For the building site and the workshop.

Ctainless steel mines of massefitting

Stainless steel pipes of pressfitting

systems, carbon steel, copper \emptyset 8–108 mm Steel pipes EN 10255 (DIN 2440) DN 6–100

Ø 1/8 – 4", Ø 10 – 115 mm

Cast iron pipes (SML) EN 877 (DIN 19522) DN 50-100

Plastic pipes SDR 11

Wall thickness s \leq 10 mm Ø 10 – 110 mm Ø $\frac{10}{4}$ – 4"

Multilayer composite pipes Ø 10 – 110 mm

REMS Cento RF Set

Welded drain pipe/down pipe made

of stainless steel (EN 1124) \emptyset 40 – 110 mm

REMS Cento – Cutting and deburring up to Ø 115 mm. Super fast. Right angled. Chip-free. No outer burr. Dry cutting.

Universal for many pipe types.

Ideal for pressfitting systems
Right angled cutting, according to requirements

<u>Chip-free</u>, no chips in piping system

No outer burr, no damage to 0-ring by outer burr

Dry, no damage to the 0-ring by coolants-lubricants.

Fast, prevents degradation of pipe material through overheating.

Design

Compact, mobile pipe cutting machine for fast, right angled, cutting with no outer burr. Handy and light, only 16.8 kg. Stable, distortion-free cast construction for right angled cutting. Easy pipe-cutting through specially designed cutter wheel. Powered cutter wheel and linear advance for fast cutting (Patent EP 1 782 904). Power saving feed-in through easy to grip, proven advance-lever and needle bearing mounted machine screw spindle. Cutter wheel protected – as movement restricted to before any contact with the rollers. Connection for driving outer/inner pipe deburrer REMS REG 10–54 E. For workbench, stand or wheel stand as an accessory, for easy transport, optimum working height and stable positioning. An alternative feed lever is available for operating the drive unit on the floor, see accessories.

Running rollers

4 strong hardened precision tubular steel running rollers on ball bearings for low-friction turning of the pipes Ø 22–115 mm, Ø ¾. -4" to be cut, trapezoidally arranged, replaceable. No setting work required in the whole working range Ø 22–115 mm. Stainless tubular steel rollers as accessory. Cutting of pipes Ø 8–22 mm by placing two pipe sections Ø 28 × 220 mm on the running rollers. REMS Cento RF with 4 sturdy polyamide rollers mounted on ball bearings, to avoid damage to the pipe surfaces, for low-friction rotation of the welded drain pipes/downpipes of stainless steel (EN 1124) Ø 40–110 mm to be cut; pipe guides Ø 75 and 110 mm prevent the pipe from becoming oval shaped.

Drive

Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Proven universal motor, 1200 W. Powerful, e.g. stainless steel pipe Ø 54 mm in just 4 s. Ideal speed 115 rpm for optimum cutting speed of the pipes. Safety foot-switch with emergency stop.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Cento and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.

Pipe support

Pipe support, height adjustable, for pipes Ø 40-110 mm, Ø $1\frac{1}{2}-4$ ", with operation of the drive unit with feed lever on the floor. Easy moving of the material in all directions when turning, pulling and pushing by four stainless steel balls mounted in a rust-protected housing. Safe guiding of long pipes by use of several pipe supports.

REMS pipe deburrer

Inner pipe deburrer REMS REG 28 – 108 for pipes Ø 28 – 108 mm, Ø % – 4", with circulating friction element on the deburrer housing (Patent EP 2 500 122) for electrical rotary drive by the cutting wheel of the REMS Cento, REMS Cento 22 V pipe cutting machine, as an accessory. Outer/inner pipe deburrer REMS REG 10 – 54 E for pipes Ø 10 – 54 mm, Ø ½ – 2½", for electric drive with the REMS Cento, REMS Cento 22 V pipe cutting machines, see page 99.

Marking device

Marking device for marking the insertion depth for fittings on pipes, as an accessory.















German Quality Product



Supply format

REMS Cento Basic. Pipe cutting machine for fast, right angled, cutting of pipes with no outer burr Ø 8 –115 mm. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 8 –108 mm. For steel pipes EN 10255 (DIN 2440) DN 6–100, Ø % –4", Ø 10–115 mm, cast pipes (SML) EN 877 (DIN 19522) DN 50 –100, plastic tubes SDR 11, wall thickness s \leq 10 mm, Ø 10–110 mm, Ø % –4", composite tubes Ø 10 –110 mm. With maintenance-free gear, proven universal motor 230 V or 110 V, 50 –60 Hz, 1200 W. Speed 115 rpm. Rollers in hardened precision steel pipe for pipes Ø 22–115 mm, Ø % –4". Safety foot-switch. Ring spanner. Without cutter wheel. For workbench, stand or wheel stand. In a carton.

ArtNo.	€
845001 R220	1.463,58

Other voltages on request.



Supply format

REMS Cento RF Set. Pipe cutting machine especially for fast, right-angled cutting of welded drain pipes/down pipes made of stainless steel (EN 1124) Ø 40–110 mm. As Art. No. 845001, but with rollers made of polyamide and pipe guides Ø 75 and 110 mm. Safety foot switch. Ring spanner. With cutting wheel RF. For workbench, stand or wheel stand. In a carton.

ArtN	0. €
845003R2	2.324,08

Other voltages on request.

Accessories

Description	ArtNo.	€
Feed lever with spring plug for operating the drive unit on the floor (for drive units manufactured from 2014 onwards).	845218R	91,66
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	845050R	111,07
REMS cutter wheel Cu specially for pipes of copper pressfitting systems	845053R	111,07
REMS cutter wheel St for steel pipes, cast iron pipes (SML)	845052R	111,07
REMS cutter wheel V for plastic and multilayer composite pipes, wall thickness s ≤ 10 mm	845051R	111,07
REMS cutting wheel C-SF especially for pipes of the pressfitting systems and push fitting systems made from carbon steel, simultaneously produces a chamfer.	845055R	111,07
REMS cutting wheel RF for cutting welded drain pipes/ down pipes made of stainless steel (EN 1124) with REMS Cento RF.	845054R	111,07
Pipe support 1, height adjustable, for pipes \emptyset 40 – 110 mm, \emptyset 1½ – 4", with operation of the drive unit with feed lever on the floor	845220 R	152,59
Hardened, precision tubular steel rollers (pack of 4)	845118 R	214,87
Stainless tubular steel INOX rollers (pack of 4)	845110RINOX	303,10
Polyamide roller (pack of 4)	845131 RPA	355,00
Marking device for marking the insertion depth for fittings on pipes. For REMS Cento, REMS Cento 22 V.	845530R	129,75
REMS REG 10-54 E, outer/inner pipe deburrer, see page	99	
REMS REG 28 – 108, inner pipe deburrer for pipes Ø 28 – 108 mm, Ø ¾ – 4", for electric rotary drive by the cutting wheel of the REMS Cento, REMS Cento 22V pipe cutting machine (with REMS cutting wheel		

REMS REG 28–108 , inner pipe deburrer for pipes \emptyset 28–108 mm, \emptyset %–4", for electric rotary drive by the cutting wheel of the REMS Cento, REMS Cento 22V		
pipe cutting machine (with REMS cutting wheel		
Art. No. 845050 or 845053).	113840R	333,20
Stand	849315R	216,94
Wheel stand	849310R	351,88
REMS Jumbo, folding workbenches, see page 106.		
REMS Herkules, material supports, see page 107.		
L-Boxx H system case for REMS Cento/Cento RF	845085R	142.73



Light, mobile compact machine. Universal for cutting and deburring pipes. For trade and industry. For the building site and the workshop. Li-lon 22 V Technology. For battery and corded operation.

Stainless steel pipes of pressfitting

systems, carbon steel, copper \emptyset 8–108 mm Steel pipes EN 10255 (DIN 2440) DN 6–100

Ø ½ – 4", Ø 10 – 115 mm

Cast iron pipes (SML) EN 877 (DIN 19522) DN 50-100

Plastic pipes SDR 11

Wall thickness s ≤ 10 mm \emptyset 10 – 110 mm \emptyset $\frac{1}{8}$ – 4"

Multilayer composite pipes Ø 10 – 110 mm

REMS Cento 22V – Mobile cutting and deburring up to Ø 115 mm. Super fast. Right angled. Chip-free. No outer burr. Dry cutting. Li-lon 22V Technology. Li-lon 21.6V, 5.0 Ah battery, for approx. 280 stainless steel pipe sections of the Ø 22 mm press fitting systems with one battery charge*.

Universal for many pipe types.

Ideal for pressfitting systems

Right angled cutting, according to requirements
Chip-free, no chips in piping system
No outer burr, no damage to O-ring by outer burr
Dry, no damage to the O-ring by coolants-lubricants.
Fast, prevents degradation of pipe material through overheating.

Design

Compact, mobile cordless pipe cutting machine for fast, right angled, cutting with no outer burr. Handy and light, drive unit with battery only 17.6 kg. Stable, distortion-free cast construction for right angled cutting. Easy pipe-cutting through specially designed cutter wheel. Powered cutter wheel and linear advance for fast cutting (Patent EP 1782 904). Power saving feed-in through easy to grip, proven advance-lever and needle bearing mounted machine screw spindle. Cutter wheel protected – as movement restricted to before any contact with the rollers. Practical handle for easy transport. Connection for driving outer/inner pipe deburrer REMS REG 10–54 E. For workbench, stand or wheel stand as an accessory, for easy transport, optimum working height and stable positioning. An alternative feed lever is available for operating the drive unit on the floor, see accessories.

Running rollers

4 strong hardened precision tubular steel running rollers on ball bearings for low-friction turning of the pipes Ø 22–115 mm, Ø ¾ – ¼ to be cut, trapezoidally arranged, replaceable. No setting work required in the whole working range Ø 22–115 mm. Stainless tubular steel rollers as accessory. Cutting of pipes Ø 8–22 mm by placing two pipe sections Ø 28×220 mm on the running rollers.

Drive

Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Powerful 21.6 V battery motor, e.g. stainless steel pipe \emptyset 54 mm in just 7 s. Ideal speed 84 rpm for optimum cutting speed of the pipes. Machine status check with overload protection of the drive unit against too high currents, with overheating protection by motor temperature monitoring (NTC), with electronic battery charging status check with charging level indication by a 2-coloured green/red LED. Safety foot-switch with emergency stop.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6V, 4.4Ah battery for approx. 246 stainless steel pipe sections, 5.0 Ah battery for approx. 280 stainless steel pipe sections, 9.0 Ah for approx. 520 stainless steel pipe sections of the 0.22 mm press fitting systems with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100–240V, 90W. Rapid charger 100–240V, 290W, for shorter charging times, as accessory. Voltage supply 220–240V/21.6V, 40 A output, for mains operation instead of Li-lon battery 21.6 V,

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS Cento 22V and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.

Pipe support

Pipe support, height adjustable, for pipes Ø 40-110 mm, Ø $1\frac{1}{2}-4$ ", with operation of the drive unit with feed lever on the floor. Easy moving of the material in all directions when turning, pulling and pushing by four stainless steel balls mounted in a rust-protected housing. Safe guiding of long pipes by use of several pipe supports.











German Quality Product



REMS pipe deburrer

Inner pipe deburrer REMS REG 28–108 for pipes Ø 28–108 mm, Ø ¾–4", with circulating friction element on the deburrer housing (Patent EP 2 500 122) for electrical rotary drive by the cutting wheel of the REMS Cento, REMS Cento 22V pipe cutting machine, as an accessory. Outer/inner pipe deburrer REMS REG 10–54 E for pipes Ø 10–54 mm, Ø ½–2½", for electric drive with the REMS Cento, REMS Cento 22V pipe cutting machines, see page 99.

Marking device

Marking device for marking the insertion depth for fittings on pipes, as an accessory.

Supply format

REMS Cento 22 V Basic. Cordless pipe cutting machine for fast, right angled, cutting of pipes with no outer burr Ø 8 – 115 mm. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 8 – 108 mm. For steel pipes EN 10255 (DIN 2440) DN 6 – 100, Ø % – 4", Ø 10 – 115 mm, cast pipes (SML) EN 877 (DIN 19522) DN 50 – 100, plastic tubes SDR 11, wall thickness s \leq 10 mm, Ø 10 – 110 mm, Ø % – 4", composite tubes Ø 10 – 110 mm. With maintenance-free gear, powerful 21.6 V battery motor. Speed 84 rpm. Machine status check with overload protection, temperature monitoring, battery charging status check. Rollers in hardened precision steel pipe for pipes Ø 22 – 115 mm, Ø % – 4". Safety foot-switch. Li-Ion 21.6 V, 5.0 Ah battery, 100 – 240 V, 50 – 60 Hz, 90 W rapid charger. Ring spanner. Without cutter wheel. For workbench, stand or wheel stand. In a carton.

€	ArtNo.	
2.055,24	845002R220	


Other voltages on request.

571574R22 571581R22 571583R22 571585R220	372,64 310,36 414,16
571583R22	
	414,16
571585 R220	
01100011220	175,42
571587 R220	414,16
571578R220	517,96
845218R	91,66
845050R	111,07
845053R	111,07
845052R	111,07
845051R	111,07
845055R	111,07
845220 R	152,59
845118R	214,87
845110 RINOX	303,10
	571578R220 845218R 845050R 845053R 845052R 845051R 845055R 845220R

REMS REG 10-54	E. outer/in	ner pipe debur	rer, see page 99

REMS REG 10 – 54 E, outer/inner pipe deburrer, see page	e 99	
REMS REG 28–108, inner pipe deburrer for pipes \emptyset 28–108 mm, \emptyset %–4", for electric rotary drive by the cutting wheel of the REMS Cento, REMS Cento 22V pipe cutting machine (with REMS cutting wheel Art. No. 845050 or 845053).	113840R	333,20
Stand	849315R	216,94
Wheel stand	849310R	351,88
REMS Jumbo, folding workbenches, see page 106.		
REMS Herkules, material supports, see page 107.		
REMS Lumen 2800 22V, cordless LED flood light, see pa	ge 111	



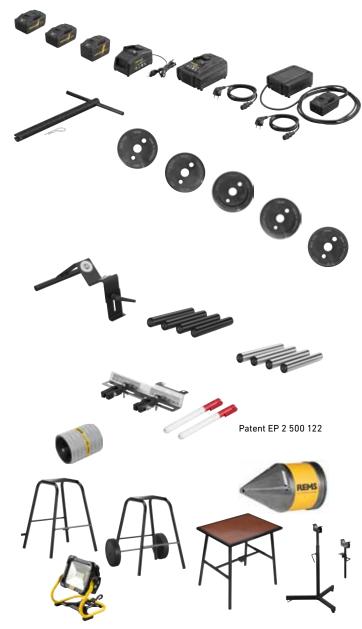

Robust, mobile compact machine. Universal for cutting pipes. For trade and industry. For the building site and the workshop.

Stainless steel pipes of pressfitting systems, carbon steel, copper	Ø 54–225 mm
Steel pipes EN 10255 (DIN 2440)	DN 40-150 Ø 1½-6"
Cast iron pipes (SML) EN 877 (DIN 19522)	DN 50-200
Plastic pipes SDR 11 Wall thickness s ≤ 21 mm	Ø 40 – 225 mm
Multilayer composite pipes	Ø 40 – 110 mm

REMS DueCento – Cutting up to Ø 225 mm. Right angled. Chip-free. Ready for welding. Fast. No outer burr. Dry cutting.

Universal for many pipe types.

Right angled cutting, according to requirements
Chip-free, no chips in the pipe system, no dust
Weldable, for muff and butt welds
Fast, without impairment of the pipe material by overheating
Without outside burr, easy insertion into connecting muffs
Dry cutting, without impairment by coolant lubricants

Design

Compact, mobile pipe cutting machine for fast, right angled, cutting with no outer burr. Handy and easily transportable, only 37 kg. Stable, distortion-free cast construction for right angled cutting. Easy pipe-cutting through specially designed cutter wheel. Powered cutter wheel and linear advance for fast cutting (Patent EP 1 782 904). Power saving feed-in through easy to grip, proven advance-lever and needle bearing mounted machine screw spindle. Cutter wheel protected – as movement restricted to before any contact with the rollers. Practical chassis with two rubber tyred wheels for easy transport.

Running rollers

4 strong hardened precision tubular steel running rollers on ball bearings for low-friction turning of the pipes to be cut, arranged in convex square for centred thrust pressure of the cutting wheel in the working range Ø 100–225 mm, Ø 4–6", without setting work (Patent EP 2 740 556). Roller insert for cutting pipes Ø 40–110 mm, Ø $1\frac{1}{2}$ –4", as an accessory.

Drive


Robust gear, precisely mounted in roller and needle bearings, maintenance-free. Proven universal motor, 1200 W. Powerful, e.g. plastic tube PE \emptyset 225 mm in just 15 s. Ideal speed 115 rpm for optimum cutting speed of the pipes. Safety footswitch with emergency stop.

REMS cutter wheels

Top German quality. Cutter wheels specially designed to the performance capability of the REMS DueCento and for numerous pipe materials with variable cutting geometries for fast cutting with no outer burr. Specially hardened, from proven, through-hardened REMS die-steel, ensuring long service life.

Pipe supports

Pipe supports, height adjustable, for pipes Ø 40 – 110 mm, Ø $1\frac{1}{2}$ – 4" and Ø 100 – 225 mm, Ø 4 – 8". Easy moving of the material in all directions when turning, pulling and pushing by four stainless steel balls mounted in a rust-protected housing. Safe guiding of long pipes by use of several pipe supports.

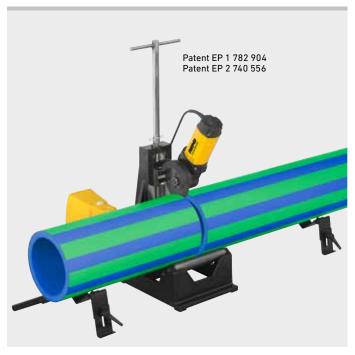






German Quality Product



Supply format

REMS DueCento Basic. Pipe cutting machine for fast, right angled cutting of pipes Ø 40-225 mm, without outside burr. For pipes of the press fitting systems made from stainless steel, carbon steel, copper, Ø 54-225 mm. For steel pipes EN 10255 (DIN 2440) DN 40-150, Ø 1%-6", cast pipes (SML) EN 877 (DIN 19522) DN 50-200, plastic tubes SDR 11, wall thickness s ≤ 21 mm, Ø 40-225 mm, Ø 1%-8", composite tubes Ø 40-110 mm. With maintenance-free gears, proven universal motor 110 / 230 V, 50-60 Hz, 1,200 W. Speed 115 rpm. Hardened, precision tubular steel rollers for pipes Ø 100-225 mm, Ø 4-6". Safety foot switch. Ring spanner. Without cutter wheel. 2 height adjustable pipe supports 1 for pipes Ø 100-225 mm, Ø 4-8". In a carton.

ArtNo.	€
845004R220	2.896,02



Accessories

Description	ArtNo.	€
DEMC autter wheel Cu INOV for stainless steel nines		
REMS cutter wheel Cu-INOX for stainless steel pipes of pressfitting systems, copper, carbon steel	845050R	111,07
REMS cutter wheel Cu	0/50500	444.05
specially for pipes of copper pressfitting systems	845053R	111,07
REMS cutter wheel St for steel pipes,		
cast iron pipes (SML)	845052R	111,07
REMS cutting wheel C-SF especially for pipes of the		
pressfitting systems and push fitting systems made from carbon steel, simultaneously produces a chamfer.	845055R	111.07
nom earbon steet, simultaneously produces a chamier.	04303310	111,07
REMS cutter wheel V, s 10 for plastic and multilayer		
composite pipes, wall thickness s ≤ 10 mm	845051R	111,07
REMS cutter wheel P, s 21 for plastic and multilayer	845057R	140.13
composite tubes, wall thickness s ≤ 21 mm	843U3/K	140,13
Pipe support 1, height adjustable		
for pipes Ø 100 – 225 mm, Ø 4 – 8"	845220R	152,59
Pipe support 2, height adjustable, for pipes		
Ø 40 – 110 mm, Ø 1½ – 4" (roller insert required)	845230R	152,59
Pellow insort for outting pines (4.0, 110 mm (4.11//"	845060R	242.89
Roller insert for cutting pipes Ø $40-110$ mm, Ø $1\frac{1}{2}-4$ "	04J00UK	242,07





Robust quality tool for clean, fast cutting of pipes in one cut. Stable magnesium version. For one-hand operation.

Flexible plastic hoses,

soft plastic pipes

≤ Ø 28 mm ≤ Ø 1⅓"

REMS ROS P flex — Fast cutting in one cut. Ideal for cutting flexible plastic hoses and soft plastic pipes.

Stable magnesium version, extremely light.

Ergonomically designed handles for fast cutting in one cut. For one-hand operation.

Blade drawback by spring-loaded articulated lever.


Specially hardened and specially ground, wedge-shaped blade with cutting angle of 110°, PTFE-coated. Ideal for cutting hoses and soft plastic pipes.

Right-angled, burr-free cutting by pipe rests on both sides and bilaterally clamped blade.

One-hand locking for safe transport and protection of the blade.

Chip-free cutting - no chips left in the pipe.

REMS ROS P flex 28 S with softgrip. Needle bearing-mounted articulated lever for easy cutting in one step.

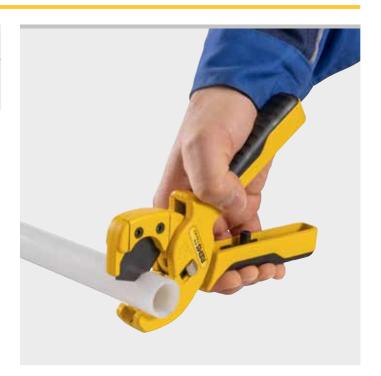



Supply format

REMS ROS P flex. One-hand pipe shears for flexible plastic hoses and soft plastic pipes. With blade. In blister pack.

and cont plactic pipeer miti blade	p		
Description	Pipes ≤ Ø mm/inch	ArtNo.	€
P flex 14	14		
	9/16"	291400R	53,46
P flex 22	22		
	7∕8"	291410R	59,79
P flex 28 S	28		
on needle bearings	11/8"	291430R	84,08



Description	ArtNo.	€
Blade P flex 14 for REMS ROS P flex 14	291401 R	26,73
Blade P flex 22 for REMS ROS P flex 22	291411 R	29,84
Blade P flex 28 for REMS ROS P flex 28 S	291431 R	33,58







Robust quality tool for clean, fast cutting of pipes in one cut. With integrated pipe cutter for protective corrugated tubes. Stable magnesium version. For one-hand operation.

Plastic tubes, composite tubes	≤ Ø 26 mm ≤ Ø 1"
Protective corrugated plastic tubes	Ø 18-35 mm Ø 34-13%"

REMS ROS P 26/SW 35 S – Universal for many materials. Ideal for cutting composite pipes and PEX pipes. Fast cutting in one cut. With integrated pipe cutter for protective plastic corrugated tube.

Stable magnesium version, extremely light.

Ergonomically designed handles with softgrip for fast cutting in one cut. For one-hand operation.

Needle bearing-mounted articulated lever for easy cutting in one step.

Blade drawback by spring-loaded articulated lever.

One-hand locking for safe transport and protection of the blade.

Specially hardened and specially ground, rounded blade for low-wear working, PTFE-coated. 4 counter pressure rollers on needle bearings. For easy swivelling of the pipe shears during the cutting process. Ideal for cutting composite pipes, PEX pipes and similar.


Right-angled, burr-free cutting by extra-wide pipe rests on both sides and bilaterally clamped blade.

Cutting of protective corrugated pipes by 4 cutting tools at the end of the handle.

Three-edged, wedge-shaped cutting tools with a cutting angle of 120° , rotatable 3 times by 120° for three times longer life.

Cutting depth limiting of the cutting tools during cutting of corrugated protective pipes prevents damage to the inside of the pipe.

Chip-free cutting - no chips left in the pipe.

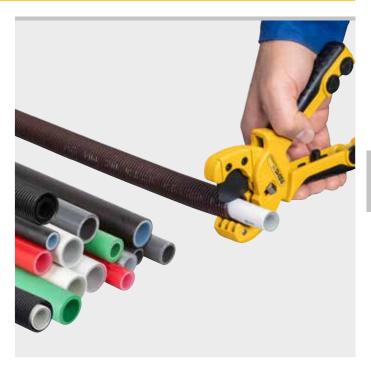







Supply format

REMS ROS P 26/SW 35 S. One-hand pipe shears for plastic and composite pipes with integrated pipe cutter for plastic corrugated protective pipes. 4 counter pressure rollers on needle bearings. With blade and 4 cutting tools. In blister pack.

pressure rollers on needle bearing	Pipes ≤ Ø mm/inch	ArtNo.	€
	P 26/1" SW 35/13/8"	291242R	116,26



Accessories

Description	ArtNo.	€
Blade P 26/SW 35 for REMS ROS P 26/SW 35 S	291243R	46,50
Cutting tool P26/SW 35, pack of 4 for REMS ROS P 26/SW 35 S	291244R	46,50





Robust quality tool for clean, fast cutting of pipes in one cut. Stable magnesium version. For one-hand operation.

Plastic pipes, multilayer composite pipes ≤ Ø 26 mm

≤ Ø 1"

REMS ROS P 26 - fast cutting in one cut.

Stable magnesium version, extremely light.

Ergonomically designed handles for fast cutting in one cut. For one-hand operation.

Blade drawback by spring-loaded articulated lever.

One-hand locking for safe transport and protection of the blade.

Specially hardened and specially ground blade, PTFE-coated.

Right-angled, burr-free cut by pipe rest on both sides and blade guided on both sides.

Chipless cutting – no chips remaining in pipe.





Supply format

REMS ROS P 26. One-hand pipe shears for plastic and multilayer composite tubes. With blade. In blister pack.

Pipes ≤ Ø mm/inch	ArtNo.	€
26		
1"	291240R	57,30



Robust quality tool for clean, fast cutting of pipes in one cut. Stable magnesium version. For one-hand operation.

PEX pipes and similar

≤ Ø 28 mm

≤ Ø 11/8"

All prices excl. VAT

REMS ROS PEX 28 S - fast cutting in one cut. Ideal for cutting PEX pipes.

Stable magnesium version, extremely light.

Ergonomically designed handles with softgrip for fast cutting in one cut. For one-hand operation.

Needle bearing-mounted articulated lever for easy cutting in one step.

Blade drawback by spring-loaded articulated lever.

One-hand locking for safe transport and protection of the blade.

Specially hardened and specially ground, wedge-shaped blade with cutting angle of 150° for low-wear working, PTFE-coated. Ideal for cutting PEX pipes.

Right-angled, burr-free cut by pipe rest on both sides and blade guided

Chipless cutting - no chips remaining in pipe.







REMS ROS PEX 28 S. One-hand pipe shears for PEX pipes, on needle bearing. With blade In blister back

With blade. In blister pack.			
	Pipes ≤ Ø mm/inch	ArtNo.	€
	28 / 11/8"	291420R	87.30



Description	ArtNo.	€
Blade P 26 for REMS ROS P 26	291241 R	22,94
Blade PEX 28 for REMS ROS PEX 28 S	291421R	34.82





REMS ROS P

Handy quality tools for clean, fast pipe cuts. For thin-walled pipes also. Sturdy aluminium/ magnesium version. For single-hand operation.

Plastic pipes, multi-layer composite tubes $\leq \emptyset$ 63 mm $\leq \emptyset$ 2"

REMS ROS P 35 / ROS P 35 A / ROS P 42 / ROS P 42 PS / ROS P 42 S / ROS P 63 P / ROS P 63 S

Sturdy aluminium version, REMS ROS P 42 S and magnesium (Mg) version P 63 S, ultra light.

Specially hardened, wedge-shaped blade, also for thin-walled pipes.

For single-hand operation. Effortless working through power transmitting ratchet feed. $\label{eq:continuous}$

Quick reverse saves time and effort. REMS ROS P 35 A with automatic quick reverse after completion of cutting.

Right angle, burr-free cut through exact pipe support and guided blade on both sides

Chipless cutting – no chips remaining in pipe.



REMS ROS P. One-hand pipe shears for plastic pipes and multi-layer composite tubes. With blade. In blister pack/in box.

Description	Pipes ≤ Ø mm/inch	ArtNo.	€
P 35	35		
with quick reverse	13/8"	291200R	62,07
P 35 A			
with automatic	35		
quick reverse	13/8"	291220	79,10
P 42	42		
with quick reverse	15/8"	291250R	135,98
P 42 PS	42		
with quick reverse	15/8"	291000RPS	83,87
P 42 S	42		
with quick reverse	15/8"	291010R	94,46
P 63 P	63		
with quick reverse	2"	291270R	165,04
P 63 S	63		
with quick reverse	2"	291290R	180,61

Robust quality tools for clean, fast pipe cuts. Robust steel version.

Plastic pipes

 \leq Ø 75 mm, \leq Ø $2\frac{1}{2}$ "

REMS ROS P 75 P

Robust steel version for rugged conditions and long life, with end stop for powerful engagement, also ideal for thick-walled plastic pipes.

Rough, non-slip handle for good grip.

Specially hardened and specially ground, wedge-shaped blade with cutting angle of 150° for low-wear working.

Fast, easy operation through guided ratchet on both sides and fine-toothed ratchet gear, specially hardened.

Right angle, burr-free cut through two-point pipe support and guided blade on both sides.

Chipless cutting – no chips remaining in pipe.

Supply format REMS ROS P 75 P. Pipe shear for plastic pipes. With blade. In a carton. Description Pipes ≤ Ø mm/inch | Art.-No. € 75 / 2½" 291101R 360,19









Accessories

Description	ArtNo.	€
Blade P 35 for REMS ROS P 35	291201	24,91
Blade P 35 A for REMS ROS P 35 A	291221	31,66
Blade P 42 for REMS ROS P 42	291251	54,39
Blade P 42 PS for REMS ROS P 42 PS	291023	33,63
Blade P 42 S for REMS ROS P 42 S	291036R	41,94
Blade P 63 P for REMS ROS P 63 P	291271	66,02
Blade P 63 S for REMS ROS P 63 S	291037 R	66,02
Blade P 75 P for REMS ROS P 75 P	291112	144,28



Robust quality tool for right-angle, plain cutting and chamfering (15°) in one operation. Can be used anywhere, free-hand, on parallel vice or work bench.

Plastic pipes in ABS, PB, PE, PE-HD, PE-X, PP, PVC, PVDF

Ø 40 – 110 mm

REMS Cut 110 P – cutting and chamfering at the same time.

Robust metal design for tough use.

Cutting and chamfering in one operation. While turning the tool shaft, also cutting only possible.

Fast and easy to use, ergonomic clamping grip.

Spring loaded clamp inserts in plastic for concentric clamping of different pipe sizes. Easy to change without tools.

Steplessly adjustable clamping pressure accomodates pipe tolerances.

Cutting and chamfering tool in hard metal with optimum cutter geometry ensures precise cutting and chamfering. Long service life.

Holder for workbench for effortless operation.

Tool set Cu-INOX and clamp inserts for cutting welded rain gutter pipes in copper, titanium zinc, stainless steel, as accessory.





Supply format

REMS Cut 110 P Set. Pipe cutting and pipe chamfering tool for plastic pipes in ABS, PB, PE, PE-HD, PE-X, PP, PVC, PVDF, Ø 40 – 110 mm.Quick clamping device Ø 110 mm with 2 each of clamping inserts Ø 50 and 75 mm. Tool set P with cutting and chamfering blade P, s 11. In sturdy case.

3	.,	
Description	ArtNo.	€
Set 50 + 75 + 110	290400R 49 0	0,97



Description	Pipes Ø mm	ArtNo.	€
Clamping inserts (pack of 2)	40	290420	81,90
	50	290421	81,90
	52	290422	81,90
	56	290444	81,90
	58	290423	81,90
	60	290445	81,90
	63	290427	81,90
	75	290424	81,90
	76	290446	81,90
	78	290425	81,90
	80	290447	81,90
	87	290448	81,90
	90	290426	81,90
	100	290449	81,90
Tool set P			
with cutting and chamfering blade	P, s 11	290432R	86,36
Cutting and chamfering blade P, s	s 11	290430	34,98
Cutting and chamfering blade P, s	15.5	290431	56,05
Tool set Cu-INOX			
with cutter wheel Cu-INOX 3-120,	s 4	290433R	86,36
REMS cutter wheel Cu-INOX 3-12	20, s 4	113210R	12,04
Holder for work bench		290440R	92,80
Case		290437	64,36





Robust quality tool for right-angle cutting of welded pipe. Can be used anywhere, free-hand, on parallel vice or work bench.

Welded copper drainpipe/downpipe,

Titanium zinc, stainless steel (EN 1124) Ø 50 – 110 mm

REMS Cut 110 Cu-INOX – Easy cutting of downpipes.

Robust metal design for tough use.

Fast and easy to use, ergonomic clamping grip.

Spring loaded clamp inserts in plastic for concentric clamping of different pipe sizes. Easy to change without tools.

Steplessly adjustable clamping pressure accomodates pipe tolerances.

Cutting and chamfering tool in hard metal with optimum cutter geometry ensures precise cutting and chamfering. Long service life.

Holder for workbench for effortless operation.

Tool set P and clamp inserts for right-angle, plain cutting and chamfering (15°) of plastic pipe, as accessory, see page 94.



Supply format

REMS Cut 110 Cu-INOX Set. Pipe cutter for welded drainpipes/downpipes made of copper, titanium zinc, stainless steel (EN 1124), Ø 50-110 mm. Quick action clamp Ø 110 mm with clamp inserts. Tool set Cu-INOX with cutter wheel Cu-INOX 3-120, s 4. In sturdy case.

,		
Description	ArtNo.	€
Set 50 + 75 + 110	290412R	533,53
Set 60 + 80 + 100 + 110	290410R	643,56
Set 76 + 87 + 100 + 110	290411 R	670.55



Accessories

Description	ArtNo.	€
Clamp inserts, see page 94.		
Tool set Cu-INOX with cutter wheel Cu-INOX 3 – 120, s 4	290433R	86,36
REMS cutter wheel Cu-INOX 3 – 120, s 4	113210R	12,04
Holder for work bench	290440R	92,80









Handy quality tools for simple and fast external chamfering (15°) of pipes.

Plastic pipes \emptyset 16 – 250 mm, \emptyset 3⁄4 – 10" Wall thickness \leq PN 16

REMS RAG - chamfering at 15°.

Chamfering at 15° on commonly used plastic pipes.

Also suited for deburring plastic pipes. Ensures easy joining of sleeves to be welded.

Easily adjusted for pipe diameter and wall thickness.

Very fast and easy chamfering due to a particularly favourable cutting geometry of the chamfering blades.

Two adjacent, identical chamfering blades, one of which cuts the chamfer and the other one serves as a support for the pipe during chamfering. If the cutting chamfering blade is worn, it can be exchanged with the support part, for double the service life.

Easy-to-slide V-block with two different bevel angles for good guidance of small pipe sizes. In high-grade, glass-fibre reinforced polyamide.



German Quality Product



Supply format			
REMS RAG. Pipe chamfering tool	for plastic pipes. With bla	ades. In a ca	rton.
Description	Pipes ≤ Ø mm/inch	ArtNo.	€
P 16-110	16-110 / 3/4-4"	292110R	213,83
P 32-250	32-250 / 11/4-10"	292210R	250,16





Description	ArtNo.	€
Chamfering blades (pack of 2) for REMS RAG P 16-250	292011	85,53

Universal quality tool for deburring tubes and edges of different materials.

Copper, steel, brass, aluminium, plastic.

REMS REG Universal – the all-purpose deburrer.

Robust metal design for tough use.

Easy handling and good grip thanks to ergonomically designed hexagon handle. Rotating universal deburrer blade in handle accommodates to the work piece edge to be deburred.

Specially hardened and specially ground universal deburrer blade guarantees easy deburring and long service life.

Fast, simple blade replacement by pulling back the front sliding sleeve.



REMS REG Universal. Universal deburrer. For copper, steel, brass,

atummum, plastic. on caruboaru.		
	ArtNo.	€
	113910R	26,78



Accessories

Description	ArtNo.	€
Universal deburring blade, ground	113360	7,89

REMS REG St 1/4 - 2"

Robust quality tool for inner pipe deburring. For electric operation.

REMS REG St % **– 2**". Inner pipe deburrer for electric operation. For steel pipes and other pipes, Ø % – 2". In a carton.

Steel pipes and other pipes

0.4 - 2

REMS REG St ¼ - 2": effortless electric deburring.

Inner pipe deburrer with octagonal attachment head for operating by means of electric die stocks with octagonal seat, e.g. REMS Amigo E, REMS Amigo, REMS Amigo 2, REMS Amigo 2 Compact.

Specially hardened and designed deburring blade ensures easy deburring and extremely long life. Double edges for optimum chip flow, specially for small sizes.



German Quality Product

Outer-inner tube deburrer

Inner pipe deburrer



ociman duality i roduc

REMS REG 3 – 35

Sturdy manual tool for outer-inner tube deburring.

Copper, brass, aluminium,

steel, plastic tubes

Supply format

Ø 3-35 mm

Art.-No. 731700

Ø 1/8 - 13/8"

150.51

REMS REG 3 – 35 – the sharp edge.

Fast, effortless deburring through 3 specially hardened and ground deburring blades.

Robust housing in shock-proof, resistant plastic.

Supply format

REMS REG 3 – 35. Outer-inner tube deburrer. For copper, brass, aluminium, steel, plastic tubes, Ø 3-35 mm, Ø 16-13%. In blister pack.

		170 . III buster pacit.	00 111111, 0 70	plastic tabes, p o
€	ArtNo.			
20,03	113900R			



German Quality Product

Robust quality tool for removing outer and inner burr from pipes.

Stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes

Ø 8-35 mm Ø 3%-13%"

REMS REG 8-35 – the multiple edge up to Ø 35 mm.

Easy, effortless deburring through multiple blades which are specially hardened and ground.

Robust metal design for tough use.



Supply format

REMS REG 8 – 35. Outer-inner pipe and tube deburrer. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 8-35 mm, Ø %-1%". In blister pack.

€	ArtNo.	
66,95	113825 R	



REMS REG 10-42

Robust, solid all-metal tool for outer-inner pipe and tube deburring. For manual or electric operation.

Stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes

Ø 10 – 42 mm Ø ½ – 15/8"

REMS REG 10-42 - by hand or electric. Specially for stainless steel pipes.

ldeal for pipes of all types. Specially for stainless steel tubes of pressfitting systems.

Easy and fast deburring through an appropriate, solid all-metal tool, equipped with 4 specially hardened and ground deburring blades

Driver for electrical drive by REMS Helix 22V VE cordless drill/screwdriver (page 108) and other power drills/screwdrivers (speed \leq 300 rpm), as an accessory.

Outer-inner pipe deburrer



German Quality Product



Supply format

REMS REG 10–42. Outer-inner pipe and tube deburrer for manual or electric operation. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 10-42 mm, Ø $\frac{1}{2}-1\frac{5}{8}$ ". Without adapter for electric drive. In blister pack.

€	ArtNo.	
121,45	113810R	



Description	ArtNo.	€
Adapter for REMS REG 10 – 42	113815R	52,11
DEMS Halix 22V VE cordless drill/scrawdriver see na	ao 108	



Robust quality tool for removing outer and inner burr from pipes.

Stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes

Ø 10 – 54 mm Ø ½ – 21/8"

REMS REG 10-54 – the multiple edge up to Ø 54 mm.

Easy, effortless deburring through multiple blades which are specially hardened and ground.

Robust metal design for tough use.



Supply format

REMS REG 10–54. Outer-inner pipe and tube deburrer. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 10-54 mm, Ø 10-54 mm, Ø 10-54 mm, Ø 10-54 mm,

€	ArtNo.	
76,19	113830R	



Outer-inner pipe deburrer

REMS REG 10 – 54 E

Robust quality tool for removing outer and inner burr from pipes. For manual operation or electric drive.

Stainless steel pipes, other steel pipes, copper, brass, aluminium,

plastic pipes

Ø 10 – 54 mm Ø ½ – 21/8"

REMS REG 10 – 54 E – by hand or electrically. Especially for stainless steel pipes.

Easy, effortless deburring through multiple blades which are specially hardened and ground.

Integrated hexagonal driver for electrical drive by REMS Helix 22 V VE cordless drill/screwdriver (page 108) and other power drills/screwdrivers with $\frac{1}{2}$ " bit holders (speed \leq 300 rpm), by the REMS Cento or REMS Cento 22 V pipe cutting machine (page 84–87) and by the REMS Turbo Cu-INOX pipe circular sawing machine (page 70) (Patent EP 2 058 067).

Robust metal design for tough use.







Supply format

REMS REG 10–54 E. Outer-inner pipe and tube deburrer for manual or electric operation. For stainless steel pipes, other steel pipes, copper, brass, aluminium, plastic pipes, Ø 10-54 mm, Ø $\frac{1}{2}-2\frac{1}{8}$ ". In blister pack.

€	ArtNo.			
140,13	113835R			



Accessories

Description	
DEMC II. II.	,

REMS Helix 22 V VE, cordless drill/screwdriver, see page 108

REMS Cento, pipe cutting machine, see page 84

REMS Cento 22 V, cordless pipe cutting machine, see page 86

 $\textbf{REMS Turbo Cu-INOX,} \ pipe \ circular \ sawing \ machine, \ see \ page \ 70$

Robust, quality tool for calibration and outer-inner deburring of pipes. For manual operation or electric drive.

Multi-layer composite tubes

Ø 14-63 mm

REMS KaliGrat E – simultaneous calibration and outer-inner deburring. Ratchet handle with changeable calibrating and deburring heads, with quick-change holder.

Universally usable for calibration after the cutting/cropping process, for inner deburring, to avoid damaging the fitting 0-ring and for outer deburring.

Easy handling and fast feeding due to ergonomically designed plastic handle with ratchet function.

Robust steel version of the calibrating mandrel with integrated deburring blades for heavy-duty applications and long life. The calibrating mandrel and deburring blades are adapted to different pipe dimensions and wall thicknesses. Sturdy sleeve for protecting the calibrating mandrel and deburring blades from damage.

All calibrating and deburring heads with integrated hexagonal connection for manual operation with the REMS KaliGrat E ratchet handle or for electrical drive by the REMS Helix 22V VE cordless power drill/screwdriver (page 108) and other power drills/screwdrivers with $\frac{1}{2}$ " bit holders (speed $\leq 500 \, \text{min}^{-1}$).

Quick calibrating and deburring head change by ratchet handle with quick-change holder with spring locking.





Supply format

REMS KaliGrat E Set. Calibrating tool and outer-inner pipe deburrer, for manual operation or electric drive. For \emptyset 14–63 mm composite tubes. Ratchet handle with quick-change holder with spring locking, calibrating and deburring heads. In sturdy case.

iii staray case.		
Version Ø mm × wall thickness mm	ArtNo.	€
Set 16×2+20×2+25×2.5/26×3	114000R	341,30
Set Allround 26		
14×2+16×2+16×2.25+18×2+20×2+20×2.25+	11/, 001 R	434 NN







Description	ArtNo.	€	
REMS KaliGrat E ratchet handle, with quick-change			
holder, for easy driving of the REMS KaliGrat E			
calibrating and deburring heads	114044R	80,00	
REMS KaliGrat E Ø 14×2 mm	114032R	50,70	
REMS KaliGrat E Ø 16×2 mm	114033R	60,00	
REMS KaliGrat E Ø 16×2.25 mm	114034R	60,00	
REMS KaliGrat E Ø 18×2 mm	114035R	56,00	
REMS KaliGrat E Ø 20×2 mm	114036R	64,00	
REMS KaliGrat E Ø 20×2.25 mm	114037R	64,00	
REMS KaliGrat E Ø 20×2.5 mm	114038R	64,00	
REMS KaliGrat E Ø 25×2.5/26×3 mm	114039R	75,10	
REMS KaliGrat E Ø 32×3 mm	114040R	92,00	
REMS KaliGrat E Ø 40×3.5 mm	114041 R	118,20	
REMS KaliGrat E Ø 50×4 mm	114042R	168,00	
REMS KaliGrat E Ø 63×4.5 mm	114043R	308,90	
Case with inlay	114030R	62,20	
REMS Helix 22V VE, cordless drill/screwdriver, see page 108			



Robust, quality tools for calibration and inner deburring of pipes.

Multi-layer composite tubes


Ø 16-63 mm

REMS KaliGrat R – simultaneous calibration and inner deburring. Ratchet handle with graduated calibrating mandrel with integrated deburring blades.

Universally usable for composite tubes for calibration after the cutting/cropping process and for inner deburring, to avoid damaging the fitting 0-ring.

Easy handling and fast feeding due to ergonomically designed plastic handle with ratchet function.

Robust steel version of the calibrating mandrel with integrated deburring blades for heavy-duty applications and long life. The graduated calibrating mandrel and deburring blades are adapted to different pipe dimensions and wall thicknesses.

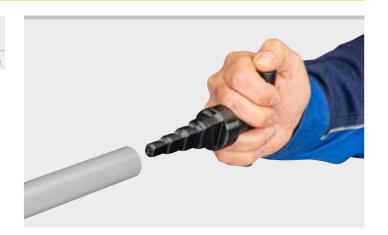

Supply format

REMS KaliGrat R. Calibrating tool and inner pipe deburrer. For \emptyset 16–63 mm composite tubes. Ratchet handle with calibrating mandrel for different diameters and wall thicknesses, with integrated deburring blades. In blister pack.

Version Ø mm × wall thickness mm	ArtNo.	€
R4 16×2+20×2+25×2.5/26×3+32×3	114045R	97,80
R4 16×2+20×2.25+25×2.5/26×3+32×3	114046R	97,80
R3 40×3.5 + 50×4 + 63×4.5	114047R	195,60
R3 40×4 + 50×4.5 + 63×6	114048 R	195,60



REMS KaliGrat H

Calibrating tools and outer-inner pipe deburrers

Robust, quality tools for calibration and outer-inner deburring of pipes.

Multi-layer composite tubes

Ø 16-26 mm

REMS KaliGrat H – simultaneous calibration and outer-inner deburring. Star handle with calibrating mandrels and deburring blades.

Universally usable for calibration after the cutting/cropping process, for inner deburring, to avoid damaging the fitting 0-ring and for outer deburring. One product for several pipe sizes.

Easy handling and fast feeding due to ergonomically designed plastic housing with star handle.

Robust steel version of the calibrating mandrel with integrated deburring blades for heavy-duty applications and long life. The calibrating mandrel and deburring blades are adapted to different pipe dimensions and wall thicknesses. Sturdy sleeve for protecting the calibrating mandrel and deburring blades from damage.



Supply format

REMS KaliGrat H. Calibrating tool and outer-inner pipe deburrer. For composite tubes. In blister pack.

Version Ø mm × wall thickness mm	ArtNo.	€
16×2+20×2+26×3	114060 R	115,60
16×2+20×2+25×2.5	114061 R	115,60





Assembling

	Water pump pliers	104
AT.	Pipe workstation Chain pipe vices	105
M	Folding workbenches	106
	Material supports	107
	Cordless power drill/screwdriver	108
	Electric LED flood light Cordless LED flood light	110

Rugged quality tools for tough use and long service life. All-steel, drop forged.

Swedish model according to DIN 5234 - Form C.

Pipes $\leq \emptyset$ 3" Nuts, bolts, flat material

REMS Catch S - for professional use.

Swedish model with S-shaped jaws for secure 3-point grip. Self-locking thus secure gripping and holding even on smooth pipes.

Rugged design in chrome-vanadium steel, all steel, drop forged, tempered, powder-coated. Hardened, highly wear resistant toothing.

Ergonomically shaped handle, slip-proof. Stop prevents jamming. Adjusting nut cannot be lost. Reinforced sleeve.



Supply format

REMS Catch S. Swedish pattern wrench 'S'. DIN 5234 – Form C.

In plastic bag.

Description Pipes ≤ Ø inch	Width mm	ArtNo.	€
S 1/2"	36	116000R	51,80
S 1"	47	116005R	55,53
S 1½"	60	116010R	74,53
S 2"	78	116015R	99,44
S 3"	112	116020R	199,30



REMS Catch W

Rugged quality tools for tough use and long service life. All-steel, drop forged.

According to ISO 8976 with box joint.

Pipes ≤ Ø 1½" Square, hexagonal joints, flat material

REMS Catch W - for professional use.

Gripping pliers with reinforced, ground, box joint. 7 grip positions. Self-locking thus secure gripping and holding, even on smooth pipes.

Rugged design in chrome-vanadium steel, all-steel, drop forged, tempered, powder-coated. Hardened, highly wear resistant toothing.

Ergonomically shaped handle, slip-proof. Stop prevents jamming.

Water pump pliers



Supply format

REMS Catch W. Water pump pliers, 7 grip positions. ISO 8976.


In plastic bag.

practic bag.			
Description	Pipes ≤ Ø inch	ArtNo.	€
W 175	1"	116050R	25,43
W 240	11/4"	116055R	29,27
W 300	11/2"	116060R	43,08



Sturdy, easy to carry pipe workstation with integrated chain pipe vice on folding tripod stand. With practical shelf plate. For trade and industry. For the building site and the workshop.

Clamping range \emptyset 10 – 165 mm \emptyset 1% – 6" Load capacity \leq 450 kg



Sturdy, torsion-free die-cast structure of the work plate with integrated chain pipe vice, pipe rest, tool holders, 3 benders for bending pipes Ø 10-26 mm, Ø %-%", clamping head.

Specially toothed double clamping jaws, easily changeable, prism-shaped, for safe clamping of the pipes in the whole working range. Specially hardened, for long life.

Clamping chain with strong chain links, easy clamping by quick closure and trapezoidal threaded spindle.

Well accessible working range in front of the chain pipe vice for free swing of even long tools.

Especially suitable for pipe installation, e.g. for cutting, thread cutting, bending, assembly.

Adjustable clamping head for clamping the pipe workstation between the ceiling and the floor, for especially secure standing.

Proven tripod stand for secure standing, folding, for easy erection and transport. Practical shelf plate for tools and work material.

REMS Herkules height adjustable material supports (see page 107).



REMS Aquila 3B. Pipe workstation with chain pipe vice for clamping pipes, solid material \emptyset 10–165 mm, \emptyset %–6". Work plate with integrated chain pipe vice with double clamping jaws, pipe rest, tool holders, 3 benders for bending pipes \emptyset 10–26 mm, \emptyset %–3", clamping head. Folding tripod stand with shelf plate. Load capacity \le 450 kg. In a carton.

ArtNo.	€
120270R	529,38













Chain pipe vice for workbench

High quality, robust chain pipe vice for fixing to a workbench.

REMS Aquila WB

Excellent quality for long life. For trade and industry.
For the building site and the workshop.

Clamping range \emptyset 10 – 165 mm \emptyset 1/8 – 6"

REMS Aquila WB - safe clamping of pipes up to 6".

Sturdy, torsion-free die-cast structure of the base plate with integrated chain pipe vice, pipe rest, bender.

Specially toothed double clamping jaws, easily changeable, prism-shaped, for safe clamping of the pipes in the whole working range. Specially hardened, for long life.

Clamping chain with strong chain links, easy clamping by quick closure and trapezoidal threaded spindle.

Well accessible working range in front of the chain pipe vice for free swing of even long tools.

Especially suitable for pipe installation, e.g. for cutting, thread cutting, bending, assembly.

For fixing to the workbench. Pay attention to load capacity of the workbench. REMS Herkules height adjustable material supports (see page 107).











Supply format

REMS Aquila WB. High quality chain pipe vice for clamping pipes, solid material \emptyset 10–165 mm, \emptyset %–6". Base plate with integrated chain pipe vice with double clamping jaws, pipe rest, bending device. For work bench. In a carton.

ArtN	0. €
12025	R 310.36



Sturdy, easy to carry folding workbenches for universal use. Worktop in accordance with DIN 68 705. For trade and industry. For the building site and the workshop.

REMS Jumbo E - handy and light.

REMS Jumbo – the indestructible folding workbench. Handy and light. German quality product.

REMS Jumbo – assembled and disassembled at lightning speed. With toggle catch. Worktops in accordance with DIN 68 705. Highly resistant up to 300 kg.

Handy and light. REMS Jumbo E only 23 kg, REMS Jumbo only 28 kg.

Worktop made of special Birch-Multiplex plywood (REMS Jumbo E) or Beech-Multiplex plywood (REMS Jumbo), in accordance with DIN 68 705 weather-proof glued, impregnated, vice-proof and tear-proof, flat and torsion-free.

Impact and splinter resistant thanks to steel edge protection. Screws and nuts galvanised, $\,$

Especially safe standing by strong tubular steel frame with toggle catch, assembled and disassembled at lightning speed. Easy to carry.

Highly resistant, max. load capacity 300 kg.



German Quality Product







Supply format

REMS Jumbo. Folding workbench with toggle catch. Worktop in accordance with DIN 68 705. Load capacity \leq 300 kg. In a carton.

Description	Work top	Size mm	ArtNo.	€
REMS Jumbo E	Birch-Multiplex	800×600	120240R	289,60
REMS Jumbo	Beech-Multiplex	1100 × 700	120200R	445.30

Vertically adjustable material support with roller guidance for rotating and stationary pipe and solid material. For trade and industry. For the building site and the workshop.

Pipes, solid material \emptyset (1/8) 3/4 - 6", \emptyset (6) 26 - 168 mm Load capacity ≤ 150 kg

REMS Herkules - the sturdy support.

Easy moving of the material in all directions when turning, pulling and pushing by two stainless steel balls mounted in a rust-protected housing in the range 0 % -6", 0 26–168 mm.

Especially suitable for pipe installation, e.g. for cutting, thread cutting, roll grooving, welding, soldering.

Robust, job site-proven design. Dismantles for transport and stocking.

Optionally on safe standing tripod or with clamping device for workbench.

Height adjustable, REMS Herkules 3B from $690\ to\ 1{,}180\ mm$ from the floor, REMS Herkules Y from 35 to 580 mm from the workbench surface.

Supply format

REMS Herkules. Vertically adjustable material support for pipes, solid material Ø ($\frac{1}{2}$) $\frac{3}{4}$ -6", Ø (6) 26 – 168 mm. Optionally on tripod or with clamping device for workbench. Load capacity \leq 150 kg. In a carton.

Description	Version	ArtNo.	€
REMS Herkules 3B	Tripod with protection caps	120120R	334,24
REMS Herkules Y	Clamping fixture for work bench	120130R	201,37




German Quality Product











Height adjustable material support with ball guide for rotating and standing tubular and solid material. For trade and industry. For the building site and the workshop.

Pipes, solid material \emptyset (%) 1% – 12", \emptyset (6) 42 – 324 mm Load capacity \leq 450 kg

REMS Herkules XL 12" – extra stable for pipes up to 12".

Especially suitable for pipe installation, e.g. for roll grooving, cutting, thread cutting, welding, soldering.

Easy moving of the material in all directions when turning, pulling and pushing by two stainless steel balls mounted in a rust-protected housing in the range 0 1%-12", 0 42-324 mm.

Robust, job site-proven design. Securely standing tripod, folds up for transport and storage.

Height adjustable from 505 to 915 mm from the floor.

Threaded spindle for simple alignment of the pipe, with fixing device.


Practical handle for easy transport.

Supply format

REMS Herkules XL 12". Height adjustable, fold-up for pipes, solid material $\emptyset \ 1\% - 12$ ", $\emptyset \ 42 - 324$ mm. Load capacity ≤ 450 kg. In a carton.

	5 174 12 , 5 42 324 mm. Load capacity 2 430 kg. m a carton.			
€	ArtNo.			
362.26	120125R			





Powerful, mobile, handy power tool for drilling, driving in/loosening screws and deburring pipes. For assembly, disassembly, repair. Li-lon 22 V Technology. For battery and corded operation.

Drilling in steel, stone	≤ Ø 13 mm
Drilling in wood	≤ Ø 32 mm
Drilling with tile drills, e.g. in ceramic,	
fine clay, granite, marble	≤ Ø 14 mm
Driving in/loosening of screws	≤Ø8mm

REMS Helix 22V VE – drilling, screw riving and deburring. With powerful, brushless battery motor.

Design

Ultra light, ultra small, ultra handy. Drive machine with battery pack weighs only 1.6 kg. Can therefore be used everywhere, free hand, over head, also in very confined spaces. Optimum weight distribution for one-hand operation. Ergonomically designed housing. Drive machine with keyless quick chuck, clamping range 1.5–13 mm, right and left hand rotation. 2 continuously adjustable speed ranges from 0 to 560 rpm and 0 to 1,900 rpm, 15 torque stages plus drilling stage, hard torque of 50 Nm in both speed ranges, soft torque of 12 Nm in the fast and 30 Nm in the slow speed range for powerful screwdriving. Integrated LED work light for illuminating the work place. Belt clip. For cordless and mains operation. 1 bit with double blade slot/cross-head, 50 mm long. Bit set as accessory.

Drive

Powerful electro-mechanical drive with powerful, brushless battery motor 21.6V, 500W output, robust, 2-step, precision, ball bearing-mounted gear, maintenance-free. Safety switch.

Vario-Electronic

Continuous electronic speed control for gentle start drilling, driving in/loosening of screws and selection of the speed suitable for the material when drilling and driving in/loosening screws. The speed can be continuously controlled by variable pressure on the safety switch from 0 to 560 rpm or 0 to 1,900 rpm (accelerator switch (VE)).

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 1.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. $220-240\,\text{V}/21.6\,\text{V}$, 15 A output, voltage supply for mains operation instead of Li-lon battery 21.6 V, as accessory.











REMS Helix 22 V VE Set. Cordless power drill/screwdriver with Vario-Electronics (VE) for drilling in steel, stone, $\leq \emptyset$ 13 mm, wood $\leq \emptyset$ 32 mm and other materials and for driving in/loosening screws $\leq \emptyset$ 8 mm. Drive machine with keyless quick chuck, clamping range 1.5-13 mm, right and left hand rotation. Electromechanical drive with powerful, brushless battery motor 21.6 V, 500 W, 2-step robust gear. 2 continuously adjustable speed ranges from 0 to 560 rpm and 0 to 1,900 rpm, 15 torque stages plus drilling stage, hard torque of 50 Nm in both speed ranges. Safety switch. Integrated LED work light. Belt clip. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220 – 240 V or 110 V, 50 – 60 Hz, 70 W. 1 bit with double blade slot/cross-head, 50 mm long. In carrying bag.

ArtNo.	€
190110R220	499,00

Other voltages on request.



Accessories

Description	ArtNo.	€
REMS REG 10 – 42. Outer/inner pipe deburrer for pipes Ø Ø $\frac{1}{2}$ – 15%", see page 98	10 – 42 mr	n,
REMS REG 10-54 E. Outer/inner pipe deburrer for pipes Ø $\frac{1}{2}$ - 2 $\frac{1}{8}$ ", see page 99	Ø 10–54 r	nm,
REMS KaliGrat E. Calibrating tool and outer-inner pipe defor multi-layer composite tubes Ø 14 – 63 mm, see page 1		
REMS tile drilling, Ø 5-14 mm, see page 320		
REMS Helix 22 V VE drive unit, without battery	190100R22	239,00
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A, for mains operation instead of battery Li-lon 21.6 V.	571567 R220	414,16
Carrying bag	190053R	46,71
Bit set , comprising quick-change bit holder, magnetic, with automatic bit lock, 12 bits (4 Torx, 3 cross-head PH, 3 cross-head PZ, 2 slotted), in practical magazine with elastic hand for fixing to wrist or to the power tool	190051 R	15,88
3 cross-head PZ, 2 slotted), in practical magazine with elastic band for fixing to wrist or to the power tool. REMS Lumen 2800 22V. cordless LED flood light, see particular	190051R de 111	15,8



Powerful, electric LED flood light with high light intensity. For the building site and the workshop.

	REMS Lumen 5000	
	Light flux	5000 lm
	REMS Lumen 7000	
ı	Light flux	7000 lm
	REMS Lumen 10000	
	Light flux brightness stage 1	5000 lm
	Light flux brightness stage 2	10000 lm

REMS Lumen 5000/7000/10000 – electric lighting. With high light intensity. Handy, light. Continuous swivel.

Universal use

Powerful, mobile, electric LED flood light with high light intensity for universal use on the building site or in the workshop. REMS Lumen 10000 with 2 selectable brightness stages for any application purpose.

Design

Handy, light, electric LED flood light. REMS Lumen 5000 only 1.8 kg, REMS Lumen 7000 only 2.2 kg, REMS Lumen 10000 only 3.0 kg. Impact-resistant aluminium housing, dust-proof, protected against water jets from all directions. LEDs protected by impact-resistant, unbreakable acrylic glass. Flood light housing swivels through 360°, fixable by star grips, for optimum alignment of the light. On/Off switch. Tubular steel frame with rubber feet for a firm stand. Practical, non-slip handle. Practical, sturdy, telescopic tripod stand, only 1.9 kg, for accurate positioning of the LED flood light, adjustable height from 615 to 1,590 mm above floor level, collapsible for easy transport, as an accessory.

LED flood light

Modern, energy-saving LED flood light with high light intensity. Lights immediately without switch-on delay. Brightness of the LEDs in REMS Lumen 10000 selectable in 2 stages. 120° radiation angle for good illumination. Colour temperature 5,000 K. Efficient heat dissipation by high-quality, aluminium, ribbed heat sinks. Overheating regulates the power supply automatically, for continuous operation.









Supply format

REMS Lumen. Electric LED flood light with high light intensity. 230 V, $50-60\,\text{Hz}$. 5 m connecting lead. In a carton.

Description	Light flux ≤lm	Power ≤W	ArtNo.	€
Lumen 5000	5000	50	175220 R220	82,00
Lumen 7000	7000	70	175221 R220	98,61
Lumen 10000	10000	100	175222R220	123,52

Other voltages on request.

Accessories

Description	ArtNo.	€
REMS 3B telescopic stand, on a tripod,		
height-adjustable, collapsible	175230R	31,04



Powerful, mobile cordless LED flood light with high light intensity. Li-lon 22 V Technology. For battery and corded operation. For the building site and the workshop.

Light flux brightness stage 1 1100 lm Light flux brightness stage 2 2000 lm Light flux brightness stage 3 2800 lm

REMS Lumen 2800 22V – lights everywhere. With high light intensity. Mobile, handy, light. For battery and corded operation. Continuous swivel.

Universal use

Powerful, mobile, cordless LED flood light with high light intensity for universal use on the building site or in the workshop. 3 selectable brightness stages, ideal for any application purpose.

Design

Handy, lightweight, cordless LED flood light, only 1.7 kg, with battery only 2.1 kg. Impact-resistant plastic housing. LEDs protected by impact-resistant, unbreakable acrylic glass. Flood light housing swivels through 360° , fixable by wing nuts, for optimum alignment of the light. On/Off switch. Tubular steel frame with plastic plate and pluggable hook, for fastening or hanging the flood light. Practical, non-slip handle. $220-240\,\text{V}$, $50-60\,\text{Hz}$, $138\,\text{W}$ power supply, for mains operation included. Holder for REMS Li-lon 21.6 V integrated into the housing for cordless instead of mains operation. In cordless operation with Li-lon 21.6 V, 2.5 Ah, 54Wh (output). Practical, sturdy, telescopic tripod stand, only 1.9 kg, for accurate positioning of the LED flood light, adjustable height from 615 to 1,590 mm above floor level, collapsible for easy transport, as an accessory.

LED flood light

Modern, energy-saving LED flood light with high light intensity. Lights immediately without switch-on delay. LED brightness selectable in 3 stages. 120° radiation angle for high illumination. Colour temperature 6,500 K. Efficient heat dissipation by high-quality, aluminium, ribbed heat sinks prevents overheating. For continuous operation.

Battery or mains operation

Li-lon 22 V Technology. Highly resistant Li-lon 21.6 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Graduated charging status check by coloured LEDs. Operating temperature range $-10\ to +60\ ^{\circ}\text{C}$. No memory effect for maximum battery power. Rapid charger 100-240V, 90W. Rapid charger 100-240V, 290W, for shorter charging times, as accessory.

Description		Operating hours h	*
	Stage 1	Stage 2	Stage 3
Battery Li-lon 21.6V, 2.5 Ah	5.4	2.4	1.6
Battery Li-lon 21.6 V, 4.4 Ah	9.6	4.2	2.8
Battery Li-lon 21.6 V, 5.0 Ah	10.9	4.8	3.2
Battery Li-Ion 21.6 V, 9.0 Ah	19.6	8.6	5.7

Supply format

REMS Lumen 2800 22V Set Power-Edition. Cordless LED flood light with high light intensity. For battery and corded operation. Light flux ≤ 2800 lm. Voltage supply 220 – 240 V, 50 – 60 Hz, 138 W. Without battery, without rapid charger.

iii a cartoii.		
	ArtNo.	€
	175210R220	144,28

Other voltages on request.

Supply format

REMS Lumen 2800 22V Set. Cordless LED flood light with high light intensity. For battery and corded operation. Light flux \leq 2800 lm. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220–240 V or 110 V, 50–60 Hz, 70 W. Voltage supply 220–240 V, 50–60 Hz, 138 W. In a carton.

o. (ArtNo.	
20 455,68	175211 R220	

Other voltages on request.

Accessories

Description	ArtNo.	€
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587 R220	414,16
REMS 3B telescopic stand, on a tripod, height-adjustable, collapsible	175230R	31,04








111





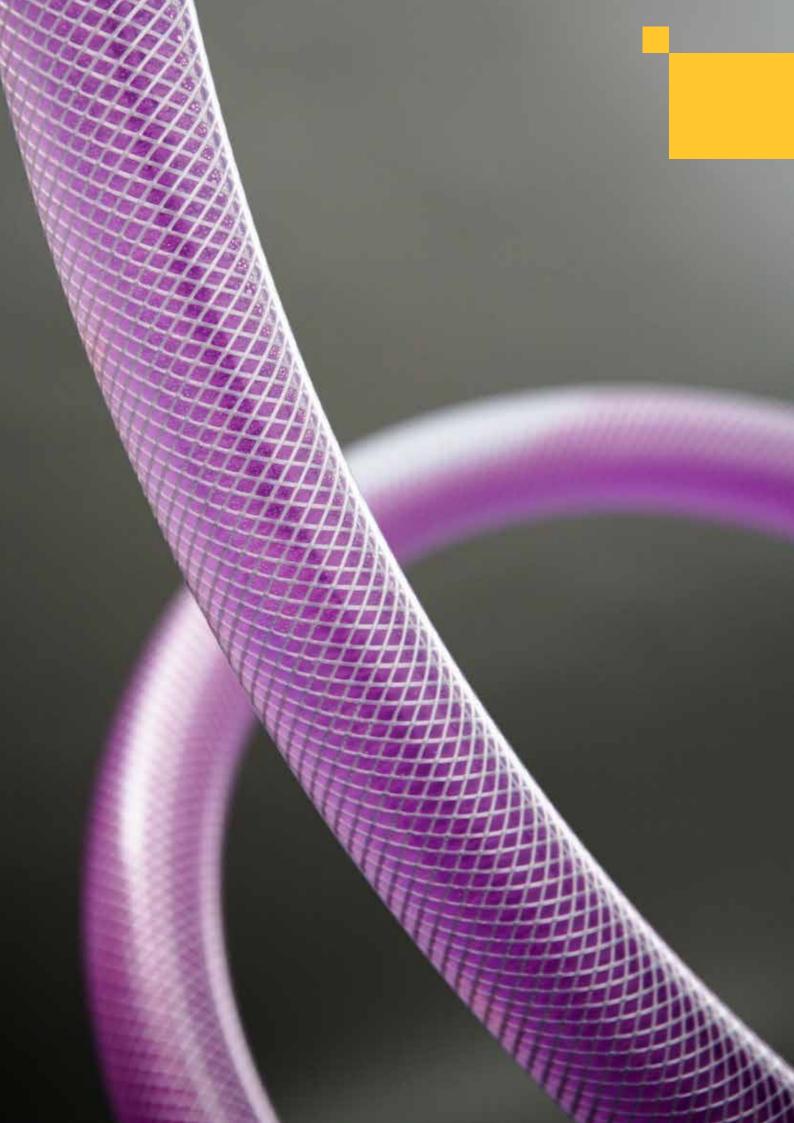

Pressure testing Cleaning Disinfecting Preserving Flushing Filling

Sent Sent	Hand pressure testing pump	114
	Electric pressure testing pump	115
	Electric decalcifying pump	116
	Electronic flushing unit with compressor	117
	Electronic flushing and pressure testing unit with compressor	120
O COMPANY	Disinfection unit TW, cleaning and preservation unit H	123
200	Machine cleaner	123
	Electric filling and flushing unit	124

Proven, reliable testing pump for pressure and tightness tests of piping systems and receptacles.

Testing and pressure range	≤ 6 MPa/60 bar/870 psi
Water, oil, glycol	
pH-value of liquids	7 – 12
Temperature of liquids	≤ 60°C
Viscosity of liquids	≤ 1.5 mPa s

REMS Push - reliable pressure hold.

Universal use

For plumbing, heating, solar system and sprinkler installations, for compressed air, steam and cooling systems, oil installations, for boiler and pressure vessel building.

Design

Robust, job-site proven metal design for tough use. REMS Push with corrosion-resistant, powder-coated 12 ltr steel tank. Distortion resistant lever with ergonomic handle, doubles as carrying handle when locked. Wear resistant pressure piston in brass, Ø 30 mm. High-pressure hose with $\frac{1}{2}$ "-connection. Fine scale pressure gauge (accessory), p \leq 1.6 MPa/16 bar/232 psi, for reading a pressure change of 0.01 MPa/0.1 bar/1.45 psi for tightness testing according to DIN 1988, as accessory.

Stainless steel tank

REMS Push INOX with 12 ltr stainless steel tank. For extremely long life.

Functioning

Pressure and tightness test with water or oil. Double valve system for reliable pressure built-up, with rust-proof steel balls. High pumping capacity with long stroke, fine pressure adjustment at short pushes. High pressure hose with fabric ply prevents measurement errors.





Supply format

REMS Push. Hand pressure testing pump with pressure gauge, $p \le 6$ MPa/60 bar/870 psi, for pressure and tightness testing of piping systems and receptacles up to 6 MPa/60 bar/870 psi, Corrosion-resistant, powder-coated 12 ltr steel tank. 1.5 m high-pressure hose with ½"-connection. In a carton.

€	ArtNo.
278.18	115000R



Supply format

REMS Push INOX. Hand pressure testing pump with pressure gauge, $p \le 6$ MPa/60 bar/870 psi, for pressure and tightness testing of piping systems and receptacles up to 6 MPa/60 bar/870 psi. 12 ltr stainless steel tank. 1.5 m high-pressure hose with $\frac{1}{2}$ "-connection. In a carton.

€	ArtNo.	
358.11	115001 R	



Accessories

Description	Pressure p ≤ MPa/bar/psi	ArtNo.	€
Connecting piece with pressure			
gauge and shut off valve	6/60/870	115110R	123,52
Fine scale pressure gauge	1.6/16/232	115045	79,61





Powerful, electric pressure testing pump for pressure and tightness tests of piping systems and receptacles.

Testing and pressure range	≤ 6 MPa/60 bar/870 psi
Pumping capacity	6.5 l/min
Water, hydrous solutions, emul	lsions
pH-value of liquids	7 – 10
Temperature of liquids	≤ 60°C
Viscosity of liquids	≤ 1.5 mPa s

REMS E-Push 2 – electric charging and testing. Up to 60 bar. With adjustable pressure limiting. 1300 W. Self sucking.

Universal use

In sanitary, heating, solar and sprinkler installation, for compressed air, steam and cooling systems, oil installations, in boiler and pressurised vessel construction.

Design

Robust, compact, light. Weighs only 10 kg. Easy to carry. Wear reduced high power piston pump. Pressure gauge, damped by filling with glycerine, p \leq 6 MPa/60 bar/870 psi. High-pressure hose with fabric ply prevents measurement errors. Suction hose with suction filter. Non-return valve in the suction hose prevents the suction hose from running empty in standstill times; therefore shorter suction times. Suction hose and high pressure hose with ½"-connection. Connecting piece with pressure gauge, p \leq 6 MPa/60 bar/870 psi, and shut off valve for pressure and tightness testing also after removal of the high pressure pump, e.g. theft protection or for use at several testing points, as accessory. Fine scale pressure gauge, p \leq 1.6 MPa/16 bar/322 psi, for reading a pressure change of 0.01 MPa/0.1 bar/1.45 psi for tightness testing according to DIN 1988, as accessory.

High power piston pump

Self-sucking high power piston pump running in a sealed oil bath with wear reduced pressure piston in stainless steel. Proven, powerful capacitor motor, 1300 W, very powerful and fast. High pumping capacity of 6.5 l/min. Pressure and tightness testing up to 6 MPa/60 bar/870 psi.

Adjustable pressure limiting

Pressure limiting in 6 stages, 1-6 MPa/10-60 bar/145-870 psi, adjustable to the necessary pressure in the pipe system/tank.







Supply format

REMS E-Push 2. Electric pressure testing pump with pressure gauge, $p \le 6$ MPa/60 bar/ 870 psi, for pressure and leak testing of pipe systems and tanks up to 6 MPa/60 bar/870 psi, with adjustable pressure limiting. Pump unit with capacitor motor 230 V, 50 Hz, 1300 W. 1.5 m suction hose with ½" connection and gaskets, suction filter with non-return valve. 1.5 m high-pressure hose with ½" connection and gaskets. In a carton.

72 connection and gaskets. In a carton.		
	ArtNo.	€
	115500 R220	943,54

Accessories

Description	Pressure p ≤ MPa/bar/psi	ArtNo.	€
Connecting piece with pressure gauge and shut off valve	6/60/870	115110R	123,52
Fine scale pressure gauge	1.6/16/232	115045	79,61







Powerful, electric decalcifying pump for effective decalcifying of pipes and containers, e.g. flow heaters, boilers, hot water tanks, cold water tanks, heat exchangers, heating and cooling systems.

Useful container volume	21 l
Displacement	≤ 30 l/min
Displacement pressure	≤ 0.1 MPa/1.0 bar/15 psi
Transport height	≤ 10 m
Temperature of decalcifying s	solution ≤ 50°C

REMS Calc-Push – effective electric decalcifying. High displacement. 3-way lever for reversal of flow direction, with zero setting.

Universal use

For effective decalcifying of pipes and containers, e.g. flow heaters, boilers, hot water tanks, cold water tanks, heat exchangers, heating and cooling systems.

Design

Robust, compact, light, weights just 9.2 kg. Impact-proof plastic container for the decalcifying solution, useful container volume 21 l, with practical screw-on cap for closing the plastic container during transport. Flexible ½", 2.3 m long flexible PVC fabric hoses, with hose screw fittings with Rp ½" female thread and caps. 3-way lever for reversing the flow direction to remove even heavy lime deposits from both sides, with zero setting to interrupt the flow. Easy to carry due to centrally arranged handle with practical hose holders.

Unscrewable pump unit

Compact pump unit, consisting of a centrifugal pump and condenser motor, unscrewable, for easy cleaning of the pump unit and the plastic container after the decalcifying process. Self-sucking centrifugal pump, suitable for different decalcifying solutions of acetic acid, sulphuric acid, citric acid, formic acid, phosphoric acid, sulfamic acid. With proven, powerful condenser motor with quiet running, 165 W, on/off switch. High displacement ≤ 30 l/min for effective decalcifying.





Supply format

REMS Calc-Push. Electric decalcifying pump for effective decalcifying of pipes and containers, e.g. flow heaters, boilers, hot water tanks, cold water tanks, heat exchangers, heating and cooling systems. Displacement ≤ 30 l/min, useful container volume 21 l. Pump unit with condenser motor 230 V, 50 Hz, 165 W. Displacement pressure ≤ 0.1 MPa/1.0 bar/15 psi. Transport height ≤ 10 m. Flexible $\frac{1}{2}$ ", 2.3 m long flexible PVC fabric hoses, with hose screw fittings with Rp $\frac{1}{2}$ " female thread and caps. 2 double nipples $\frac{3}{2}$ " $-\frac{1}{2}$ ", 2 double nipples $\frac{1}{2}$ " in a carton.

/2	/4 . III a carton.		
		ArtNo.	€
		115900R220	829.36

Other voltages on request.



Powerful, compact, electronic flushing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems and for operation of pneumatic tools.

Flushing and desilting

Water pressure pipe network $p \le 1 \text{ MPa}/10 \text{ bar}/145 \text{ psi}$ Pipe diameter installation $\le DN 50, 2$ "

Disinfection of drinking water installations

Cleaning and preservation of radiators and area heating systems

Water temperature $5-35^{\circ}$ C Water flow $\leq 5 \text{ m}^3/\text{h}$

Operation of pneumatic tools

Operating pressure $p \le 0.8 \text{ MPa/8 bar/116 psi}$ Suction rate $\le 230 \text{ Nl/min}$

REMS Multi-Push S – Flushing with water or a water/air mixture. Easy switching of the air supply during the flushing process when desilting. Permanent process monitoring. Logging. USB interface.

Universal use

Only **one** device for flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, e.g. for desilting, cleaning and preservation of radiators and area heating systems, flushing and disinfection of drinking water installations in accordance with EN 806-4:2010 and for operating pneumatic tools.

Design

Powerful, compact, electronic flushing unit with oil-free compressor. Handy, easily portable, only 32 kg. Measuring and control devices for automatically running the flushing programs and for documenting the results. Safety devices for avoiding contamination of the pipe network by flow-back. Overpressure valve for pressure limiting. 5 µm condensation and particle filters. Large tubular steel frame as a compressed air tank. Two practical handles for easy carrying. Space-saving, folding handle grip for easy movement. Mobile tubular steel frame with two rubbertyred wheels for easy transport and 2 rubber feet for firm standing. Connecting cable with integrated personal protection switch (PRCD). 2 hooks for winding up the power cable. Captive seals for input and output of the REMS Multi-Push S to avoid contamination during transport and storage. Practical hood for protecting the machine during transport and storage as an accessory.

Compressor

Proven, powerful, oil-free piston compressor with crank drive, with capacitor motor 230V, 1500W. Pressure gauge for displaying the air pressure in the compressed air tank. Emergency stop button.

Hoses

Transparent Ø 1" suction/pressure hose, with fabric inlay, 1.5 m long, with 1" hose screw fittings, with caps, for flushing, disinfection, cleaning, preservation. Captive caps for the inputs and outputs of the hoses to avoid contamination during transport and storage. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and 1" hose screw fitting, 1" double nipple, for blowing out water remains from REMS Multi-Push S and suction/pressure hoses at the end of work.

Input and control unit

Easy desilting operation by buttons to switch over the air supply during the flushing process. Menu-guided input and menu-guided control for flushing drinking water installations according to EN 806-4:2010 with the possibility for the user to change the factory-set default values for adaptation to the applicable national safety provisions, rules and regulations for the application site. Format selection for date and time and selection of the different units. Input and control unit with 3" display with modern LCD technology, 76 mm screen diagonal, 128×64 pixels. Permanent process monitoring during the program sequences. USB port for USB stick or printer. The respective latest version software for the input and control unit is available via USB stick as a download under www.rems.de > Downloads > Software.







German Quality Product



Desilting and flushing

Buttons for easy switching of the air supply during the flushing process when desilting radiator and flat heater systems with the following possibilities: (1) without compressed air, (2) intermittent compressed air, (3) constant compressed air.

Flushing according to EN 806-4

Flushing of drinking water installations with water or with a water/air mixture with intermittent compressed air in accordance with EN 806-4:2010 and information leaflet "Flushing, Disinfection and Commissioning of Drinking Water Installations" (August 2014) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK).

Disinfection

REMS V-Jet TW disinfection unit for disinfection of drinking water installations in accordance with EN 806-4:2010 and information leaflet "Flushing, Disinfection and Commissioning of Drinking Water Installations" (August 2014) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK) and other pipe systems, as an accessory. REMS Peroxi Color, consisting of a 11 bottle of REMS Peroxi dosing solution for disinfection of approx. 1001 line volume and 20 ml bottle of red REMS Color dye for dyeing the dosing solution for filling and wash-out check, pipette for checking the effectiveness of the dosing solution, as an accessory. Feeding of the disinfectant solution without additional dosing pump (Patent EP 2 954 960).

Cleaning and preservation

REMS V-Jet H cleaning and preservation unit for cleaning and preserving radiators and area heating systems, as an accessory. Cleaner, dyed green for filling and wash-out check and corrosion protection, dyed blue for filling check, for approx. 100 I line volume respectively, as an accessory. Feeding of cleaner and corrosion protection without additional dosing pump (Patent EP 2 954 960).

Operation of pneumatic tools

Connection for pneumatic tools up to an air requirement ≤ 230 Nl/min, adjustable, for adaptation to the pneumatic tool being used. Pressure gauge for controlling the air pressure supplied by the compressed air tank. Pneumatic hose with quick coupling DN 7.2, as an accessory.

Logging


Results of the flushing programs are saved with date, time and log number in the selected language and can be transferred to USB stick or printer for documentation. Printer as an accessory. Additions to saved data, e.g. customer name, project number, tester, are possible on external devices (e.g. PC, laptop, tablet-PC, Smartphone).



Supply format

REMS Multi-Push S Set. Electronic flushing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, e.g. for desilting, cleaning and preservation of radiators and area heating systems, flushing and disinfection of drinking water installations and for operation of pneumatic tools ≤ 230 Nl/min. Input and control unit. Piston compressor with crank drive, capacitor motor 230 V, 50 Hz, 1,500 W, person circuit breaker (PRCD). Mobile tubular steel frame. Fastenings for water input and output of the REMS Multi-Push S. Two \emptyset 1" suction/pressure hoses, with fabric inlay, 1.5 m long, with 1" hose screw fittings, with caps. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and 1" hose screw fitting, 1" double nipple, for blowing out water remains from REMS Multi-Push S and suction/pressure hoses at the end of work. Without disinfection unit, without cleaning and preservation unit. In a carton

cteaning and preservation and the derion		
	ArtNo.	€
	115810R220	2.480,82





Description	ArtNo.	€
Fine filter with fine filter cartridge 90 μm, washable, with large dirt collection vessel	115609R	123,52
Fine filter cartridge 90 μm , for fine filter with fine filter cartridge 90 μm	043054	40,07
Compressed air hose Ø 14 mm, 1.5 m long, with quick couplings DN 7.2 (plug, socket), for connecting pneumatic tools	115621R	61,97
Ø 1" suction/pressure hose , with fabric inlay, 1.5 m long, with G 1" screw fittings for flushing, disinfection, cleaning, preservation and pressure testing with water.	115633R	59,27
Double nipple 1" , for connecting 2 suction/pressure hoses and blowing out the suction/pressure hoses	045159	10,38
Printer for printing the stored results of the flushing and test programs, 1 roll of paper, USB connecting cable, power supply/charger Ni-Mh $100-240 \text{ V}$, $50-60 \text{ Hz}$, 3 W	115604R	508,62
Paper roll, pack of 5 for printer	090015R	18,89
Case with inlays for printer, paper rolls and other accessories	115703R	70,58
REMS V-Jet TW, disinfection unit for drinking water installations, for feeding dosing solution for disinfection	115602R	304,13
REMS Peroxi Color, 11 bottle of REMS Peroxi dosing solution for disinfection of approx. 1001 line volume, 20 ml bottle of red REMS Color dye for dyeing the dosing solution for filling and wash-out check, pipette for checking the effectiveness of the dosing solution.	115605R	82,00
Test strips H_2O_2 0 – 1,000 mg/l, pack of 100,		
for checking the concentration of the disinfection solution	091072	71,21
Test strips H ₂ O ₂ O − 50 mg/l, pack of 100, for checking the complete flushing out of the disinfection solution after disinfection	091073	71,21
REMS V-Jet H, cleaning and preservation unit for radiators and area heating systems, for feeding cleaner and corrosion protection.	115612R	304,13
REMS CleanH 1 l bottle of cleaner for radiators and area heating systems, dyed green for filling and wash-out check, for approx. 100 l line volume.	115607R	57,09
REMS NoCor 1 l bottle of corrosion protection for preservation of radiators and area heating systems, dyed blue for filling check, for approx. 100 l line volume.	115608R	61,24
Hood for protecting the machine during transport and storage	115677 R	39,24
XL-Boxx system case for hoses	579600RMP	198,26



Powerful, compact, electronic flushing and pressure testing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, for pressure testing of pipe systems and vessels with compressed air or water, as a pneumatic pump for controlled filling of all types of vessels with compressed air and for operation of pneumatic tools.

Flushing and desilting

Water pressure pipe network p ≤ 1 MPa/10 bar/145 psi Pipe diameter installation ≤ DN 50, 2"

Disinfection of drinking water installations

Cleaning and preservation of radiators and area heating systems

5-35°C Water temperature Water flow $\leq 5 \text{ m}^3/\text{h}$

Pressure test

p ≤ 0.4 MPa/4 bar/58 psi with compressed air Pressure test with water p ≤ 1.8 MPa/18 bar/261 psi

Pneumatic pump for controlled filling of all types of $p \le 0.8 \text{ MPa/8 bar/116 psi}$ vessels with compressed air

Operation of pneumatic tools

 $p \le 0.8 \text{ MPa/8 bar/116 psi}$ Operating pressure Suction rate ≤ 230 Nl/min

REMS Multi-Push SL/SLW - just one device with more than 10 automatically running flushing and pressure testing programs. Permanent process monitoring. Logging. USB interface.

Universal use

Only one device for flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, for pressure testing of pipe systems and vessels with compressed air or water, e.g. drinking water installations, radiators or area heating systems, for pressure testing of gas installations with compressed air, as a pneumatic pump for controlled filling of all types of vessels with compressed air, e.g. for pumping up expansion vessels or tyres and for operating pneumatic tools. (Patent EP 2 816 231).

Design

Powerful, compact, electronic flushing and pressure testing unit with oil-free compressor. Handy, easily portable, REMS Multi-Push SL only 37 kg, REMS Multi-Push SLW only 39 kg. Measuring and control devices for automatically running the flushing and test programs and for documenting the results. Safety devices for avoiding contamination of the pipe network by flow-back. Overpressure valves for pressure limiting. $5~\mu m$ condensation and particle filters. Large tubular steel frame as a compressed air tank. Two practical handles for easy carrying. Space-saving, folding handle grip for easy movement. Mobile tubular steel frame with two rubbertyred wheels for easy transport and 2 rubber feet for firm standing. Connecting cable with integrated personal protection switch (PRCD). 2 hooks for winding up the power cable. Captive seals for inputs and outputs of the REMS Multi-Push SL/ SLW to avoid contamination during transport and storage. Practical hood for protecting the machine during transport and storage as an accessory.

REMS Multi-Push SLW additionally with hydro-pneumatic water pump for generating the necessary water pressure for hydrostatic pressure testing of pipe systems and vessels with water.

Compressor

Proven, powerful, oil-free piston compressor with crank drive, with capacitor motor 230 V, 1500 W. Pressure gauge for displaying the air pressure in the compressed air tank. Emergency stop button.

Hoses

Transparent Ø 1" suction/pressure hose, with fabric inlay, 1.5 m long, with 1" hose screw fittings, with caps, for flushing, disinfection, cleaning, preservation and pressure testing with water. High-pressure hose Ø ½", with fabric inlay, 1.5 m long, with 1/2" hose screw fittings, with caps, for pressure testing with water with REMS Multi-Push SLW. Captive caps for the inputs and outputs of the hoses to avoid contamination during transport and storage. Compressed air hose 08 mm, 1.5 m long, with quick coupling DN 5 and $\frac{1}{2}$ " hose screw fitting, for pressure testing with compressed air. Compressed air hose Ø8 mm, 1.5 m long, with quick coupling DN 5 (plug, socket) for gas testing with compressed air. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and 1' hose screw fitting, 1" double nipple, for blowing out water remains from REMS Multi-Push SL/SLW and suction/pressure hoses at the end of work.











German Quality Product

Input and control unit

More than 10 flushing and test programs in 26 languages. Easy desilting operation by buttons to switch over the air supply during the flushing process. Menu-guided input and menu-guided control for flushing drinking water installations according to EN 806-4:2010 with the possibility for the user to change the factory-set default values for adaptation to the applicable national safety provisions, rules and regulations for the application site. Format selection for date and time and selection of the different units. Input and control unit with 3" display with modern LCD technology, 76 mm screen diagonal, 128×64 pixels. Permanent process monitoring during the program sequences. USB port for USB stick or printer. The respective latest version software for the input and control unit is available via USB stick as a download under www.rems.de > Downloads > Software.

Desilting and flushing

Buttons for easy switching of the air supply during the flushing process when desilting radiator and flat heater systems with the following possibilities: (1) without compressed air, (2) intermittent compressed air, (3) constant compressed air.

Flushing according to EN 806-4

Flushing of drinking water installations with water or with a water/air mixture with intermittent compressed air in accordance with EN 806-4:2010 and information leaflet "Flushing, Disinfection and Commissioning of Drinking Water Installations" (August 2014) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK).

Disinfection

REMS V-Jet TW disinfection unit for disinfection of drinking water installations in accordance with EN 806-4:2010 and information leaflet "Flushing, Disinfection and Commissioning of Drinking Water Installations" (August 2014) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK) and other pipe systems, as an accessory. REMS Peroxi Color, consisting of a 1 l bottle of REMS Peroxi dosing solution for disinfection of approx. 1001 line volume and 20 ml bottle of red REMS Color dye for dyeing the dosing solution for filling and wash-out check, pipette for checking the effectiveness of the dosing solution (page 123). Feeding of the disinfectant solution without additional dosing pump (Patent EP 2 954 960).

Cleaning and preservation

REMS V-Jet H cleaning and preservation unit for cleaning and preserving radiators and area heating systems, as an accessory. Cleaner, dyed green for filling and wash-out check and corrosion protection, dyed blue for filling check, for approx. 100 l line volume respectively (page 123). Feeding of cleaner and corrosion protection without additional dosing pump (Patent EP 2 954 960 pending).

Pressure testing with compressed air

Leak testing of drinking water installations with compressed air according to information leaflet "Leak Testing of Drinking Water Installations with Compressed Air, Inert Gas or Water" (January 2011) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK), leak testing of gas installations with compressed air according to the technical rule "DVGW-TRGI 2018, Technical Rules for Gas Installations - DVGW Worksheet G 600" of the German Gas and Water Association (DVGW) and leak testing of other pipe systems and vessels with compressed air.

Load testing of drinking water installations with compressed air according to information leaflet "Leak Testing of Drinking Water Installations with Compressed Air, Inert Gas or Water" (January 2011) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK), load testing of gas installations with compressed air according to the technical rule "DVGW-TRGI 2018, Technical Rules for Gas Installations - DVGW Worksheet G 600" of the German Gas and Water Association (DVGW) and load testing of other pipe systems and vessels with compressed air.

Pressure testing with water

REMS Multi-Push SLW with hydro-pneumatic water pump for hydrostatic pressure testing of drinking water installations with water in accordance with EN 806-4:2010, test method A, B or C or test method B, modified in accordance with information leaflet "Leak Testing of Drinking Water Installations with Compressed Air, Inert Gas or Water" (January 2011) of the German Central Association for Sanitary, Heating and Air Conditioning (ZVSHK) and for pressure testing of other pipe systems and vessels.

Pneumatic pump

Pneumatic pump for controlled filling of all types of vessels with compressed air ≤ 0.8 MPa/8 bar/116 psi, with automatic switch-off on reaching the preset air pressure, e.g. for pumping up expansion vessels or tyres.

Operation of pneumatic tools

Connection for pneumatic tools up to an air requirement ≤ 230 Nl/min, adjustable, for adaptation to the pneumatic tool being used. Pressure gauge for controlling the air pressure supplied by the compressed air tank. Pneumatic hose with quick coupling DN 7.2, as an accessory.

Logging

Results of the flushing and test programs are saved with date, time and log number in the selected language and can be transferred to USB stick or printer for documentation. Printer as an accessory. Additions to saved data, e.g. customer name, project number, tester, are possible on external devices (e.g. PC, laptop, tablet-PC, Smartphone).





Supply format

REMS Multi-Push SL Set. Electronic flushing and pressure testing unit with oil-free compressor. For flushing with water or a water/air mixture, disinfection, cleaning, preservation of pipe systems, e.g. for desilting, cleaning and preservation of radiators and area heating systems, flushing and disinfection of drinking water installations, for pressure testing of pipe systems and vessels with compressed air, as a pneumatic pump for controlled filling of all types of vessels with compressed air p ≤ 0.8 MPa/8 bar/116 psi, and for operation of pneumatic tools ≤ 230 Nl/min. Input and control unit. Piston compressor with crank drive, capacitor motor 230V, 50 Hz, 1,500 W, person circuit breaker (PRCD). Mobile tubular steel frame. Fastenings for water inputs and outputs of the REMS Multi-Push. Two Ø1" suction/pressure hoses, with fabric inlay, 1.5 m long, with 1" hose screw fittings, with caps. One Ø8 mm compressed air hose, 1.5 m long, with quick coupling DN 5 and G ½" hose screw fitting, for pressure testing with compressed air. Connecting hose compressor/water connections, 0.6 m long, with quick coupling DN 7.2 and 1" hose screw fitting, 1" double nipple, for blowing out water remains from REMS Multi-Push and suction/pressure hoses at the end of work. Without disinfection unit, without cleaning and preservation unit. In a carton

	Art	No.	€
	1156	10 R220	3.108,81

Other voltages on request.



Other voltages on request.

Accessories

Description	ArtNo.	€
Fine filter with fine filter cartridge 90 μ m, washable, with large dirt collection vessel	115609R	123,52
Fine filter cartridge 90 $\mu m\text{,}$ for fine filter with fine filter cartridge 90 μm	043054	40,07
Pressure gauge, p \leq 6 MPa/60 bar/870 psi, for pressure and leak testing of pipe systems and vessels up to 6 MPa/60 bar/870 psi.	115140	111,38
Fine scaled pressure gauge, p ≤ 1.6 MPa/16 bar/ 232 psi, for pressure and leak testing of pipe systems and vessels up to 1.6 MPa/16 bar/232 psi. CL 1.0.	115045	79,61
Fine scaled pressure gauge, p ≤ 250 hPa/250 mbar/ 3.6 psi, for pressure and leak testing of pipe systems and vessels up to 250 hPa/250 mbar/3.6 psi. CL 1.6.	047069	240,19
Compressed air hose Ø 14 mm, 1.5 m long, with quick couplings DN 7.2 (plug, socket), for connecting pneumatic tools	115621 R	61,97
Compressed air hose Ø 8 mm, 7 m long, with quick coupling DN 5 (plug) and G ½" hose screw fitting, for pressure testing with compressed air.	115667 R	64,88
Compressed air hose Ø 8 mm, 1.5 m long, with quick coupling DN 5 (plug, socket) for gas testing with compressed air.	115747 R	67,26
High-pressure hose Ø ½", 7 m long, with G ½" hose screw fittings, with caps, for pressure testing of pipe systems and vessels with water with REMS Multi-Push SLW.	115661 R	128,71
Ø 1" suction/pressure hose, with fabric inlay, 1.5 m long, with G 1" screw fittings for flushing, disinfection, cleaning, preservation and pressure testing with water.	115633R	59,27
Double nipple 1" , for connecting 2 suction/pressure hoses and blowing out the suction/pressure hoses	045159	10,38



Description	ArtNo.	€
Printer for printing the stored results of the flushing and test programs, 1 roll of paper, USB connecting cable, power supply/charger Ni-Mh 100 – 240 V, 50 – 60 Hz, 3 W	115604R	508,62
Paper roll, pack of 5 for printer	090015R	18,89
Case with inlays for printer, paper rolls and other accessories	115703R	70,58
REMS V-Jet TW, disinfection unit for drinking water installations, for feeding dosing solution for disinfection	115602R	304,13
REMS Peroxi Color, 11 bottle of REMS Peroxi dosing solution for disinfection of approx. 1001 line volume, 20 ml bottle of red REMS Color dye for dyeing the dosing solution for filling and wash-out check, pipette for checking the effectiveness of the dosing solution.	115605R	82,00
Test strips H_2O_2 0 – 1,000 mg/l, pack of 100, for checking the concentration of the disinfection solution	091072	71,21
Test strips H ₂ O ₂ O − 50 mg/l, pack of 100, for checking the complete flushing out of the disinfection solution after disinfection	091073	71,21
REMS V-Jet H, cleaning and preservation unit for radiators and area heating systems, for feeding cleaner and corrosion protection.	115612R	304,13
REMS CleanH 1 l bottle of cleaner for radiators and area heating systems, dyed green for filling and wash-out check, for approx. 100 l line volume.	115607R	57,09
REMS NoCor 1 l bottle of corrosion protection for preservation of radiators and area heating systems, dyed blue for filling check, for approx. 100 l line volume.	115608R	61,24
Hood for protecting the machine during transport and storage	115677 R	39,24
XL-Boxx system case for hoses	579600RMP	198,26



REMS CleanM

Highly effective machine cleaner for fast, reliable removal of oily and greasy soiling of all kinds. For cleaning and degreasing machines, tools etc. For trade and industry.

REMS CleanM – you can't get cleaner than that. Very high cleaning effect.

Especially for fast, reliable removal of oily and greasy soiling of all kinds. Easily biodegradable according to OECD 302 B. Free from substances classified as harmful to the environment.

Universal cleaner for trade and industry. For cleaning and degreasing machines and tools.

Can also be used for removing lime scale.

REMS CleanM spray bottle without propellant.

Supply format

REMS CleanM. Highly effective machine cleaner for fast and reliable removal of oily and greasy soiling. For cleaning and degreasing machines, tools etc.

Packing	ArtNo.	€
500 ml spray bottle	140119R	19,41

Machine cleaner





German Quality Product





Powerful electric filling and flushing unit for fast, easy filling, flushing and venting of closed systems. Ideal for solar power systems, ground heat systems and underfloor/wall heating.

Tank volume 30 litres **REMS Solar-Push K 60** with centrifugal pump

Transport capacity at 40 m pumping head 16 l/min

Transport volume ≤ 36 l/min

Transport pressure ≤ 0.55 MPa/5.5 bar/80 psi

Temperature of the transported media (constant load) $\leq 60^{\circ}$ C

 $(constant load) \leq 60^{\circ}C$ pH value of the transported media 6.5-9.5

REMS Solar-Push I 80 with impeller pump

Transport capacity at 40 m pumping head 18 l/min

Transport volume \leq 27 l/min

Transport pressure \leq 0.65 MPa/6.5 bar/94 psi

Temperature of the transported media

 $\begin{array}{ll} \mbox{(constant load)} & \leq 80^{\circ}\mbox{C} \\ \mbox{pH value of the transported media} & 6.5-9.5 \end{array}$

Media transported: heat transfer liquids, antifreeze, water, aqueous solutions, emulsions

REMS Solar-Push – filling, flushing and venting in one action. Self priming. High transport capacity.

System advantage

Filling, flushing and venting in one action. Ideal for solar power systems, ground heat systems and underfloor/wall heating. Also for filling tanks.

Design

Powerful, electric filling and flushing unit on stable, mobile tubular steel frame for secure standing. 2 large, air-filled tyres for easy transport in rugged building site conditions. Practical hose holder. Low weight, REMS Solar-Push I only 19 kg, REMS Solar-Push K only 20 kg. Sturdy plastic tank to hold 30 litres, made of UV-stabilised PE, with filling level indicator, removable, for easy cleaning, with large opening for easy filling. Practical screw cap for fast opening and closing. Return connection ¾" with immersion pipe avoids foaming of the transport medium when it enters the plastic tank. Stop tap for easy cleaning and easy changing of the plastic tank when using different transport media. Two practical handles for easy carrying of the plastic tank. High temperature-resistant connecting hose between plastic tank and pump. Fine filter in the suction line with large viewing window for easy recognition of residue air in the circuit as well as emitted contamination, e.g. chips, solder and welding residue.

REMS Solar-Push K 60

Self-suction centrifugal pump, suitable for different transport media, e.g. heat transfer liquids, antifreeze, water, aqueous solutions, emulsions. With proven, powerful condenser motor with quiet running, 940 W, on/off switch. High transport volume 36 l/min for fast filling, efficient flushing and venting of closed systems and for filling tanks. Pressure relief valve for simple pressure relief in the pressure hose at the end of operation, as an accessory. For continuous load $\leq 60^{\circ}$ C. 2 pieces flexible, transparent PVC fabric hoses ½" T60, for pressure and return lines, each 3 m long, with $\frac{3}{4}$ " hose screw fittings, temperature-resistant $\leq 60^{\circ}$ C.

REMS Solar-Push I 80

Dry self-suction impeller pump with special impeller, suitable for different transport media, e.g. heat transfer liquids, antifreeze, water, aqueous solutions, emulsions. With proven, powerful condenser motor with quiet running, 1000 W, on/off switch. High transport volume 27 l/min for fast filling, efficient flushing and venting of closed systems and for filling tanks. Pressure relief valve for simple pressure relief in the pressure hose at the end of operation. For continuous load $\leq 80\,^{\circ}\text{C}.$ 2 flexible EPDM fabric hoses ½" T100 (synthetic rubber) for pressure and return lines, each 3 m long, with $3\!\!\!/$ "hose screw fittings, high temperature-resistant $\leq 100\,^{\circ}\text{C}.$

Extensive accessories

Shut-off valve for closing the pressure or return line, e.g. during transport. Fine filter with fine filter bag 70 μm , consisting of a screw cap with return line connection for return line with $3^{\prime\prime}$ union, adapter and fine filter bag 70 μm , or fine filter with fine filter cartridge 90 μm , washable, with large dirt collection vessel, for return line with $3^{\prime\prime}$ connection for flushing underfloor heating/wall radiators and clearing sludge. Flow direction changeover valve complete with EPDM fabric hose $1^{\prime\prime}$ T100, for flushing underfloor heating/wall radiators and effective clearance of sludge by pressure surges when flow direction changes. Changeover valve for alternative suction of the transport medium from another tank, e.g. for larger volumes.



German Quality Product













REMS Solar-Push K 60. Electric filling and flushing unit for fast, easy filling, flushing and venting of closed systems. Transport volume ≤ 36 l/min, tank volume 30 l. With centrifugal pump, temperature-resistant for continuous load $\leq 60^{\circ}$ C. Transport pressure ≤ 0.55 MPa/5.5 bar/80 psi. Condenser motor 230 V, 50 Hz, 940 W. 2 pieces flexible, transparent PVC fabric hoses ½" T60, each 3 m long, temperature-resistant $\leq 60^{\circ}$ C. On sturdy tubular steel frame with air-filled wheels. In box.

ArtNo.	€
115312R220	933,16

Other voltages on request.







Supply format

REMS Solar-Push 1 80. Electric filling and flushing unit for fast, easy filling, flushing and venting of closed systems. Transport volume ≤ 27 l/min, tank volume 30 l. With impeller pump, temperature-resistant for continuous load $\le 80^\circ$ C. Transport pressure ≤ 0.65 MPa/6.5 bar/94 psi. Transport capacity at 40 m transport height 10 l/min. Condenser motor 230 V, 50 Hz, 1000 W. Pressure relief valve. 2 pieces flexible, EPDM fabric hoses ½" T100, each 3 m long, high temperature-resistant $\le 100^\circ$ C. On sturdy tubular steel frame with air-filled wheels. In box.

€	ArtNo.	
1.140,76	115311 R220	

Other voltages on request.

Accessories

Description	ArtNo.	€
PVC fabric hose ½" T60 for pressure or return line, 3 m long, with ¾" hose screw fittings, temperature-resistant ≤ 60°C.	115314R	43,08
EPDM fabric hose $\frac{1}{2}$" T100 for pressure or return line, 3 m long, with $\frac{1}{2}$ " hose screw fittings, high temperature-resistant $\leq 100^{\circ}$ C	115315R	57,61
EPDM fabric hose $\frac{1}{2}$" T165 for pressure or return line, 3 m long, with $\frac{3}{2}$ " hose screw fittings, high temperature-resistant ≤ 165 °C	115319R	210,71
$\mbox{\it \%"}$ shut-off valve for closing the pressure or return line, e.g. during transport.	115324R	52,11
30 l plastic tank made of UV-stabilised PE.	115375R	165,04
Pressure relief valve for Solar-Push K 60.	115217 R	74,11
Fine filter with fine filter bag 70 μ m, consisting of a screw cap with return line connection for return line with %" union, adapter, 1 file filter bag 70 μ m, for flushing underfloor heating/wall radiators and clearing sludge	115220	104,84
Fine filter bag 70 μm (pack of 10), fine file filter with fine filter bag 70 μm	115221 R10	88,96
Fine filter with fine filter cartridge 90 µm, washable, with large dirt collection vessel, for return line with ¾" union, for flushing underfloor heating/wall radiators and clearing sludge	115323R	220,06
Fine filter cartridge 90 μm , for fine filter with fine filter cartridge 90 μm	043054	40,07
Flow direction changeover valve complete with EPDM fabric hose ½" T100, for flushing underfloor heating/wall radiators and effective clearance of sludge by pressure surges when flow direction changes	115326R	291,68
Changeover valve for alternative suction of the transport medium from another tank, e.g. for larger volumes.	115325R	86,98





Bending

Single-hand tube bender	128
Oil-hydraulic hand pipe bender	130
Cordless electro-hydraulic tube bender	132
Oil-hydraulic pipe bender	134
Electric pipe and tube bender	136
Cordless tube bender	140
Hand tube bender	142

REMS Swing

Practical one-hand pipe bender for dimensionally accurate bending of pipes up to 90° . Ideal for on-site work. For trade and industry. For the building site and the workshop.

Soft copper pipes, also thin-walled	Ø 10−22 mm Ø ¾ − 7₃" s ≤ 1 mm
Coated soft copper tubes	Ø 10 – 18 mm Ø ¾ – 5⁄8 " s ≤ 1 mm
Soft, coated carbon steel pipes of the pressfitting systems	Ø 12 – 18 mm
of the pressitting systems	s ≤ 1.2 mm
Soft precision steel tubes	Ø 10 – 18 mm s ≤ 1 mm
Multi-layer composite tubes	Ø 14–32 mm

REMS Swing – bending tubes where they are installed. Ultra light, ultra small, ultra handy. Universally usable for many pipe types. Ultra fast operation by practical multifunction lever for fast in-feed and fast return. Proven, reliable ratchet feed. Ideal also for coated tubes.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

Cost advantage

Bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, job site-proven. Handy and light, drive unit only 0.9 kg. Can be used anywhere, free-hand, in confined areas. Easy, quick working, e.g. Ø 22 mm copper pipe bend in just 9 s. Marked bending formers for exact bending. Overbend, tier bend possible. Easy and rapid changing of bending formers. Back former support S Ø 10–26 mm, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø 10–26 mm, %–%". Back former support Ø 32 mm with back formers for pipe Ø 32 mm. Device for reverse bending on laid pipes up to Ø 22 mm, %", as accessory.

Bending formers and sliding pieces

In high-strength, high-slide, glass-fibre reinforced polyamide. Angle scale on each bending former for dimensionally accurate bending. See table on page 129 for bending formers. UP bending formers with smaller bending radii for Uponor Uni Pipe PLUS composite pipes, see below.

Drive

Sturdy drive unit with proven, reliable ratchet feed for the complete work range up to \emptyset 32 mm. Practical multi-function lever for fast in-feed and fast return saves time and effort.





German Quality Product





Supply format

REMS Swing UP Set. Single-hand tube bender \emptyset 16 – 32 mm, up to 90°. for Uponor Uni Pipe PLUS composite pipes \emptyset 16 – 32 mm. With UP drive unit, UP bending formers with smaller bending radii, UP back former supports \emptyset 16 – 32 mm with back formers, in a sturdy steel box/case.

Description mm	ArtNo.	€
Set 16 + 20 + 25 + 32	153030R	550,14

Accessories

Description	ArtNo.	€
REMS Swing UP drive unit	153300R	153,62
UP back former support Ø 16–32 mm with back formers for pipes Ø 16–32 mm	153307R	97,26
UP bending former Ø 16 mm, bending radius 32 mm	153303R	46,61
UP bending former UP Ø 20 mm, Biegeradius 40 mm	153304R	46,61
UP bending former UP Ø 25 mm, Biegeradius 62,5 mm	153305R	46,61
UP bending former UP Ø 32 mm, Biegeradius 80 mm	153306R	151,55
Steel case with inlay	153265R	55,01



REMS Swing Set. Single-hand tube bender \emptyset 10 – 32 mm, \emptyset % – %", up to 90°. Soft copper pipes Ø 10-22 mm, Ø 36-76", s ≤ 1 mm, soft, coated copper pipes \emptyset 10 – 18 mm, \emptyset 3% – 5% ", s \leq 1 mm, soft, coated carbon steel pipes of the pressfitting systems \emptyset 12 – 18 mm, $s \le 1.2$ mm, soft precision steet pipes \emptyset 10 – 18 mm, $s \le 1.2$ mm. Up to \emptyset 26 mm with drive unit, bending formers, back former supports S \emptyset 10 – 26 mm with back formers, in a sturdy steel box/case. Up to \emptyset 32 mm with drive unit, bending formers, 2 back former supports \emptyset 10 – 26 mm and \emptyset 32 mm with back formers, in a sturdy steel case

Description mm	inch	ArtNo.	€
Set 12 + 15 + 18 + 22	1/2 + 5/8 + 3/4 + 7/8"	153025R	359,15
Set 10 + 12 + 15 + 18 + 22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153021 R	375,76
Set 12 + 14 + 16 + 18 + 22	1/2 + 3/4 + 7/8"	153020R	375,76
Set 14+16+20+25/26		153026R	359,15
Set 14+16+18+20+25/26		153022R	375,76
Set 16 + 20 + 25/26 + 32		153029R	570,90
Set Allround 22 10+12+14+15+16+17+18+20+22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153027 R	482,67
Set 16+18+20+25/26+32		153023R	607,23
Set Allround 32 10+12+14+15+16+17+18+20+22+			
25/26+32	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153028R	679,89





Accessories

Description		ArtNo.	€
REMS Swing drive unit		153100R	153,62
Back former support S for pipes Ø 10 – 26 mm,	153125RX	61,97	
Back former support Ø 32 mm with back formers for pipe Ø 32 mm		153115RX2	133,38
Device for reverse bend on laid pipes up to Ø 26 r		153140	154,66
Steel case with inlay		153265R	55,01
Case with inlay		153270R	107,95
	quitable for		

Case With Hitay							1332/01	107,73
			suit	able	for			
Bending former for tubes Ø mm/inch	Bending radius ¹⁾ mm	Cu	Cn-D	St 10305-U	St 10305	>		
10, 3/8"	30	•			•		153155R	32,07
12, 10 U, ½"	36	•	•		•		153160R	32,07
14, 12 U	50	•		•	•	•	153170R	32,07
15, 12 U, 5⁄8"	55	•	•		•		153175R	32,07
16, 14 U	55	•	•		•	•	153180R	32,07
17, 15 U	60			•		•	153185R	32,07
18, 14 U, 15 U, 16 U, ¾"	72	•	•		•	•	153190R	32,07
20, 18 U	79	•	•	•		•	153195R	32,07
22, 18 U, %"	86	•	•				153200 R	32,07
25, 26	88					•	153205R	32,07
32	128					•	153210R	60,20

1) Bending radius mm at the neutral axis of the bend (DVGW GW 392)

soft copper tubes, also thin-wall

St 10305-U: soft, coated carbon steel pipes of the pressfitting systems

EN 10305-3

soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3 St 10305:


coated

multi-layer composite tubes of pressfitting systems



Effort-saving, oil-hydraulic hand pipe bender for dimensionally accurate bending of pipes up to 90°. Ideal for on-site work. For trade and industry. For the building site and the workshop.

Soft copper pipes, also thin-walled	Ø 10 – 22 mm
	Ø 3/8 – 7/8"
	s ≤ 1 mm
Coated soft copper tubes	Ø 10 – 18 mm
	Ø 3/8 – 5/8"
	s ≤ 1 mm
Pipes of press fitting systems made of:	
stainless steel, nickel steel	Ø 15–22 mm
	s ≤ 1.2 mm
Soft, coated carbon steel	Ø 12 – 18 mm
	s ≤ 1.2 mm
Soft precision steel tubes	Ø 10 – 22 mm
	s ≤ 1.5 mm
Multi-layer composite tubes	Ø 14 – 32 mm



Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

Cost advantage

Bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design


Robust, compact drive unit with closed, maintenance-free hydraulic system. Handy and light, only 2.4 kg. Can be used anywhere, even in confined spaces. Easy, quick working, e.g. Ø 22 mm copper pipe bend in just 18 s. Marked bending formers for exact bending. Overbend, tier bend possible. Easy and rapid changing of bending formers. Back former support H-S Ø 10–26 mm, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø 10–26 mm, %–%". Back former support Ø 32 mm with back formers for pipes Ø 32 mm. Device H-S for reverse bending on laid pipes up to Ø 26 mm, %", as accessory.

Bending formers and sliding pieces

Bending formers and back formers made of high strength, high sliding, glass fibre reinforced polyamide or aluminium bending formers. Angle scale on each bending former for dimensionally accurate bending. See table on page 131 for bending formers.

Drive

Oil-hydraulic drive unit with hydraulic cylinder made from high-quality, rolled hydraulic tube. Ergonomically designed thrust lever for strength saving pressure build-up with manual hydraulic pump. Reliable hydraulic thrust with overload protection in the foremost piston position and overpressure valves for safe working.

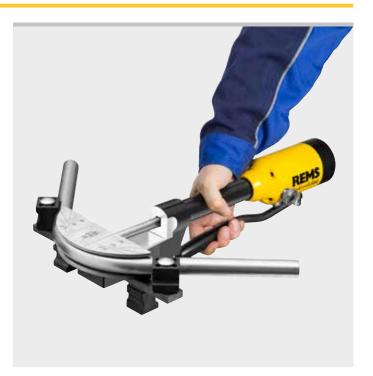









German Quality Product



REMS Hydro-Swing Set. Oil-hydraulic hand pipe bender Ø $10-32\,\text{mm}$, Ø %-%", up to 90° . Soft copper pipes Ø $10-22\,\text{mm}$, Ø %-%", s $\leq 1\,\text{mm}$, soft, coated copper pipes Ø $10-18\,\text{mm}$, Ø %-%", s $\leq 1\,\text{mm}$, pipes of the press fitting systems made of soft, coated carbon steel Ø 12−18 mm, s≤1.2 mm, soft precision steel pipes \emptyset 10 – 18 mm, s \leq 1.5 mm, composite tubes \emptyset 14 – 32 mm. Up to \emptyset 26 mm with drive unit, polyamide bending formers, back former support H-S Ø $10-26\,\mathrm{mm}$ with back formers, in a sturdy case. Up to \emptyset 32 mm with drive unit, polyamide bending formers, 2 back former supports Ø $10-26\,\mathrm{mm}$ and Ø $32\,\mathrm{mm}$ with back formers, in a sturdy case.

Description mm	inch	ArtNo.	€
Set 12 + 15 + 18 + 22	1/2 + 5/8 + 3/4 + 7/8"	153525RX	699,61
Set 10 + 12 + 15 + 18 + 22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153521 RX	725,56
Set 12 + 14 + 16 + 18 + 22	1/2 + 3/4 + 7/8"	153520RX	725,56
Set 14 + 16 + 20 + 25/26		153526R	699,61
Set 14 + 16 + 18 + 20 + 25/26		153522R	725,56
Set 16 + 20 + 25/26 + 32		153529 R	777,46
Set Allround 22 10+12+14+15+16+17+18+20+22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153527RX	755,66
Set 16+18+20+25/26+32		153523R	801,34
Set Allround 32 10+12+14+15+16+17+18+20+22+	3/ . 1/ . 5/ . 3/ . 7/ "	152520DV	057.20
25/26+32	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153528RX	857,39





Supply format

REMS Hydro-Swing INOX Set. REMS Hydro-Swing with aluminium bending

formers, especially also for Geberit Mapress Stainless Steel (EN 10088, 1.4401),

Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free),

Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)),

Viega Sanpress (EN 10088, 1.4401),

Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Description mm	ArtNo.	€
Set 15 + 18 + 22	153510R	773.31

Accessories

Description	ArtNo.	€
REMS Hydro-Swing drive unit	153500R	569,86
Back former support H-S Ø 10 – 26 mm with back formers for pipe Ø $10 - 26$ mm, $\frac{3}{8} - \frac{7}{8}$ "	153501 R	69,34
Back former support Ø 32 mm with back formers for pipe Ø 32 mm	153115RX2	133,38
Device H-S for reverse bending on laid pipes up to Ø 26 mm, %"	153450R	237,70
Case with inlay	153570R	107,95

Case with inlay						153570R	107,95		
					ole f	or			
Bending former for tubes Ø mm/inch	Bending radius ¹⁾ mm	Cu	Cu-U	St 10217	St 10305	St 10305-U	^		
10, 3/8"	30	•			•			153155R	32,07
12, 10 U, ½"	36	•	•		•			153160R	32,07
14, 12 U	50	•			•	•	•	153170R	32,07
15, 12 U, 5/8" ²⁾	55	•	•	•	•			153531 R	73,49
15, 12 U, %"	55	•	•		•			153175R	32,07
16, 14 U	55	•	•		•		•	153180 R	32,07
17, 15 U	60					•	•	153185R	32,07
18, 14 U, 15 U, 16 U, ¾" 2)	72	•	•	•	•		•	153532R	73,49
18, 14 U, 15 U, 16 U, ¾"	72	•	•		•		•	153190R	32,07
20, 18 U	79	•	•			•	•	153195R	32,07
22, 18 U, %" ²⁾	86	•	•	•	•			153540R	73,49
22, 18 U, %"	86	•	•					153200R	32,07
25, 26	88						•	153205R	32,07
32	128						•	153210R	60,20

1) Bending radius mm at the neutral axis of the bend (DVGW GW 392)

2) Aluminium bending formers

soft copper tubes, also thin-wall, EN 1057 Cu:

St 10217: stainless, nickel steel pipes of the press fitting systems EN 10217-7, EN 10312, series 2, material 1.4401

soft precision steel pipes EN 10305-1, EN 10305-2,

EN 10305-3

St 10305-U: soft, coated carbon steel pipes of the pressfitting systems

EN 10305-3

St 10305:

multi-layer composite tubes of pressfitting systems





Cordless tube bender

Universal, mobile, handy electric tool for dimensionally accurate bending of pipes up to 90°. Ideal for on-site work. For trade and industry. For the building site and the workshop. Li-Ion 22V Technology. For battery and corded operation.

Soft copper pipes, also thin-walled	Ø 10 – 22 mm Ø 3/8 – 7/8 "
	s ≤ 1 mm
Coated soft copper tubes	Ø 10 – 18 mm
	Ø 3/8 – 5/8"
	s ≤ 1 mm
Pipes of press fitting systems made of:	
stainless steel, nickel steel	Ø 15 – 22 mm
	s ≤ 1.2 mm
Soft, coated carbon steel	Ø 12 – 18 mm
	s ≤ 1.2 mm
Soft precision steel tubes	Ø 10 – 22 mm
·	s ≤ 1.5 mm
Multi-layer composite tubes	Ø 14-32 mm

REMS Hydro-Swing 22V – bending tubes where they are installed. Mobile, handy, light. Universally usable for many pipe types. Li-lon 21.6V, 2.5 Ah battery, for approx. 110 stainless steel pipe bends of the Ø 22 mm press fitting systems with one battery charge*.

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Also for copper thin-walled heating tubes according to EN 1057 and for tubes of pressfitting systems.

Cost advantage

Cordless tube bender recovered after a few bends through savings on fittings. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Robust, compact drive unit with closed, maintenance-free hydraulic system. Mobile, handy, light. Drive machine with battery pack weights only $3.0\,\mathrm{kg}$. Can be used anywhere, even in confined spaces. Easy, quick working, e.g. \emptyset 22 mm stainless steel pipe bend in just 8 s. Marked bending formers for exact bending. Overbend, tier bend possible. Easy and rapid changing of bending formers. Back former support H-S Ø 10-26 mm, rotatable according to the size of the pipe to be bent, with back formers for pipes Ø 10 – 26 mm, 3/8 – 7/8". Back former support Ø 32 mm with back formers for pipes Ø 32 mm. LED work light for illuminating the work place. Device H-S for reverse bending on laid pipes up to Ø 26 mm, %", as accessory.

Bending formers and sliding pieces

Bending formers and back formers made of high strength, high sliding, glass fibre reinforced polyamide or aluminium bending formers. Angle scale on each bending former for dimensionally accurate bending. See table on page 133 for bending formers.

Tons of thrust for crease-free bending within seconds. Thrust force 9 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon 22 V Technology. Highly resistant Li-lon 21.6 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6 V, 2.5 Ah battery for approx. 110 pipe bends, $4.4\,\mathrm{Ah}$ for approx. 190 pipe bends, $5.0\,\mathrm{Ah}$ for approx. 220 pipe bends, $9.0\,\mathrm{Ah}$ for approx. 396 pipe bends of the stainless steel Ø 22 mm press fitting systems with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 - 240 V, 90 W. Rapid charger 100-240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220-240 V/21.6 V, 15 A output, for mains operation instead of Li-Ion battery 21.6 V, as accessory

Supply format

REMS Hydro-Swing 22V INOX Set. REMS Hydro-Swing 22V with aluminium

bending formers, especially also for

Geberit Mapress Stainless Steel (EN 10088, 1.4401),

Geberit Mapress Stainless Steel (EN 10088, 1.4521, nickel-free),


Geberit Mapress Carbon Steel (EN 10305-3, 1.0034 (E195)),

Viega Sanpress (EN 10088, 1.4401),

Viega Prestabo (EN 10305-3, 1.0308 (E235)).

Description mm	ArtNo.	€
Set 15 + 18 + 22	153419 R220	1.483,30

Other voltages on request.

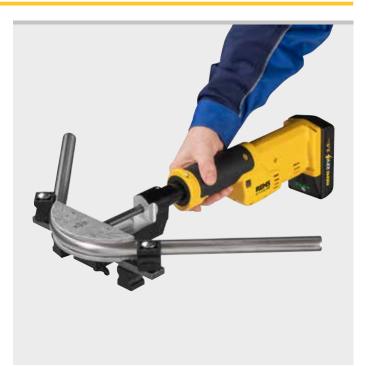









German Quality Product





REMS Hydro-Swing 22V Set. Cordless tube bender Ø 10 – 32 mm, Ø % – %", up to 90°. Soft copper pipes Ø 10 – 22 mm, Ø % – %", s \leq 1 mm, soft, coated copper pipes Ø 10 – 18 mm, Ø % – %", s \leq 1 mm, pipes of the press fitting systems made of soft, coated carbon steel Ø 12 – 18 mm, s \leq 1.2 mm, soft precision steel pipes Ø 10 – 18 mm, s \leq 1.5 mm, composite tubes Ø 14 – 32 mm. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220 – 240 V or 110 V, 50 – 60 Hz, 70 W. Up to Ø 26 mm with polyamide bending formers, back former support H-S Ø 10 – 26 mm with back formers. Up to Ø 32 mm with polyamide bending formers, 2 back former supports Ø 10 – 26 mm and Ø 32 mm with back formers. In XL-Boxx system case.

Description mm	inch	ArtNo.	€
Set 12+15+18+22	1/2 + 5/8 + 3/4 + 7/8"	153410RX220	1.389,88
Set 10 + 12 + 15 + 18 + 22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153411 RX220	1.431,40
Set 12 + 14 + 16 + 18 + 22	1/2 + 3/4 + 7/8"	153412RX220	1.431,40
Set 14 + 16 + 20 + 25/26		153413R220	1.389,88
Set 14+16+18+20+25/26		153414R220	1.431,40
Set 16 + 20 + 25/26 + 32		153415R220	1.483,30
Set Allround 22			
10+12+14+15+16+17+18+20+22	3/8 + 1/2 + 5/8 + 3/4 + 7/8"	153416RX220	1.555,96
Set 16+18+20+25/26+32		153417 R220	1.587,10
Set Allround 32 10+12+14+15+16+17+18+20+22+ 25/26+32	3/8 + 1/2 + 5/8 + 3/4 + 1/8"	153418 RX220	1.784,32
Basic-Pack (ohne Biegesegmente une	153401R220	1.203,04	
Other voltages on request.			



Accessories

Description	ArtNo.	€
REMS Hydro-Swing 22 V drive unit, without battery	153400R22	544,95
Back former support H-S Ø 10 – 26 mm with back formers for pipe Ø $10 - 26$ mm, $\frac{3}{6} - \frac{7}{6}$ "	153501 R	69,34
Back former support Ø 32 mm with back formers for pipe Ø 32 mm	153115RX2	133,38
Device H-S for reverse bending on laid pipes up to Ø 26 mm, %"	153450R	237,70
Battery Li-lon 21.6 V, 2.5 Ah	571571R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42
Rapid charger 100-240 V, 50-60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A, for mains operation instead of battery Li-lon 21.6 V	571567R220	414,16
XL-Boxx system case with inserts	153455R	233,55
REMS Lumen 2800 22V, cordless LED flood light, see	page 111	

					ж.	٠.			
Bending former for tubes Ø mm/inch	Bending radius ¹⁾ mm	Cu	Cn-D	St 10217	St 10305	St 10305-U	^		
10, 3/8"	30	•			•			153155R	32,07
12, 10 U, ½"	36	•	•		•			153160R	32,07
14, 12 U	50	•			•	•	•	153170R	32,07
15, 12 U, %" 2)	55	•	•	•	•			153531 R	73,49
15, 12 U, %"	55	•	•		•			153175R	32,07
16, 14 U	55	•	•		•		•	153180 R	32,07
17, 15 U	60					•	•	153185R	32,07
18, 14 U, 15 U, 16 U, ¾" ²⁾	72	•	•	•	•		•	153532R	73,49
18, 14 U, 15 U, 16 U, ¾"	72	•	•		•		•	153190R	32,07
20, 18 U	79	•	•			•	•	153195R	32,07
22, 18 U, %" 2)	86	•	•	•	•			153540 R	73,49
22, 18 U, %"	86	•	•					153200R	32,07
25, 26	88						•	153205R	32,07
32	128						•	153210R	60,20

suitable for

1) Bending radius mm at the neutral axis of the bend (DVGW GW 392)

2) Aluminium bending formers

Cu: soft copper tubes, also thin-wall, EN 1057

St 10217: stainless, nickel steel pipes of the press fitting systems EN 10217-7, EN 10312, series 2, material 1.4401
St 10305: soft precision steel pipes EN 10305-1, EN 10305-2,

EN 10305-3

St 10305-U: soft, coated carbon steel pipes of the pressfitting systems

EN 10305-3 coated

V: multi-layer composite tubes of pressfitting systems



133

Robust, oil-hydraulic pipe bender for dimensionally accurate bending of pipes up to 90°. For trade and industry. For the building site and the workshop.

Steel pipes EN 10255

 $0^{3/8}-2$ "

Multilayer composite tubes

Ø 32 – 75 mm

REMS Python – extremely easy bending up to Ø 2", 75 mm. Ideal for steel pipes EN 10255 and for multilayer composite tubes of the pressfitting systems. Also for producing level bends in different planes.

Universal use

For locksmith work, sanitary and heating installation and machine and plant engineering. Excellently suitable for steel pipes EN 10255 and for multilayer composite tubes of the pressfitting systems.

System advantage

Only **one** bender drive for the whole working range up to Ø 2", Ø 75 mm. Thus simple, inexpensive stocking. No confusion possible.

Cost advantage

Pipe bender is amortised after just a few bends by saving on fittings. No costs for fittings, storage, procurement. Saving of welds, press connections and working time. Increased safety due to fewer pipe connections.

Design

Robust, oil-hydraulic drive unit with closed, maintenance-free hydraulic system. 2 slide roller supports and 2 slide rollers form a closed bending frame for high rigidity and precision when bending. Upper back former support tiltable for easy insertion and removal of the pipe, with marked plug positions for the back formers according to the pipe size to be bent, with angle scale 0 to 90°. Upper slide roller support with laterally adjustable slide roller bearing plate for producing over-bends and level bends according to requirements also in different planes. Can be used anywhere, any time. No setting. Easy, effortless, quick working, e.g. 90° bend Ø 63 mm only 60 s. Tripod as accessory.

Bending formers and back formers

Bending formers St for steel pipes, form and pressure stable, made of highly resistant spheroidal iron. Bending formers V for multilayer composite tubes, form and pressure stable, made of torsion-free shell-cast aluminium. See page 135.

Marking on every bending former for dimensionally accurate bending. Angle gauge with angle scale 0 to 180° for dimensionally accurate bending, as an accessory. Optimum matching of bending formers and back formers guarantees material-compatible bending without cracks and creases. High strength back formers for low friction support of the thrust pressure. Fast changing of the bending formers and back formers by simple plug system.

Drive

Oil-hydraulic drive unit with hydraulic cylinder made from high-quality, rolled hydraulic tube. Overload protection of the hydraulic thrust in the foremost piston position and overpressure valves for safe working. Ergonomically designed thrust lever for strength saving pressure build-up with manual hydraulic pump. No danger of crushing due to end limiting of the thrust lever, for high work safety.



German Quality Product



Bridges.





Doglegs on several levels.



REMS Python Set. Oil-hydraulic pipe bender for dimensionally accurate bending of pipes up to 90° . Steel pipes EN 10255 Ø % – 2° , multilayer composite tubes Ø 32 – 75 mm. Drive unit with back former supports, upper back former support with laterally adjustable back former support bearing plate, 2 back formers, bending formers St or V. In sturdy carrying case.

Description	ArtNo.	€
Set St 3/8 + 1/2 + 3/4 + 1 + 11/4"	590020R	1.676,37
Set St ½ + ¾ +1+1¼ +1½ +2"	590021R	1.806,12
Set V 40 + 50 + 63 mm	590022R	1.702,32

Accessories

Description	ArtNo.	€
Drive unit with back former supports and back formers	590000R	1.479,15
Slide piece Ø 75 mm (pack of 2)	590111 R	370,57
Tripod	590150R	168,16
Carrying case with practical handles	590160R	247,04
Angle gauge for dimensionally accurate bending	590153R	43,18

3		,						
				suit	able	for		
Bending former for pipes Ø mm/inch	Bending radius ¹⁾ mm	Bending radius ²⁾ mm	St 10255	>				
St 3/8"	50		•				590051R	46,81
St 1/2"	65		•				590052R	55,84
St ¾"	85		•				590053R	67,16
St 1"	100		•				590054R	67,16
St 11/4"	150		•				590055R	75,15
St 1½"	170		•				590056R	91,03
St 2"	220		•				590057R	137,02
V 32 mm	112	128		•			590061 R	61,76
V 40 mm	140	160		•			590058R	78,06
V 50 mm	175	200		•			590059R	105,88
V 63 mm	220	252		•			590060R	149,47
V 75 mm	260	298		A			590062R	330,08

St 10255: Steel pipes (threaded pipes) EN 10255

V: multilayer composite pipes of the pressfitting systems

2 slide pieces Ø 75 mm (Art. No. 590111) required

Bending radius mm on the inside of the bend (EN 10255)

Bending radius mm at the neutral axis of the bend (DVGW VP 632)



Universal, compact electric tool for cold bending of pipes and tubes up to 180°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop.

•	
Hard, half-hard, soft copper tubes also thin-wall	Ø 10 – 35 mm Ø 3⁄8 – 13⁄8 "
Coated soft copper tubes, also thin-wall	Ø 10 – 18 mm
Thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1	Ø 3/8 – 13/8"
Pipes of press fitting systems made of stainless steel Carbon steel (coated)	Ø 12–28 mm Ø 12–28 mm
Soft precision steel tubes	Ø 10 – 28 mm
Steel pipes EN 10255	Ø 1/4 – 3/4"
Electric conduit EN 50086	Ø 16–32 mm
Multi-layer composite tubes	Ø 14 – 40 mm

REMS Curvo – wrinkle-free bending.

Universal for many pipe types. Instant use without setting. Fast and creep speed operation for precise bending. Rapid change of bending and back formers.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

System advantage

Only one type of bending and back formers for REMS Curvo 22V, REMS Curvo, REMS Curvo 50 and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, handy electric tool with integral absorbtion of torque during bending. Super light, drive unit only 8 kg. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bends, \emptyset 22 mm in only 6 s. Fast and crepe speed operation for precise bending. Overbend, double bend, tier bend, reversed bend possible. Height adjustable machine support as accessory.

Bending formers and back formers

Form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide. Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale 0 to 180° provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii (page 143).

Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Proven, powerful universal motor, 1000 W. Right and left-hand rotation. Stepless electronic safety switch for rapid and creep speed operation.

Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.



German Quality Product





REMS Curvo Set. Electric pipe and tube bender Ø 10-40 mm, Ø 1/4-1%", up to 180°. Hard, semi-hard, soft copper pipes, also thin-walled, Ø 10–35 mm, Ø %–1%", soft coated copper pipes, also thin-walled, Ø 10–18 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735–1 \emptyset % – 1%", pipes of the press fitting systems of stainless steel \emptyset 12 – 28 mm, carbon steel, also coated, \emptyset 12 – 28 mm, soft precision steel pipes \emptyset 10 – 28 mm, steel pipes EN 10255 Ø $\frac{1}{4}$ – $\frac{3}{4}$ ", electrical installation pipes EN 50086 Ø 16 – 32 mm, composite tubes Ø 14–40 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50-60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation, insert bolt. Bending formers and back formers. In sturdy steel case.

Description	ArtNo.	€
Set 15+18+22	580026R220	1.743,84
Set 15 + 18 + 22 + 281)	580027 R220	1.941,06
Set 15 + 18 + 22 + 28 ²⁾	580036R220	2.055,24
Set 15 + 18 + 22 + 28 ³⁾	580035R220	2.013,72
Set 12+15+18+22	580020R220	1.837,26
Set 12 + 15 + 18 + 22 + 281)	580033R220	2.107,14
Set 12+15+18+22+28 ²⁾	580037 R220	2.148,66
Set 15 + 22 + 28 ¹⁾	580022R220	1.837,26
Set 15 + 22 + 28 ²⁾	580040R220	1.951,44
Set 17 + 20 + 24	580023R220	1.909,92
Set 12 + 14 + 16 + 18 + 22	580021 R220	1.930,68
Set 12+14+16+18+22+28 ¹⁾	580031 R220	2.138,28
Set 12+14+16+18+22+28 ²⁾	580038R220	2.242,08
Set 14+16+18+22+28 ¹⁾	580028R220	2.034,48
Set 14 + 16 + 18 + 22 + 28 ²⁾	580039 R220	2.148,66
Set 36 + 1/2 + 56 + 34 + 78"	580024R220	2.345,88
Set 16 + 20 + 26 + 32	580025R220	2.231,70
Set 16 + 20 + 25 + 32	580034R220	2.148,66
Set 20 + 25 + 32	580029R220	2.117,52
Set 32+40	580030R220	2.148,66
Basic-Pack (without bending and back formers)	580010R220	1.328,64

REMS Curvo Set delivered with the smaller radius bending and back former (except Art.-No. 580029 and 580030), see page 143.

 Bending former and back former 28, R102, Art. No. 581070, for hard, semi-hard copper pipes, also thin-walled. See page 143.
 Bending former and back former 28, ¾" (DN 20), R102, Art. No. 581260, for hard copper pipes Ø 28 mm, Ø 1½", pipes of the press fitting systems of stainless steel/carbon steel Ø 28 mm, steel pipes ¾". See page 143.

³⁾ Bending former and back former 28, 3/4" (DN 20), R114, Art. No. 581310, for hard, semi-hard copper pipes \emptyset 28 mm, pipes of the press fitting systems of stainless steel/carbon steel \emptyset 28 mm, steel pipes %". According to DVGW work sheet GW 392 for hard and semi-hard copper pipes \emptyset 28 mm minimum bending radius 114 mm necessary. Wall thickness ≥ 0.9 mm. See page 143.





Accessories

Description	ArtNo.	€
Bending formers and back formers see page 143.		
REMS Curvo drive unit	580000R220	1.183,32
Insert bolt	582036	40,79
REMS bending spray, 400 ml	140120R	28,86
Steel case with insert	586000R	128,71
Machine support 3B, height adjustable,on tripod	586100R	243,93
Machine support WB, height adjustable, for mounting on work bench	586150R	171,27





Universal, compact electric tool for cold bending of pipes and tubes up to 90° . Can be used anywhere, without vice. For trade and industry. For the building site and the workshop.

·	
Steel pipes EN 10255 (DIN 2440)	Ø ¼ – 1¼"
Stainless steel pipes EN ISO 1127,	
EN 10217-1	Ø ½-1¼"
	s ≤ 2.6 mm
Hard, half-hard, soft copper tubes	Ø 10 – 42 mm
Thin-wall copper tubes	Ø 10-35 mm
Thick-walled copper pipes K65 for refrigeration and air conditioning	
technology EN 12735-1	Ø 3/8 – 15/8"
Pipes of press fitting systems made of	
stainless steel	Ø 12–42 mm
Carbon steel, also coated	Ø 12 – 42 (28) mm
Multi-layer composite tubes	Ø 14-50 mm
Further materials, see REMS Curvo	



Universal use

For metalwork and in sanitary, heating, air conditioning, refrigeration and hydraulic applications. Specially suited for steel pipe EN 10255, pipe for press-fitting systems, for hard and half hard copper pipe and for thin-walled copper heating pipe according to EN 1057.

System advantage

Bending formers and back formers of REMS Curvo 22V, REMS Curvo and REMS Sinus (page 143) also fit in the REMS Curvo 50 drive machine with adaptor block 10-40, support 10-40. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, handy electric tool with integral absorption of torque during bending. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bends of steel pipe Ø 1%" in only 37 s. Fast and creep speed operation for precise bending. Overbend, tier bend, reversed bend possible.

Bending formers and back formers

Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii (page 143). Bending formers and back formers REMS Curvo 50 (Ø 35 R 100, Ø 42 R 140, Ø 50 R 135, Ø 1" R 100, Ø 1%" R 140): Form and pressure resistant bending formers in ductile iron and back formers in high-strength, high-slide glass-fibre reinforced polyamide.

Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Proven, powerful universal motor, 1000 W. Right and left-hand rotation. Stepless electronic safety switch for rapid and creep speed operation.

Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.







German Quality Product





REMS Curvo 50 Basic-Pack. Electric pipe and tube bender Ø 10–50 mm, up to 90°. Steel pipes EN 10255 Ø ¼–1¼", stainless steel pipes EN ISO 1127, EN 10217-7, Ø ½–1½", s \leq 2.6 mm, hard, semi-hard, soft copper pipes, Ø 10–42 mm, thin-walled copper pipes Ø 10–35 mm, thick-walled copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 Ø ¾–15½", pipes of the press fitting systems of stainless steel Ø 12–42 mm, carbon steel Ø 12–42 mm, coated carbon steel Ø 12–28 mm, composite tubes Ø 14–50 mm, etc. Drive unit with maintenance-free gear and safety slipping clutch, universal motor 230 V or 110 V, 50–60 Hz, 1000 W, stepless electronic safety switch, right and left-hand rotation. Adaptor block 35–50, Support 35–50, insert bolt. In sturdy carrying case.

Ari	tNo.	€
5801	110 R220	3.477,30

Other voltages on request.

Accessories

Description	ArtNo.	€
Bending formers and back formers see page 143.		
REMS Curvo 50 drive unit	580100R220	3.072,48
Adaptor block 35–50, Support 35–50, for bending formers and back formers Ø 35 R100, Ø 42 R140, Ø 50 R135, Ø 1" R100, Ø 1%" R140 (see page 143).	582110R	184,76
Adaptor block 10 – 40, Support 10 – 40, for bending formers and back formers REMS Curvo, REMS Curvo 22V, REMS Sinus (see page 143).	582120 R	303,10
Insert bolt	582036	40,79
REMS bending spray, 400 ml	140120R	28,86
Carrying case with practical handles	590160R	247,04
Steel case with insert for each bending former and back former R 100 and R 135/R 140, 90°	586012R	110,03





Universal, mobile electric tool for cold bending of pipes up to 180°. Can be used anywhere, without vice. For trade and industry. For the building site and the workshop. Li-lon 22 V Technology. For battery and corded operation.

Hard, half-hard, soft copper tubes	
also thin-wall	Ø 10 – 28 mm
	Ø 3/8 – 11/8"
Coated soft copper tubes,	
also thin-wall	Ø 10 – 18 mm
Thick-walled copper pipes K65 for refrigeration and air conditioning	
technology EN 12735-1	Ø 3/8 – 11/8"
Pipes of press fitting systems made of	
stainless steel	Ø 12 – 28 mm
Carbon steel, also coated	Ø 12–28 mm
Soft precision steel tubes	Ø 10 – 28 mm
Steel pipes EN 10255	Ø 1/4 – 3/4"
Electric conduit EN 50086	Ø 16 – 25 mm
Multi-layer composite tubes	Ø 14-40 mm

REMS Curvo 22 V – wrinkle-free bending of pipes. Mobile, handy, light. Universal for many pipe types. Ready to use immediately without setting. Fast and creep speed with immediate stop for precise bending. Quick change of bending and back formers. Li-lon 21.6 V, 5.0 Ah battery, for approx. 90 pipe bends of the stainless steel Ø 22 mm press fitting systems with one battery charge*.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Mains independent. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

System advantage

Only one type of bending and back formers for REMS Curvo 22V, REMS Curvo, REMS Curvo 50 and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, mobile, handy electric tool with integral absorbtion of torque during bending. Super light, drive machine with battery pack weights only 8.5 kg. Electronic charging status check with low discharge protection. Practical D-shaped handle with soft grip. Can be used anywhere, anytime. No setting. Simple, effortless, fast working, e.g. 90° bend Ø 22 mm only 6 s. Fast and creep speed with immediate stop for precise bending. Overbend, double bend, tier bend, reversed bend possible. Height adjustable machine support as accessory.

Bending formers and back formers

Form and pressure resistant, in high-strength, high-slide, glass-fibre reinforced polyamide. Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale 0 to 180° provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers. Bending formers and back formers for different sizes, materials and bending radii (page 143).

Drive

Robust, maintenance-free gear. Final point safety in both directions through safety slipping clutch. Powerful battery motor 21.6 V, with large power reserve, 500 W output. Right and left-hand rotation. Stepless electronic safety switch for fast and creep speed, with immediate stop. Machine status check with overload protection of the drive unit against too high currents, with overheating protection by motor temperature monitoring (NTC), with electronic battery charging status check with charging level indication by a 2-coloured green/red LED.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6V, 4.4 Ah battery, for approx. 79 pipe bends, 5.0 Ah battery, for approx. 90 pipe bends, 9.0 Ah for approx. 160 pipe bends of the stainless steel \emptyset 22 mm press fitting systems with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220 – 240 V/21.6 V, 40 A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.



German Quality Product





Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless

Supply format

REMS Curvo 22V Set. Cordless tube bender Ø 10-40 mm, Ø $\frac{1}{4}-1\frac{1}{8}$ ", to 180° . Hard, semi-hard, soft copper pipes, also thin-walled, Ø 10-28 mm, Ø 36-1%", soft coated copper pipes, also thin-walled, \emptyset 10 – 18 mm, thick-walled copper soft coated copper pipes, also timi-watted, \emptyset 10 – 16 min, thick-watted copper pipes K65 for refrigeration and air conditioning technology EN 12735-1 \emptyset % –11%", pipes of the press fitting systems of stainless steel \emptyset 12 – 28 mm, carbon steel, also coated, \emptyset 12 – 28 mm, soft precision steel pipes \emptyset 10 – 28 mm, steel pipes EN 10255 \emptyset % – 3%", electrical installation pipes EN 50086 \emptyset 16 – 25 mm, composite tubes Ø 14–40 mm, etc. Drive machine with D-shaped handle, maintenance-free gear with safely slipping clutch, powerful battery motor 21.6 V, stepless, electronic safety switch with immediate stop, right and left-hand rotation. Machine status check with overload protection, temperature monitoring, battery charging status check. Li-lon 21.6V, $5.0\,\text{Ah}$ battery, $100-240\,\text{V}$, $50-60\,\text{Hz}$, $90\,\text{W}$ rapid charger. Insert bolt. Bending and back formers. In sturdy steel case.

Description	ArtNo.	€
Set 15+18+22	580051 R220	2.539,99
Set 15+18+22+28 ¹⁾	580052R220	2.818,17
Set 15 + 18 + 22 + 28 ²⁾	580053R220	2.792,22
Set 15 + 18 + 22 + 28 ³⁾	580054R220	2.750,70
Set 12+15+18+22	580055R220	2.574,24
Set 12+15+18+22+281)	580056 R220	2.844,12
Set 12+15+18+22+28 ²⁾	580057 R220	2.885,64
Set 15 + 22 + 28 ¹⁾	580058 R220	2.574,24
Set 15 + 22 + 28 ²⁾	580059 R220	2.688,42
Set 17 + 20 + 24	580060R220	2.646,90
Set 12 + 14 + 16 + 18 + 22	580061 R220	2.667,66
Set 12 + 14 + 16 + 18 + 22 + 28 ¹⁾	580062R220	2.875,26
Set 12 + 14 + 16 + 18 + 22 + 28 ²⁾	580063R220	2.979,06
Set 14+16+18+22+28 ¹⁾	580064R220	2.771,46
Set 14 + 16 + 18 + 22 + 28 ²⁾	580065 R220	2.885,64
Set 3/8 + 1/2 + 5/8 + 3/4 + 7/8"	580066 R220	3.082,86
Set 16 + 20 + 26 + 32	580067 R220	2.968,68
Set 16 + 20 + 25 + 32	580068 R220	2.885,64
Set 20 + 25 + 32	580069 R220	2.854,50
Basic-Pack (without bending and back formers)	580014R220	2.065,62

Other voltages on request.

REMS Curvo 22V Set delivered with the smaller radius bending and back former (except Art.-No. 580069), see page 143.

- Bending former and back former 28, R102, Art. No. 581070, for hard, semi-hard copper pipes, also thin-walled. See page 143.
 Bending former and back former 28, ¾" (DN 20), R102, Art. No. 581260, for hard copper pipes Ø 28 mm, Ø 1½", pipes of the press fitting systems of stainless steel/carbon steel Ø 28 mm. See page 143.
- $^{3)}$ Bending former and back former 28, $\frac{3}{4}$ " (DN 20), R114, Art. No. 581310, for hard, semi-hard copper pipes \emptyset 28 mm, pipes of the press fitting systems of stainless steel/carbon steel \emptyset 28 mm, steel pipes %". According to DVGW work sheet GW 392 for hard and semi-hard copper pipes \emptyset 28 mm minimum bending radius 114 mm necessary. Wall thickness ≥ 0.9 mm. See page 143.





Accessories

Description	ArtNo.	€
Bending formers and back formers see page 143.		
REMS Curvo 22 V drive unit, without battery	580004R22	1.442,82
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-Ion 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 40 A, for mains operation instead of battery Li-lon 21.6 V	571578R220	517,96
Insert bolt	582036	40,79
REMS bending spray, 400 ml	140120R	28,86
Steel case with inlay	566030R	128,71
Machine support 3B, height adjustable, on tripod	586100R	243,93
Machine support WB, height adjustable, for mounting on work bench	586150R	171,27
REMS Lumen 2800 22V, cordless LED flood light, see p	age 111	



Universal, robust hand tool for cold bending up to 180°. Can be used anywhere. For trade and industry. For the building site and the workshop.

•	
Hard, half-hard, soft copper tubes, also thin-wall	Ø 10 – 22 mm Ø 3/8 – 7/8 "
Coated soft copper tubes, also thin-wall	Ø 10 – 18 mm
Pipes of press fitting systems made of stainless steel, carbon steel (coated) Carbon steel	Ø 12–18 mm Ø 12–22 mm
Soft precision steel tubes	Ø 10 – 20 mm
Electric conduit EN 50086	Ø 16 – 20 mm
Multi-layer composite tubes	Ø 14 – 32 mm



Universal for many tubes. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Only one type of bending and back formers for REMS Sinus and REMS Curvo.

Universal use

For sanitary, heating, air conditioning, refrigerating and hydraulic applications. Specially suited for tubes of pressfitting systems, for hard and half-hard copper tubes and for thin-walled copper heating tubes according to EN 1057.

System advantage

Only one type of bending and back formers for REMS Curvo 22 V, REMS Curvo, REMS Curvo 50 and REMS Sinus. Therefore simple, inexpensive stocking. No confusion possible.

Cost advantage

Bender cost recovered after a small number of bends. No costs for fittings, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety thanks to fewer pipe joints.

Design

Compact, handy unit of bender drive and bending tools. Can be used anywhere, in parallel vice or free hand as double-hand-bender. Easy bending through long lever arms. Selectable lever positioning ensures optimum bending position and power transmission. Robust design, drive unit in hardened steel for high stress. Simple and rapid changing of bending and back formers. Crossover, swan-neck and U-bends possible.

Bending formers and back formers

For different pipe sizes, materials and bending radii, see page 143.

Bending lubricant

REMS bending spray ensures a permanent lubricating film for reducing energy expenditure and for uniform bending. High-pressure-proof, acid-free. CFC-free, so ozone-harmless.

Supply format

REMS Sinus Set. Hand tube bender \emptyset 10 – 32 mm, \emptyset % – %", up to 180°. Hard, half-hard, soft copper tubes, also thin-wall \emptyset 10 – 22 mm, \emptyset % – %", coated soft copper tubes, also thin-wall \emptyset 10 – 18 mm, pipes of the press fitting systems made of stainless steel, carbon steel (coated) \emptyset 12 – 18 mm, soft precision steel tubes \emptyset 10 – 22 mm, soft precision steel tubes, \emptyset 10 – 20 mm, electric conduit EN 50086, \emptyset 16 – 20 mm, multi-layer composite tubes \emptyset 14 – 32 mm and others. Drive unit, insert bolt. Bending formers and back formers. REMS bending spray. In sturdy steel case.

terio bonanig opiaji in otaraj otoot oacon		
Description	ArtNo.	€
Set 15+18+22	154001 R	803,41
Set 14+16+18	154002R	774,35
Set 12+15+18+22	154003R	903,06
Set 10 + 12 + 14 + 16 + 18 + 22	154004R	1.137,65
Basic-Pack		
(without bending and back formers and bending spray)	154010R	468,14

REMS Sinus Set is delivered with bending formers and back formers of the smaller radius, see page 143.





German Quality Product





Accessories

Description	ArtNo.	€
Bending and back formers see page 143.		
Insert bolt	582036	40,79
REMS Curvo drive unit	580000 R220	1.183,32
REMS Sinus drive unit	154000R	299,98
REMS bending spray, 400 ml	140120R	28,86
Steel case with inlay	154160R	128,71



Bending formers and back formers

Bending formers and back formers, 180°, form and pressure resistant, in highstrength, high-slide, glass-fibre reinforced polyamide or aluminum 90° (Ø 21.3 R 103, Ø 26.9 R 102, Ø 33.7 R 100, Ø 35 R 100, Ø 42 R 140, Ø 42.4 R 140, Ø 50 R 135, Ø 1" R 100, Ø $1\frac{1}{4}$ " R 140). Optimum matching of bending former and back former guarantees material-compatible gliding without cracks and creases. Angle scale provided on each bending former and mark on the back former ensure precise bending. Rapid change of bending formers and back formers.





Bending former and back former for pipes Ø mm/inch O.D.	R mm	X mm 90°	X mm 45°	Bending former material	REMS Sinus						REMS Curvo							REMS Curvo 22 V						REMS Curvo 50										
					no	Cu-U	St 10312 St 10305-11	0302	St 10255	>		Cu 12735	Cu-0 St 10312	St 10305-U	St 10305 St 10255	St 50086	> 5	Cu 12735	Cn-D	0312	St 10305-U	St 10255	St 50086	> 0	Cu 12727	Cu 12735 Cu-U	St 10312	St 1127	St 10305-U	St 10305	St 5008.6	>	ArtNo.	
10	40	45	20	Р	•	Т	Т	•	Т	Т	•	Т	Т	П	•		•	ī	Т	П	1)		T,	A	Т	Т	П	T.	<u> </u>	Т		581400	180,
12	45	49	22	Р	•		•	•			•	\perp	•		•		•			•	•				A	ì	A		T,	A	Ť		581410	135,
14, 10 U, ¼" (DN 6)	50	53	23	Р	•	•		•		•	•	1	•	П	• •	П	• •	•	•	П	-	•		• /	A	A	T	П	Ţ,	A A	T		581420	131,8
15, 12 U	55	56	25	Р	•			•			•		•	•	•		•	,		•	•	•			A		•		Δ.	A	Ì		581430	147,4
16, 12 U	60	62	28	Р	•	•		•	•	•	•	1	•	П	•	•	• •	,	•	П	-	•	•	• /	A	A	Т	П	1	A .			581440	148,4
17. 15 U	56	60	27	Р			•			•				•			•				•			•	ì				A		Ť	A	581110	181,
18, 14 U, 15 U, 3/8" (DN 10)	70	75	33	Р	•	• (•	•		•	•	-		П	• •		• •	,	•	•				• /	A	A	A	П	T,	A 4	T	A	581450	149,
20, 16 U, 18 U	75	80	36	Р	•	•	•		•	•	•		•	•		•	• •		•		•		•	•	A	A	-		A		1		581080	237,
21.3, ½" (s = 1.6/2.0/2.6)	103	110	50	S	П	Т		П	Т	Т	П	Т	Т	П	Т	П		Т	Т	П		Т	П	Т	Т	Т	Т		Т		ī	П	581480	536,
22, 18 U, ½" (DN 15)	77	81	36	Α	•	•		•			•	1	•		• •		•		•	•	•	•			A	A	•		Ì.	A A			581460	177,
22, 18 U, ½" (DN 15)	88	91	41	P			T				•	1	•		•		•	,	•	•	•	•		_	A	_	A			4	T		581470	260,
24, 22 U	75	85	38	P			Ť			İ	•	İ		•			•	-			•			_	A	Ť	İ		A	Ť	Ì		581130	288,
25	98	103	46	Р						•	•		Т		•	•	• •				-	•	•	• /	A		T		-	A .			581180	317,
26	98	108	49	Α			Ť			•					•		•	Ť			•			•	Ť		Ì		-	4	Ì	A	581270	438,0
26.9, ¾" (s = 1.6/2.0/2.6)	102	108	49	S	П			П			П	т	т	П		П				П					Т	Т	Т		Т	1	ī	П	581490	598,
281)	1023)	108	49	Р							•						•	,							A				Ì		Ť		581070	278,
28, ¾" (DN 20) ²⁾	102	110	50	Α	П			П			•	т	•	П	• •		•	,		•	-				A	Т		П	T,	A A	T	П	581260	428,
28, ¾" (DN 20) ²⁾	114	120	54	Α							•		•		• •		•	,		•		•			A		•			A 4	-		581310	371,
30. 28 U	98	105	47	P	П			П			•	т	т	•	т	П		Т	т	П	•	т			A	т	Т	П	A	т	Т	П	581150	349.
32	98	110	50	Р			Ť			•							•							•	Ť				i	Ė	Ť	A	581280	339,
32	114	121	54	Α	П			П			•	т	т	П		•	•		т	П		Т		• /	A	Т	Т	П	Т	т			581320	438,0
1" (DN 25)	100	105	47	S			Ť					Ť						Ť			T	Ť			Ť	Ť	İ		i				581520	498.
33.7, 1" (s = 1.6/2.0/2.6)	100	105	47	S	П			П			П	Ť	т	П		П			т	П		т			т	Т	Т		Т		i	П	581520	498,
35	100	105	47	S			Ť					\perp						Ť				Ť			i	Ť					Ť		581500	498.
35	140	150	68	Α	П			П			•	T	т	П		П			т	П		Т			A .	т		П	Т	т	Т	П	581350	585.4
40	140	148	67	Α			Ť					\perp					•	Ť				Ť		•	Ť	Ť	t		i	Ė	t	A	581330	589,
42	140	155	70	S	П			П			П	T	т	П		П				П		Т				т		П			Т	П	581510	532,
1¼" (DN 32)	140	150	68	S			t															t			Ť				i				581530	517,
42.4, 1¼" (s = 2.0/2.6)	140	150	68	S	П			П			П	T	т	П		П				П		т		т	т	т	т		Т		ī	П	581530	517,
50	135	143	64	S			İ			Ė								t							İ		İ		İ	jī	İ		581540	699,
				Р			÷			÷												÷							Ť		÷			
%" (9.5 mm)	43	48	22		•						•							•	-					_	A A	_							581200	228,
½" (12.7 mm)	52	60	27	P	_		-				-	•						-						_	A A	_	H		1	Ŧ	F		581210	217,9
%" (15.9 mm)	63	70	32		•							•					•	-						_	A A	_			1		-		581220	244,9
3¼" (19.1 mm)	75	82	37	P	•		-					-					•	-						-	A A	_	H		4	Ŧ	F		581230	291,
%" (22.2 mm)	98	107	48	-	•						بت	•					_	•						_	A 4	•			-		H		581240	341,
" (25.4 mm)	101	112	50	A							•						•	-						_	A		F		4	Ŧ	H	H	581360R	445,
l" (25.4 mm)	101	112	50	Р							•						•	-						_	A						H		581370	338,
1½" (28.6 mm)	102	110	44	Α			-					•					_	•						_	A 4	A	H		4	Ŧ	F		581260	428,
1½" (28.6 mm)	115	117	53	Α							•						•	-						_	A						H		581380	371,
1¼" (31.8 mm)	114	123	55	Α							•							-						_	A A	A	H		4	H	H		581320	438,0
1¼" (31.8 mm)	133	145	65	Α							•													4	A				1				581390	618,
1¾" (34.9 mm)	100	105	47	S														-							-45				1	ļ	P		581500	498,
1¾" (34.9 mm)	140	150	68	A							•	•												_	A A				1				581350	585,4
1%" (41.3 mm)	140	155	70	S																					ш								581510	532.

R mm Bending radius mm at the neutral axis of the bend (DVGW GW 392) Correction dimension for a 90° or 45° bend

X mm Wall thickness

s mm

Wall thickness hard, semi-hard copper pipes, also thin-walled, EN 1057 hard copper pipes EN 1057 According to DVGW work sheet GW 392 for hard and semi-hard copper pipes § 28 mm minimum bending radius 114 mm necessary. Wall thickness ≥ 0.9 mm. Adaptor block 10−40, support 10−40 (Art.-No. 582120) necessary. Adaptor block 35−50, support 35−50 (Art.-No. 582110) necessary. Adaptor block 35−50, support 35−50 (Art.-No. 582110) necessary. Ard, half-hard, soft copper tubes, also thin-wall, EN 1057 Copper pipes K65 for refrigeration and air conditioning technology in accordance with EN 12735−1, EN 12449 stainless steel pipes of the press fitting systems EN 10312, series 2, EN 10088, EN 10217-7 stainless steel pipes EN ISO 1127, EN 10217-7 coated, soft carbon steel pipes of the press fitting systems EN 10305-3 Cu 12735:

St 10312:

St 1127: St 10305-U:


St 10305:

coated, soft carbon steel pipes EN 103 1127, EN 10217-7
coated, soft carbon steel pipes of the press fitting systems EN 10305-3
soft precision steel pipes EN 10305-1, EN 10305-2, EN 10305-3,
carbon steel pipes EN 10305-3
Steel pipes (threaded pipes) EN 10255
Electrical installation pipes DIN EN 50086 St 10255: St 50086: U: V: P: A: S:

multi-layer composite tubes of pressfitting systems
Bending former made of glass fibre-reinforced polyamide
Bending former made of aluminium

Bending former made of spheroidal iron


If a bend is required at a certain point on the pipe, a length correction must be made to suit the pipe size. The correction dimension X specified in Fig. 1 must be considered for a 90° or 45° bend. The set dimension L must be reduced by the amount X here. If, e.g., the dimension L for pipe size 22 is 400 mm and a bend with a bending radius of 77 mm is to be made, the dimension line should be marked on the pipe at 319 mm. This line is then – as shown in Fig. 1 – to be aligned with the 0-mark on the bending former.

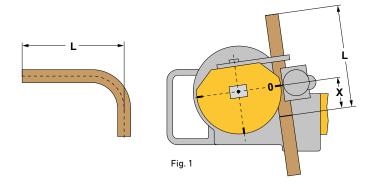



Radial Press Jointing

A. War	Cordless radial press Mini	147
	Pressing tongs Mini	152
	Cropping tongs Mini	184
Sile	Manual radial press	185
4	Electric radial press	186
A	Electro-hydraulic radial presses	187
	Cordless radial presses	190
	Pressing tongs / pressing rings	198
BTGA O	Hold-Harmless and Indemnification Agreement	240
3	Cropping tongs	241
-	Cable shears	241

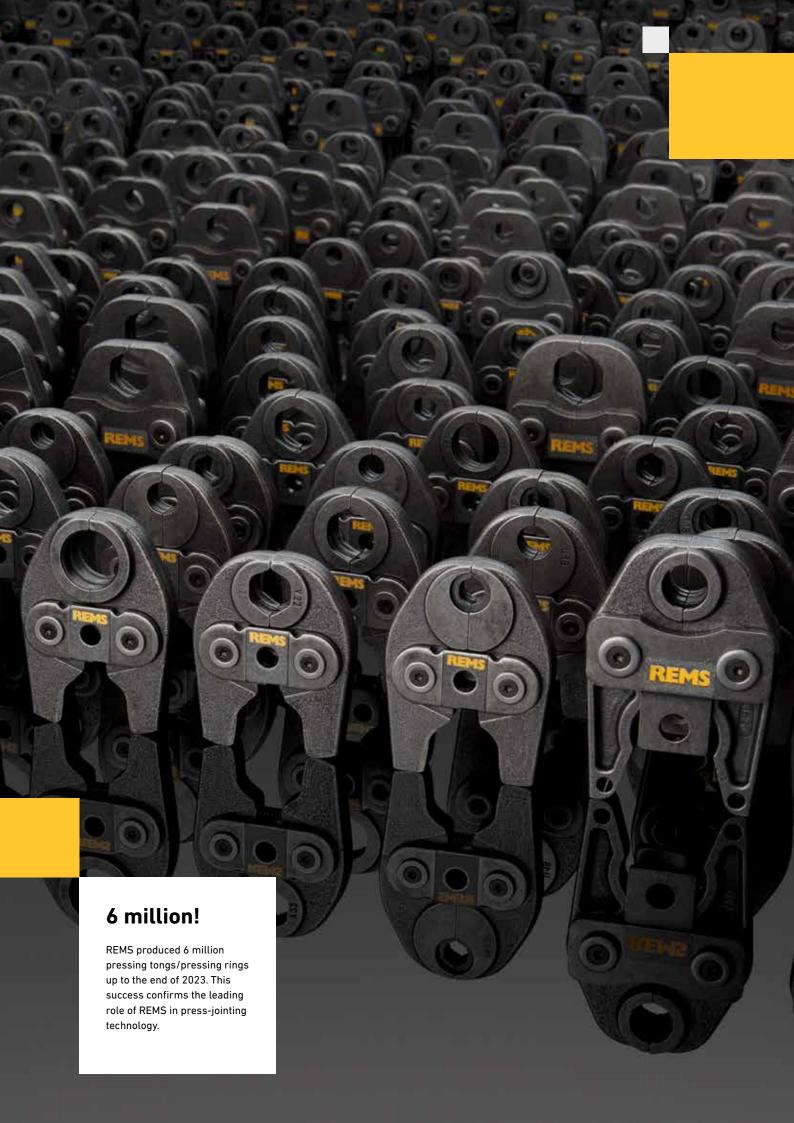

Universal, super handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. For battery and corded operation.

Pipe pressing joints Ø

Ø 10 – 40 mm 7 Ø 3/8 – 1 1/4

Complete range of REMS pressing tongs Mini/ pressing rings for all common pressfitting systems, see page 152-183.

REMS Mini-Press 14V ACC – universal up to Ø 40 mm. Super light, super small, super handy. Secure crimping in seconds. With automatic circuit control. Automatic locking of the pressing tongs.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 152–183). Can be driven by all REMS radial presses 22 kN. Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 183. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong 28.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (Patent EP 1 952 948). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (Patent EP 2 347 862).

Design

Super light, super small, super handy. Drive unit with battery only 2.4 kg. Drive unit with pressing tongs V22 only 33 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Ergonomically designed housing. LED work light for illuminating the work place. Swivelling pressing tongs seat. Secure seating of pressing tongs/adapter tongs by automatic locking. Electronic charging status check with flat battery protection and charging status indicator with 2-coloured LED.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 14.4 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon PLUS technology. Highly resistant Li-lon 14.4 V battery with 2.5 or 5.0 Ah capacity for long service life. Light and powerful. Li-lon 14.4 V, 2.5 Ah batteries for approx. 275 pressings, 5.0 Ah for approx. 550 pressings Viega Profipress DN 15 with one battery charge*. Operating temperature range –10 to +60 °C. No memory effect for maximum battery power. Rapid charger 220–240 V, 10.8 –18 V, 65 W, for short charging times. Voltage supply 220–240 V/14.4 V, 33 A output, for mains operation instead of Li-lon battery 14.4 V, as accessory.

Supply format

REMS Mini-Press 14 V ACC Basic-Pack. Cordless radial press 22 kN with automatic circuit control for producing pipe pressing joints Ø 10–40 mm, Ø %–1 %". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 14.4 V, 380 W, obust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, Safety tip switch. LED work light. Battery Li-lon 14.4 V, 2.5 Ah, rapid charger 220–240 V, 50–60 Hz, 10.8–18 V, 65 W.

Version	ArtNo.	€
In sturdy steel case.	578012 R220	1.505,10
In L-Boxx system case.	578013R220	1.546,62
Other voltages on request.		







German Quality Product







Accessories

Description	ArtNo.	€
REMS pressing tongs Mini/pressing rings see page 152	– 183.	
Adapter tongs Mini Z8 for driving REMS pressing rings S (PR-2B)	574700R	144,28
REMS cropping tongs Mini for threaded rods see page 18	34.	
REMS Mini-Press 14 V ACC drive unit, without battery	578001R14	1.079,52
Battery Li-lon 14.4 V, 2.5 Ah	571545R14	160,89
Battery Li-lon 14.4 V, 5.0 Ah	571555R14	227,32
Rapid charger 220 – 240 V, 50 – 60 Hz, 10.8 – 18 V, 65 W	571560R220	154,66
Voltage supply 220-240 V/14.4 V, 50-60 Hz, 33 A, for mains operation instead of battery Li-lon 14.4 V.	571565R220	351,88
Steel case with inlay	578290R	110,03
L-Boxx system case with inserts	578299R	146,36



Universal, super handy electric tool with automatic circuit control for all common pressfitting systems. Li-lon 22V Technology. For battery and corded operation.

Pipe pressing joints

Ø 10 – 40 mm Ø 3% – 1 1/4"

Complete range of REMS pressing tongs Mini/ pressing rings for all common pressfitting systems, see page 152-183.

REMS Mini-Press 22 V ACC – universal up to Ø 40 mm. Super light, super small, super handy, ultra fast. Pressing under 4 s. With automatic circuit control, Automatic locking of pressing tongs. Li-lon 21.6 V, 2.5 Ah battery for approx. 390 pressings Viega Profipress DN 15 with one battery charge*.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 152–183). Can be driven by all REMS radial presses 22 kN. Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/ pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 183. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (Patent EP 1 952 948). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (Patent EP 2 347 862).

Design

Super light, super small, super handy. Drive unit with battery only 2.5 kg. Drive unit with pressing tongs V15 only 31 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. LED work light for illuminating the work place. Swivelling pressing tongs seat, rotation angle $>360\,^\circ$. Secure seating of pressing tongs/adapter tongs by automatic locking.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control). Ultra fast Pressing under 4 s.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6V, 2.5 Ah batteries for approx. 390 pressings, 4.4 Ah for approx. 685 pressings, 5.0 Ah for approx. 780 pressings, 9.0 Ah for approx. 1400 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220 – 240 V/1.6 V, 15 A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.







German Quality Product







Supply format

REMS Mini-Press 22 V ACC Basic-Pack. Cordless radial press 22 kN with automatic circuit control for producing pipe pressing joints Ø 10-40 mm, Ø %-1 %". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, obust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220-240 V or 110 V, 50-60 Hz, 70 W.

	,	
Version	ArtNo.	€
In sturdy steel case.	578010R220	1.785,36
In L-Boxx system case.	578014R220	1.826,88

Other voltages on request.



Accessories

Description	ArtNo.	€
REMS pressing tongs Mini/pressing rings see page 15	52-183.	
Adapter tongs Mini Z8 for driving REMS pressing rings S (PR-2B)	574700R	144,28
REMS cropping tongs Mini for threaded rods see page	184.	
REMS Mini-Press 22 V ACC drive unit, without battery	578002R22	1.266,36
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100-240 V, 50-60 Hz, 90 W	571585R220	175,42
Rapid charger 100-240 V, 50-60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A, for mains operation instead of battery Li-lon 21.6 V.	571567 R220	414,16
Steel case with inlay	578290R	110,03
L-Boxx system case with inserts	578299R	146,36
REMS Lumen 2800 22V. cordless LED flood light, see	nage 111	



All prices excl. VAT *Ambient temperature approx. 20°C. 14

Universal, super handy electric tool with automatic circuit control for all common pressfitting systems. Li-lon 22 V Technology. For battery and corded operation.

Pipe pressing joints

Ø 10 – 40 mm Ø 38 – 1 1/4"

Complete range of REMS pressing tongs Mini/ pressing rings for all common pressfitting systems, see page 152–183.

REMS Mini-Press S 22 V ACC – universal up to Ø 40 mm. Super light, super small, super handy, ultra fast. Pressing under 4 s. With automatic circuit control, Automatic locking of pressing tongs. Li-lon 21.6 V, 2.5 Ah battery for approx. 390 pressings Viega Profipress DN 15 with one battery charge*.

Pressing tongs for all common systems

Complete assortment of REMS pressing tongs Mini/pressing rings for all common pressfitting systems (page 152 – 183). Can be driven by all REMS radial presses 22 kN. Highly durable pressing tongs/pressing rings made of forged, tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 183. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong 28.

Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (Patent EP 1 952 948). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (Patent EP 2 347 862).

Design

Super light, super small, super handy. Drive unit with battery only 2.6 kg. Works anywhere, free-hand, overhead, also in particularly tight areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. LED work light for illuminating the work place. Swivelling pressing tongs seat, rotation angle > 360 °. Secure seating of pressing tongs/adapter tongs by automatic locking.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control). Ultra fast Pressing under 4 s.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 22 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon 22 V Technology. Highly resistant Li-lon 21.6 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6 V, 2.5 Ah batteries for approx. 390 pressings, 4.4 Ah for approx. 685 pressings, 5.0 Ah for approx. 780 pressings, 9.0 Ah for approx. 1400 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger $100-240\,\text{V},\,90\,\text{W}.$ Rapid charger $100-240\,\text{V},\,290\,\text{W},$ for shorter charging times, as accessory. Voltage supply $220-240\,\text{V}/21.6\,\text{V},\,15\,\text{A}$ output, for mains operation instead of Li-lon battery 21.6 V, as accessory.







German Quality Product









Supply format

REMS Mini-Press S 22 V ACC Basic-Pack. Cordless radial press 22 kN with automatic circuit control for producing pipe pressing joints Ø 10-40 mm, Ø %-1 %". For operating with REMS pressing tongs Mini/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, obust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch. LED work light. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220-240 V or 110 V, 50-60 Hz, 70 W.

Version	ArtNo.	€
In sturdy steel case.	578015R220	1.785,36
In L-Boxx system case.	578016R220	1.826,88
Other voltages on request.		

Accessories

Description	ArtNo.	€
REMS pressing tongs Mini/pressing rings see page 15	52 – 183.	
Adapter tongs Mini Z8 for driving REMS pressing rings S (PR-2B)	574700R	144,28
REMS cropping tongs Mini for threaded rods see page	184.	
REMS Mini-Press S 22V ACC drive unit, without battery	578003R22	1.266,36
Battery Li-lon 21.6 V, 2.5 Ah	571571R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100-240 V, 50-60 Hz, 90 W	571585 R220	175,42
Rapid charger 100-240V, 50-60Hz, 290W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A, for mains operation instead of battery Li-lon 21.6 V.	571567R220	414,16
Steel case with inlay	578290R	110,03
L-Boxx system case with inserts	578299R	146,36
REMS Lumen 2800 22 V. cordless LED flood light, see	page 111	



All prices excl. VAT *Ambient temperature approx. 20°C.

for all common pressfitting systems

Select REMS pressing tongs Mini/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the REMS pressing tongs Mini/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/ pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Can be driven by all REMS radial presses 22 kN. Adapter tongs (page 183) required for driving REMS pressing rings. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press (page 185) using the adapter tong Z8.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs Mini (PZ-2B)

REMS Mini pressing tongs (PZ-2B) with 2 swivellable monoblock pressing jaws. Very compact design and low weight of the REMS Mini pressing tongs due to special arrangement of the pressing tongs connection (Patent EP 1 952 948). Recesses in the pressing jaws for safe guidance of the connecting plate for offset-free pressing (Patent EP 2 347 862).

REMS Mini ACz, Fz, HEz, RFz, RFlz pressing tongs with teeth prevent formation of burr on the pressfitting (Patent EP 2 027 971).

REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 183.

Traceability according to EN 1775:2007

REMS pressing tongs Mini with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.



German Quality Product



REMS Mini pressing tongs (PZ-2B)



REMS pressing ring S (PR-2B), continuously swivellable

Confirmation of suitability

See page 239.

Hold-Harmless and Indemnification Agreement

See page 240.













Pressing tongs with teeth prevent formation of burr on the pressfitting. Patent EP 2 027 971



Example REMS pressing tongs Mini V: "V" imprint on pressed fitting for traceability according to EN 1775:2007

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
	Α			
Aalberts integrated	U 14		578372	174,38
oiping systems VSH MultiPress	U 16 U 20		578374 578378	165,66 165,66
	U 25		578380	165,66
	U 32 U 40		578382 578386	194,31 236,66
	TH 14		578348	177,08
	TH 16 TH 20		578352 R 578358 R	177,08 177,08
	TH 25		578360	177,08
	TH 32 TH 40		578364 578624	177,08 234,69
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Mini Z8 Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8	574788 R 574792 R	124,51 124,51
alle at Catanastad	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
alberts integrated iping systems	U 16 U 20		578374 578378	165,66 165,66
/SH MultiPress Gas	U 25		578380	165,66
	TH 16 TH 20		578352 R 578358 R	177,08 177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
Aalberts integrated	TH 20 S (PR-2B)** V 12	Mini Z8	574788 R 578324	124,51 146,98
iping systems	V 15		578328	146,98
'SH SudoPress Carbon	V 18 V 22		578332 578334	146,98 146,98
	V 28		578336	146,91
	V 35 V 12 S (PR-2B)	Mini 78	578604 574748 R	178,12 124,51
	V 15 S (PR-2B)	Mini Z8	574740 R 574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
alberts integrated iping systems	V 12 V 14		578324 578326	146,98 146,98
SH SudoPress Copper	VG 14		578338	146,98
	V 15 V 16		578328 578330	146,98 146,98
	VG 16		578340	146,91
	V 18 V 22		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51
	V 14 S (PR-2B)	Mini Z8	574800 R	124,51
	VG 14 S (PR-2B)	Mini Z8	574750 R	124,51
	V 15 S (PR-2B) V 16 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574802 R	124,51 124,51
	VG 16 S (PR-2B)	Mini Z8	574754 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
lalberts integrated	V 35 S (PR-2B) V 12	Mini Z8	574762 R 578324	136,98
iping systems	V 14		578326	146,98
SH SudoPress Copper as	VG 14 V 15		578338 578328	146,91 146,91
103	V 16		578330	146,78
	VG 16		578340	146,98
	V 18 V 22		578332 578334	146,91 146,91
	V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51
	V 14 S (PR-2B)	Mini Z8	574800 R	124,5
	VG 14 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini Z8	574750 R 574752 R	124,5° 124,5°
	V 16 S (PR-2B)	Mini Z8	574802 R	124,5
	VG 16 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574754 R 574756 R	124,5° 124,5°
	V 22 S (PR-2B)	Mini Z8	574758 R	124,5
	V 28 S (PR-2B)	Mini Z8	574760 R	124,5
alberts integrated	V 35 S (PR-2B) V 15	Mini Z8	574762 R 578328	136,9 146,9
iping systems	V 18		578332	146,9
SH SudoPress tainless	V 22 V 28		578334 578336	146,9 146,9
tunitess	V 35		578604	178,1
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R	124,5
	V 22 S (PR-2B)	Mini Z8	574756 R 574758 R	124,5 124,5
	V 28 S (PR-2B)	Mini Z8	574760 R	124,5
alberts integrated	V 35 S (PR-2B) M 12	Mini Z8	574762 R 578310	136,9 146,9
iping systems	M 15		578312	146,9
SH XPress Carbon	M 18 ¹⁾ M 22		578314 578316	146,9 146,9
	M 28 ¹⁾		578318	146,9
	M 35	M:-: 70	578390	178,12
	M 12 S (PR-2B) M 15 S (PR-2B)	Mini Z8 Mini Z8	574736 R 574738 R	124,5° 124,5°
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Aalberts integrated	M 12	,	578310	146,98
piping systems	M 15		578312	146,98
VSH XPress Copper	M 18 ¹⁾		578314	146,98
	M 22 M 28 ¹⁾		578316 578318	146,98 146,98
	M 35		578390	178,12
	M 12 S (PR-2B)	Mini Z8	574736 R	124,51
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574744 R 574746 R	124,51 136,96
Aalberts integrated	M 15		578312	146,98
piping systems	M 18 ¹⁾		578314	146,98
VSH XPress Copper	M 22		578316	146,98
Gas	M 28 ¹⁾		578318	146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
Aalberts integrated	M 15		578312	146,98
piping systems VSH XPress Stainless	M 18 ¹⁾ M 22		578314 578316	146,98 146,98
VOII AI 1633 Staillte33	M 28 ¹⁾		578318	146,98
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
Aalberts integrated	M 15	eam zv	578312	146,98
piping systems	M 18 ¹⁾		578314	146,98
VSH XPress Stainless			578316	146,98
Gas	M 28 ¹⁾		578318	146,98
	M 35	W: : 70	578390	178,12
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
AC-FIX PRESS	H 12		578396	159,75
(Global Piping	H 16		578400	159,75
Systems)	H 20 H 25		578406 578408	159,75 159,75
	H 32		578412	159,75
	RFz 12		578490	184,45
	RFz 16		578492	184,45
	RFz 20		578494	184,45
	RFz 25		578496	184,45
	RFz 32 U 16		578498 578374	184,45 165,66
	U 20		578378	165,66
	U 25		578380	165,66
	U 32		578382	194,31
	VX 16		578552	204,17
	VX 20		578554	204,17
AC-FIX PRESS DUO	RFz 16 RFz 20		578492 578494	184,45 184,45
(Global Piping Systems)	RFz 25		578496	184,45
Dystems,	RFz 32		578498	184,45
	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 25		578360	177,08
	TH 26 TH 32		578362 R	177,08
	TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16		578374	165,66
	U 20 U 25		578378 578380	165,66 165,66
	U 32		578382	194,31
AC-FIX PRESS-MULTI	H 16		578400	159,75
Global Piping	H 18		578404	159,75
Systems)	H 20		578406	159,75
	H 25		578408	159,75
	H 32		578412 578492	159,75
	RFz 16 RFz 20		578492 578494	184,45 184,45
	RFz 25		578496	184,45
	RFz 32		578498	184,45
	U 16		578374	165,66
	U 18		578376	165,66
	U 20		578378	165,66
	U 25		578380	165,66
ACOME NT	U 32		578382	194,31
ACOME MT	ACz 12 ACz 16		578608 578610	184,45 184,45
			578610 578612	184,45
	ACz 20			

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System
AHLSELL	M 12		578310	146,98	ALB
A-press elförzinkad M	M 15 M 18		578312 578314	146,98 146,98	Sistema Multi
	M 22		578316	146,98	para calefaco
	M 28		578318	146,98	sanitario
	M 35		578390	178,12	
	M 12 S (PR-2B)	Mini Z8	574736 R	124,51	
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51	
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51	
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51	
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96	
AHLSELL	V 12		578324	146,98	
A-press	V 15		578328	146,98	
elförzinkad V	V 18		578332	146,98	
	V 22 V 28		578334	146,98 146,98	
	V 35		578336 578604	178,12	
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51	
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51	
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51	
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51	
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51	
AULOFLI	V 35 S (PR-2B)	Mini Z8	574762 R	136,96	
AHLSELL A-press koppar M	M 12 M 15		578310 578312	146,98 146,98	ALB
M-hiess kohhai M	M 18		578314	146,78	Sistema Mult
	M 22		578316	146,98	para gas
	M 28		578318	146,98	
	M 35		578390	178,12	
	M 12 S (PR-2B)	Mini Z8	574736 R	124,51	
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51	
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51	
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51	
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96	
AHLSELL	V 12		578324	146,98	
A-press koppar V	V 15		578328	146,98	
	V 18		578332	146,98	
	V 22		578334	146,98	
	V 28 V 35		578336 578604	146,98 178,12	
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51	
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51	ALTECH Altec
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51	
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51	
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51	
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96	APE MULTYGA
AHLSELL A-press rostfritt	M 15		578312	146,98	Serie AP Gas
A-press rostiritt	M 18 M 22		578314 578316	146,98 146,98	
	M 28		578318	146,98	
	M 35		578390	178,12	
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51	
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51	
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51	APE Serie AP
	M 28 S (PR-2B)	Mini Z8 Mini Z8	574744 R	124,51	AFE SELIE AF
AIRBEL	M 35 S (PR-2B) M 15	MIIII ZO	574746 R 578312	136,96 146,98	
PRESSCLIM	M 18		578314	146,78	
	M 22		578316	146,98	
	M 28		578318	146,98	
	M 35		578390	178,12	
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51	
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51	
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51	
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96	
AIRBEL	M 15	20	578312	146,98	
SERTINOX	M 18		578314	146,98	
	M 22		578316	146,98	
	M 28		578318	146,98	
	M 35		578390	178,12	
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51	
	M 18 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51	
		MIDI /X	5 16 16 7 R	1/// 51	
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8	574744 R	124,51	

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
ALB	TH 16		578352 R	177,08
Sistema Multicapa	TH 18		578356	177,08
para calefacción y	TH 20		578358 R	177,08
sanitario	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	H 16		578400	159,75
	H 18		578404	159,75
	H 20		578406	159,75
	H 26		578410	159,75
	H 32		578412	159,75
	U 16		578374	165,66
	U 18		578376	165,66
	U 20		578378 578392	165,66
	U 26 ⁷⁾			194,31
	U 32		578382	194,31
ALD.	U 40		578386	236,66
ALB	TH 16		578352 R 578358 R	177,08
Sistema Multicapa	TH 20 TH 26		578362 R	177,08 177,08
para gas	TH 32		578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574774 R	136,96
	H 16	MIIII 20	578400	159,75
	H 20		578406	159,75
	H 26		578410	159,75
	H 32		578412	159,75
	U 16		578374	165,66
	U 20		578378	165,66
	U 26 ⁷⁾		578392	194,31
	U 32		578382	194,31
ALTECH Altech	RFz 12		578490	184,45
712.2011711.0011	RFz 16		578492	184,45
	RFz 20		578494	184,45
	RFz 25		578496	184,45
APE MULTYGAS	TH 16		578352 R	177,08
Serie AP Gas	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
APE Serie AP	B 16		578468	193,28
	B 20		578472	193,28
	B 26		578474	213,00
	B 32		578476	213,00
	H 16		578400	159,75
	H 20		578406	159,75
	H 26		578410	159,75
	H 32		578412	159,75
	TH 16		578352 R	177,08
	TH 18		578356	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574774 R	136,96
		20		
	U 16		578374	165,66

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

All prices excl. VAT

APE Serie API H 16 H 18 H 18 H 19 H 20 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 STA404 S	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
H 20	APE Serie APL	H 16			159,75
H 25					159,75
H 26					159,75
THE		H 26			159,75
TH 18					159,75
14 10 778398 1770 1770 1782 178304 1770 1782 178304 1770 1782 178304 1770 1782 178304 1770 1782 178304 1770 1782 178304 1770 178304 1770 178304 1770 178304 1770 178304 1770 178304 1770 178304 1770 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 178304 1783					
THE STATE					177,08
TH 22		TH 25		578360	177,08
TH 16 (PR-28)** Mini 28					177,08
TH 18 \$(Pe-20)** Mini 28			Mini 78		
TH 20 S(Pe-20)** Min 28					124,51
TH 25 (PR-28)		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
H 25 (PR-28)					124,51
D16 \$78274 16.56 \$78276 16.56 \$78276 16.56 \$78278 16.56 \$78278 16.56 \$78278 16.56 \$78278 16.56 \$78278 16.56 \$78278 16.56 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$78288 17.97 \$782888 17.97 \$782888 17.97 \$782888 17.97 \$782888 17.97 \$782888 17.97 \$782888					
18			Pillii 20		165,66
ADUATECHNIK H 16		U 18		578376	165,66
Press-fitting metal					165,66
H 26 H 32 H 140 H 32 H 140 H 32 H 140 H 32 H 140 H 32 H 140 H 32 H 140 H 32 H 140 H 32 H 140 H 32 H 140 H 32 H 340 H 32 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340 H 340					
H 32	riess-iittiily illetat				159,75
TH 20					159,75
The 26					177,08
TH 32 S PR-28 177.0 TH 16 S PR-28 177.0 TH 16 S PR-28 177.0 TH 26 S PR-28 177.0 TH 26 S PR-28 177.0 TH 27 S PR-28 177.0 TH 28 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32 S PR-28 177.0 TH 32					177,08
TH 14 S PR - 2B ** Mini 2B		****			
TH 25 (PR-2B)** Mini 28 574798 R 124.5 PR-2B) U14 578378 165.6 U20 578378 165.6 U20 578378 165.6 U20 578378 165.6 U20 578378 165.6 U20 578378 165.6 U20 578378 165.6 U20 578378 165.6 U20 578382 194.3 U32 578382 194.3 U32 578472 193.2 U32 578472 193.2 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578474 213.0 U32 578464 182.4 U32 578464 182.4 U32 578464 182.4 U32 578464 182.4 U32 578464 182.4 U32 578464 182.4 U32 578464 182.4 U32 578464 182.4 U32 578464 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4 U32 57846 182.4			Mini Z8		124,51
TH 22 S (PR-2B) Mini 2B 574798 R 13.6.9 U 10 16 578374 16.5.6 U 20 578374 16.5.6 U 20 578378 16.5.6 U 20 578378 16.5.6 U 20 578378 16.5.6 U 20 578468 19.3.7 Universal B 20 578467 19.3.7 B 24 578467 19.3.7 B 24 578467 19.3.7 B 25 578468 19.3.7 B 26 578464 18.2.6 F 20 578466 16.8.6 F 20 578466 16.8.6 F 20 578466 16.8.6 F 20 578466 16.8.6 F 20 578468 19.3.7 F 16 578468 19.3.7 F 16 578468 19.3.7 F 16 578468 19.3.7 F 26 578468 19.3.7 F 26 578468 19.3.7 F 26 578468 19.3.7 F 27 578468 19.3.7 F 28 5 (PR-2B)** Mini 2B 5747318 12.4.5 F 28 5 (PR-2B)** Mini 2B 5747318 13.6.9 H 20 578468 15.97 H 10 578468 15.97 H 11 6 578458 17.70 H 12 0 578468 15.97 H 12 0 578468 15.97 H 12 0 578468 15.97 H 12 0 578458 17.70 H 12 0 578458 17.70 H 12 0 578458 17.70 H 12 0 578458 17.70 H 13 2 (PR-2B)** Mini 2B 574798 12.4.5 F 14 26 578468 15.97 H 14 26 578468 15.97 H 15 26 (PR-2B)** Mini 2B 574798 12.4.5 H 14 20 578468 15.97 H 15 20 (PR-2B)** Mini 2B 574798 12.4.5 H 14 20 578458 17.70 H 12 0 578458 17.70 H 12 0 578458 17.70 H 12 0 578458 17.70 H 12 0 578458 17.70 H 12 0 578458 17.70 H 13 25 (PR-2B)** Mini 2B 574798 12.4.5 H 14 25 578468 15.97 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 14 20 578468 15.97 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 14 20 578468 15.97 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 14 20 578468 15.97 H 14 20 578468 15.97 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 14 20 578468 15.97 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 15 5 (PR-2B)** Mini 2B 574798 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 15 5 (PR-2B)** Mini 2B 574748 12.4.5 H 16 5 (PR-2B)** Mini 2B 574748 12.4.5 H 17 5 (PR-2B)** Mini 2B 574748					124,51
U16 U20 S78378 H55.6 U20 U287 S78378 H55.6 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78378 H55.7 S78468 H52.7 S78474 F13.0 S78474 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 F13.0 S78476 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H16.0 S78478 H17.0 S78478 H17.0 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78478 H18.2 S78480 S78478 H18.2 S78480 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3 S78488 H18.3					124,51
U 20			Mini 28		
U 268					165,66
ADUATECHNIX B 16 B 20 S 78474 B 210 S 78476 F 102 S 78467 F 103 F 166 F 20 F 26 F 26 F 26 F 26 F 27 F 165 (PR-2B)** Mini Z 8 F 20 S 78476 F 20 S 78460 168.6 F 20 F 26 F 27 F 165 (PR-2B)** Mini Z 8 F 27 S 78464 B 24 F 29 S (PR-2B)** Mini Z 8 F 29 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR-2B)** Mini Z 8 F 20 S (PR					194,31
Universal					194,31
B 26 B 27 B 27 B 27 B 28 B 27 B 27 B 28 B 27 B 28 B 28 B 27 B 28 B 28 B 28 B 28 B 28 B 28 B 28 B 28					193,28
B 32	Ulliversat				
F 20					213,00
F 26 F 32 F 16 S (PR-2B)** F 16 S (PR-2B)** F 16 S (PR-2B)** Mini 28 F 20 S (PR-2B)** Mini 28 F 20 S (PR-2B)** Mini 28 F 22 S (PR-2B)** Mini 28 F 22 S (PR-2B) Mini 28 F 32 S (PR-2B) Mini 28 F 32 S (PR-2B) Mini 28 F 32 S (PR-2B) Mini 28 F 32 S (PR-2B) H 16 F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 28 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37 S (PR-2B) F 37				578456	168,68
F 32					168,68
F 16 S (PR-2B)** Mimi 28 574728 R 124.5 F 20 S (PR-2B)** Mimi 28 574730 R 124.5 F 20 S (PR-2B)** Mimi 28 574730 R 124.5 F 32 S (PR-2B) Mimi 28 574732 R 124.5 F 32 S (PR-2B) Mimi 28 574732 R 124.5 F 32 S (PR-2B) Mimi 28 574734 R 136.9 F 32 S (PR-2B) Mimi 28 574734 R 136.9 F 32 S (PR-2B) Mimi 28 574734 R 126.5 F 37840 5 5 7 8 8 15 7 7 8 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1					
F 20 S (PR-2B)** Mini 28 574730 R 124,5 F 26 S (PR-2B)** Mini 28 574732 R 124,5 F 36 S (PR-2B) Mini 28 574734 R 136,6 H 16 579400 159,7 H 26 579400 159,7 H 26 579400 159,7 H 26 579400 159,7 H 27 579400 159,7 H 28 579400 159,7 H 29 579400 159,7 H 20 579400 159,7 H 20 579400 159,7 H 16 579352 R 177,0 TH 16 579352 R 177,0 TH 120 579352 R 177,0 TH 120 579352 R 177,0 TH 25 (PR-2B)** Mini 28 574788 R 124,5 TH 25 S (PR-2B)** Mini 28 574798 R 136,9 U 26 ²⁰ 578374 165,6 U 20 578372 194,3 U 32 578392 194,3 U 32 578392 194,3 U 32 578392 194,3 U 34 579400 159,7 U 35 579410 159,7 H 25 579410 159,7 TH 16 579410 159,7 TH 26 579410 159,7 TH 27 579410 159,7 TH 28 579410 159,7 TH 28 579410 159,7 TH 29 579410 159,7 TH 20 579410 159,7 TH 20 579410 159,7 TH 20 579410 159,7 TH 20 579410 159,7 TH 25 579410 159,7 TH 26 579410 159,7 TH 27 579392 177,0 TH 26 579352 R 177,0 TH 27 579396 T 177,0 TH 28 579410 159,7 TH 29 579410 159,7 TH 26 579410 159,7 TH 27 579396 T 177,0 TH 28 579410 159,7 TH 29 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 25 579396 T 177,0 TH 26 579396 T 177,0 TH 27 579399 T 177,0 TH 28 579399 T 177,0 TH 28 579399 T 177,0 TH 29 579399 T 177,0 TH 29 579399 T 177,0 TH 29 579399 T 177,0 TH 29 579399 T 177,0 TH 29 579399 T 177,0 TH 29 579399 T 177,0 TH 25 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 177,0 TH 26 579399 T 17			Mini Z8		124,51
F 22 S(PR-2B)				574730 R	124,51
H 16					124,51
H 20 H 20 H 20 H 20 H 32 TH 16 H 32 TH 16 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 32 TH 16 S [PR-2B]** Mini Z8 TH 26 S [PR-2B]** Mini Z8 TH 25 S [PR-2B] Mini Z8 TH 32 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 32 S [PR-2B] Mini Z8 TH 33 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH 34 S TH			Mini 28		
H 26 H 32 H 32 H 140 H 157 H 16 TH 20 TH 16 TH 20 TH 26 TH 26 TH 37 TH 16 TH 27 TH 16 TH 27 TH 16 TH 27 TH 16 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 2					159,75
TH 16		H 26			159,75
TH 20 TH 26 TH 32 TH 32 TH 16 (PR-2B)** TH 16 (PR-2B)** TH 12 (S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 32 S (PR-2B) TH 33 S (PR-2B) TH 35 S (PR-2B) TH 35 S (PR-2B) TH 36 S (PR-2B) TH 37 S (PR-2B) TH 38 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2B) TH 39 S (PR-2					159,75
TH 26 TH 32 TH 16 (PR-2B)** TH 16 (PR-2B)** TH 16 (PR-2B)** TH 16 (PR-2B)** TH 120 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 22 S (PR-2B) U 16 U 20 S 578374 165.6 U 20 S 578372 U 32 U 32 S 578382 U 32 ARKA H 16 UUROSystem H 20 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578400 S 578360 S 578360 S 578360 S 578360 S 578360 S 578378 S 68.6 S 68.6 S 68.7 S 68.6 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7 S 68.7					
TH 32 TH 16 S (PR-2B)** Mini Z8 574782 R 124,5 TH 20 S (PR-2B)** Mini Z8 574794 R 124,5 TH 26 S (PR-2B)** Mini Z8 574794 R 124,5 TH 32 S (PR-2B) Mini Z8 574794 R 124,5 TH 32 S (PR-2B) Mini Z8 574798 R 136,6 U 20 578374 165,6 U 20 578378 165,6 U 20 578379 194,3 U 32 578392 194,3 ARKA H 16 578400 159,7 H 25 578406 159,7 H 26 578406 159,7 H 26 578406 159,7 H 26 578406 159,7 TH 16 578406 159,7 TH 16 578406 159,7 TH 16 578406 159,7 TH 16 578406 159,7 TH 16 578406 159,7 TH 16 578406 159,7 TH 16 578406 159,7 TH 16 578407 195,7 TH 16 578407 195,7 TH 16 578407 195,7 TH 16 578407 195,7 TH 16 578407 195,7 TH 16 578407 195,7 TH 16 578407 195,7 TH 26 578408 195,7 TH 26 578408 195,7 TH 26 578408 195,7 TH 26 578360 177,0 TH 26 578360 177,0 TH 26 578360 177,0 TH 26 578360 177,0 TH 27 578364 177,0 TH 28 578408 195,7 TH 29 S (PR-2B)** Mini Z8 574792 R 124,5 TH 20 S (PR-2B)** Mini Z8 574794 R 124,5 TH 32 S (PR-2B)** Mini Z8 574798 R 136,9 U 20 578378 165,6 Aschl NIR M 15 578312 146,9 M 28 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 M 28 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR 378 H 46,9 TR 35 FR-2B) Mini Z8 574744 R 124,5 TR 35 FR 378 H 46,9 TR 35 FR-2B) Mini Z8 574740 R 124,5 TR 35 FR 378 H 46,9 TR 35 FR-2B) Mini Z8 574740 R 124,5 TR 35 FR 378 H 46,9 TR 35 FR 378 H 46,9 TR 35 FR 378 H 46,9 TR 35 FR 378 H 46,9 TR 35 FR 378 H 46,9 TR 35 FR 378 H 46,9 TR 35 FR 378 H 46,9 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 TR 378 T					177,08
TH 20 S (PR-2B)** Mini 28 574788 R 124,5 TH 32 S (PR-2B)** Mini 28 574798 R 124,5 TH 32 S (PR-2B) Mini 28 574798 R 124,5 U 16 578374 165,6 U 20 578378 165,6 U 20 578378 165,6 U 20 578378 165,6 U 20 578378 165,6 U 32 578382 194,3 ARKA H 16 578362 194,3 ARKA H 16 578400 159,7 H 25 578400 159,7 H 26 578401 159,7 H 27 578400 159,7 H 28 578401 159,7 H 29 578410 159,7 H 20 578410 159,7 TH 16 578352 177,0 TH 20 578352 177,0 TH 20 578352 177,0 TH 20 578352 177,0 TH 20 578352 177,0 TH 25 578360 177,0 TH 26 578362 177,0 TH 26 578362 177,0 TH 27 578362 177,0 TH 28 578364 177,0 TH 29 S (PR-2B)** Mini 28 574782 R 124,5 TH 20 S (PR-2B)** Mini 28 574792 R 124,5 TH 32 S (PR-2B)** Mini 28 574794 R 124,5 TH 32 S (PR-2B)** Mini 28 574794 R 124,5 TH 32 S (PR-2B) Mini 28 574794 R 124,5 TH 32 S (PR-2B) Mini 28 578374 165,6 M 28 578374 165,6 M 28 578378 144,9 M 28 578316 146,9 M 35 578390 178,1 M 15 S (PR-2B) Mini 28 574740 R 124,5 M 28 578316 146,9 M 35 578390 178,1 M 18 S (PR-2B) Mini 28 574746 R 124,5 M 28 578316 146,9 M 38 S (PR-2B) Mini 28 574746 R 124,5 M 28 578316 146,9 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 28 578316 146,9 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 28 578316 146,9 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 29 S (PR-2B) Mini 28 574746 R 124,5 M 38 S (PR-2B) Mini 28 574746 R 124,5 M 38 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574746 R 124,5 M 39 S (PR-2B) Mini 28 574742 R 124,5 M 39 S (PR-2B) Mini 28 574742 R 124,5 M 39 S (PR-2B) Mini 28 57					177,08
TH 26 S (PR-2B)** Mini 28 574798 R 124.5 TH 32 S (PR-2B) Mini 28 574798 R 134.9 U 10 U 20 578378 165.6 U 20 U 20 S78378 165.6 U 20 S78379 194.3 ARKA H 16 U 20 578400 159.7 BUROsystem H 20 578406 159.7 H 25 578406 159.7 H 26 578410 159.7 H 126 578410 159.7 TH 16 578352 R 177.0 TH 25 578410 159.7 TH 16 578358 R 177.0 TH 20 578358 R 177.0 TH 20 578358 R 177.0 TH 25 578360 177.0 TH 26 578360 177.0 TH 27 578360 177.0 TH 28 578360 177.0 TH 29 S (PR-2B)** Mini 28 574782 R 124.5 TH 20 S (PR-2B)** Mini 28 574798 R 134.6 U 20 578378 165.6 Aschl NIR M 15 57831 146.9 M 22 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 35 (PR-2B) Mini 28 574788 R 124.5 TR 38 578316 146.9 M 28 578316 146.9 M 28 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 39 578316 146.9 M 30 578316 146.9 M 31 M 31 M 31 M 31 M 31 M 31 M 31 M 3					124,51
TH 32 S (PR-2B) U16 U20 578374 16.56 U 20 578372 16.56 U 26 ⁷⁾ 578392 194.3 ARKA H 16 DUROsystem H 20 578400 159.7 H 26 H 26 179.0 189.2 189.2 189.3 189.3 ARKA H 16 DUROsystem H 20 578408 159.7 H 26 179.0 170 170 170 170 170 171 170 170 171 170 170 170 171 170 170 170 171 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170 170					
U 16					136,96
U 26 ⁷⁰		U 16		578374	165,66
Name					165,66
ARKA H 16 DUROsystem H 20 S78406 159,7 H 25 H 26 S78410 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78408 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 159,7 F78412 1					
DUROsystem H 20 H 25 H 26 H 32 TH 16 TH 32 TH 16 TH 20 TH 25 TH 20 TH 25 TH 20 TH 25 TH 20 TH 25 TH 26 TH 25 TH 26 TH 25 TH 26 TH 27 TH 28 TH 28 TH 28 TH 28 TH 28 TH 29 TH 28 TH 29 TH 29 TH 29 TH 29 TH 29 TH 29 TH 29 TH 29 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 T	ARKA				159,75
H 26					159,75
H 32 TH 16 TH 20 TH 20 TH 20 TH 25 TH 25 TH 25 TH 25 TH 25 TH 25 TH 25 TH 32 TH 16 S(PR-2B)** TH 20 S(PR-2B)** TH 20 S(PR-2B)** Mini 28 TH 28 S(PR-2B)** Mini 28 TH 28 S(PR-2B)** Mini 28 TH 27 S(PR-2B)** Mini 28 TH 28 S(PR-2B)** Mini 28 TH 29 S(PR-2B)** Mini 28 TH 29 S(PR-2B)** Mini 28 TH 29 S(PR-2B)** Mini 28 TH 29 S(PR-2B)** Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 32 S(PR-2B) Mini 28 TH 34 S(PR-2B) Mini 28 TH 35 S(PR-2B) Mini 28 TH 35 S(PR-2B) Mini 28 TH 36 ST4742 TH 36.9 ASSOTHERM M 35 S(PR-2B) Mini 28 TH 36 ST4742 TH 36.9 ASSOTHERM M 35 S(PR-2B) Mini 28 TH 36 ST8314 TH 46.9 M 36 S(PR-2B) Mini 28 TH 36 ST8314 TH 46.9 M 37 S(PR-2B) Mini 28 TH 36 ST8314 TH 46.9 M 37 S(PR-2B) Mini 28 TH 36 ST8314 TH 46.9 M 37 S(PR-2B) Mini 38 TH 36 ST8314 TH 46.9 M 37 S(PR-2B) Mini 38 TH 36 ST8314 TH 46.9 M 37 ST8314 TH 46.9 M 37 ST8314 TH 46.9 M 37 ST8314 TH 46.9 M 37 ST8314 TH 46.9 M 38 S(PR-2B) Mini 28 TH 37 TH 38 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 37 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38 STR 37 TH 46.9 M 38					159,75
TH 16 TH 20 TH 20 TH 20 TH 25 TH 25 TH 26 TH 25 TH 26 TH 32 TH 32 TH 18 TH 18 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 28 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 32 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38 TH 38					
TH 20 TH 25 TH 25 TH 25 TH 26 TH 26 TH 26 TH 32 TH 32 TH 16 S (PR-2B)** TH 10 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** Mini 28 TH 26 S (PR-2B)** Mini 28 TH 26 S (PR-2B)** Mini 28 TH 26 S (PR-2B)** Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 28 TH 32 S (PR-3B) Mini 35 S (PR-3B) Mini 35 S (PR-3B) Mini 35 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 34 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) Mini 38 TH 35 S (PR-3B) MINI 38 S (PR-3B) MINI 38 S (PR-3B) MINI 38 S (PR-3B) MINI 38 S (PR-3B) MINI 38 S (PR-3B) MINI 3					177,08
TH 26 TH 32 TH 32 TH 16 S (PR-2B)** TH 16 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** Mini 28 TH 26 S (PR-2B)** Mini 28 TH 26 S (PR-2B)** Mini 28 TH 27 S (PR-2B)** Mini 28 TH 28 S (PR-2B)** Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 32 S (PR-2B) Mini 28 TH 35 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH 36 S TH		TH 20			177,08
TH 32					177,08
TH 16 S (PR-2B)** Mini 28 574782 R 124,5 TH 20 S (PR-2B)** Mini 28 574788 R 124,5 TH 25 S (PR-2B)** Mini 28 574794 R 124,5 TH 25 S (PR-2B)** Mini 28 574794 R 124,5 TH 32 S (PR-2B) Mini 28 574794 R 134,9 U 16 578374 165,6 U 20 578374 165,6 U 20 578374 165,6 U 20 578374 165,6 U 20 578312 146,9 M 18 578314 146,9 M 22 578316 146,9 M 28 578318 146,9 M 35 578318 146,9 M 35 578318 146,9 M 18 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574742 R 124,5 M 28 574744 R 124,5 M 28 578314 146,9 M 28 574744 R 124,5 M 28 578316 146,9 M 28 578316 146,9 M 28 578316 146,9 M 28 578316 146,9 M 28 578316 146,9 M 28 578316 146,9 M 28 578316 146,9 M 35 578316 146,9 M 35 578316 146,9 M 35 578316 146,9 M 36 578316 146,9 M 37 578316 146,9 M 38 578316 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9					
TH 20 S (PR-2B)** Mini 28 574788 R 124,5 TH 25 S (PR-2B)** Mini 28 574792 R 124,5 TH 26 S (PR-2B)** Mini 28 574792 R 124,5 TH 32 S (PR-2B) Mini 28 574798 R 136,9 U 16 578374 165,6 U 20 578378 165,6 Aschl NIR M 15 578312 146,9 M 22 578316 146,9 M 22 578316 146,9 M 28 578318 146,9 M 35 578318 146,9 M 35 578318 146,9 M 18 S (PR-2B) Mini 28 57438 R 124,5 M 18 S (PR-2B) Mini 28 574742 R 124,5 M 28 578744 R 124,5 M 28 578744 R 124,5 M 28 578744 R 124,5 M 28 578314 146,9 M 29 578746 R 136,9 M 29 578746 R 136,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578316 146,9 M 20 578318 146,9 M 20 578318 146,9 M 20 578318 146,9 M 20 578318 146,9 M 35 578390 178,1 M 18 S (PR-2B) Mini 28 57438 R 124,5 M 35 578319 146,9 M 35 578319 146,9 M 36 578318 146,9 M 378 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38 578318 146,9 M 38			Mini 78		124,51
TH 26 S (PR-2B)** Mini 28 574794 R 124,5 TH 32 S (PR-2B) Mini 28 574798 R 136,9 U 16 578378 165,6 U 20 578378 165,6 S 78378 165,6 S 78378 165,6 S 78378 165,6 S 78378 165,6 S 78378 165,6 S 78378 165,6 S 78378 165,6 S 78378 165,6 S 78312 146,9 M 22 578316 146,9 M 28 578318 146,9 M 35 578318 146,9 M 15 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5 M 35 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 18 S (PR-2B) Mini 28 578314 146,9 M 28 S 78314 146,9 M 28 S 78316 146,9 M 35 S 78390 178.1 M 18 S (PR-2B) Mini 28 578390 178.1 M 18 S (PR-2B) Mini 28 574338 R 124,5 M 18 S (PR-2B) Mini 28 574338 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18					124,51
TH 32 S (PR-2B) U16 U16 U170 S78374 165.6 U190 S78373 165.6 S78373 165.6 S78373 165.6 S78373 165.6 S78373 165.6 S78373 165.6 S78373 165.6 S78372 146.9 S78314 146.9 M 18 M 18 M 18 M 22 S78316 146.9 M 28 S78318 146.9 M 35 S78390 178.1 M 15 S (PR-2B) Mini 28 S74740 R 124.5 M 22 S (PR-2B) Mini 28 S74740 R 124.5 M 28 S (PR-2B) Mini 28 S74744 R 124.5 M 28 S (PR-2B) Mini 28 S74744 R 124.5 M 35 S (PR-2B) Mini 28 S74746 R 124.5 M 35 S (PR-2B) Mini 28 S74746 R 124.5 M 35 S (PR-2B) Mini 28 S78314 146.9 S78314 146.9 S78314 146.9 M 28 M 28 M 35 M 18 S78316 M 46.9 M 28 M 38 M 38 M 38 M 38 M 38 M 38 M 38 M 3					124,51
U 16					124,51
U 20 578378 165,6 Aschl NIR			MIIII ZO		
M 18					165,66
M 22 578316 146,9 M 28 578318 146,9 M 35 178318 146,9 M 15 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5 M 28 S (PR-2B) Mini 28 574742 R 124,5 M 28 S (PR-2B) Mini 28 574742 R 124,5 M 35 S (PR-2B) Mini 28 574746 R 136,9 ASSOTHERM M 15 578312 146,9 M 26 578314 146,9 M 27 578316 146,9 M 28 578318 146,9 M 28 578318 146,9 M 35 M 35 578390 1781, M 18 S (PR-2B) Mini 28 574748 R 124,5 M 18 S (PR-2B) Mini 28 574748 R 124,5 M 18 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574748 R 124,5 M 18 S (PR-2B) Mini 28 574742 R 124,5 M 18 S (PR-2B) Mini 28 574742 R 124,5	Aschl NIR	M 15		578312	146,98
M 28 578318 146,9 M 35 78390 178,1 M 15 S (PR-2B) Mini 28 574738 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5 M 28 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 134,9 ASSOTHERM M 15 578312 146,9 HPC-RAC M 18 578314 146,9 M 28 578314 146,9 M 28 578314 146,9 M 28 578316 146,9 M 28 578318 146,9 M 35 78319 178,1 M 15 S (PR-2B) Mini 28 574338 R 124,5 M 18 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 18 S (PR-2B) Mini 28 574742 R 124,5					146,98
M 35 (PR-2B) Mini 28 574398 178.1 Mini 28 578390 178.1 Mini 28 574348 R 124.5 M 18 S (PR-2B) Mini 28 574748 R 124.5 M 28 S (PR-2B) Mini 28 574742 R 124.5 M 28 S (PR-2B) Mini 28 574744 R 124.5 M 35 S (PR-2B) Mini 28 574746 R 136.9 Mini 28 574746 R 136.9 Mini 28 574746 R 136.9 Mini 28 578314 14.9 Mini 28 578314 14.9 Mini 28 578314 14.9 Mini 28 578314 14.9 Mini 28 578314 14.9 Mini 28 578318 14.9 Mini 28 578318 14.9 Mini 28 578318 14.9 Mini 28 578318 14.9 Mini 28 578318 14.9 Mini 28 578318 14.9 Mini 28 578318 14.9 Mini 28 578318 14.9 Mini 28 578318 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R 124.5 Mini 28 574742 R					146,98
M 15 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5 M 28 S (PR-2B) Mini 28 574742 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574746 R 136,9 ASSOTHERM M 15 578312 146,9 IPC-RAC M 18 578314 146,9 Carbon Steel M 22 578316 146,9 M 28 578318 146,9 M 35 578318 146,9 M 35 578318 146,9 M 35 578318 146,9 M 36 578318 146,9 M 18 S (PR-2B) Mini 28 574748 R 124,5 M 18 S (PR-2B) Mini 28 574748 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5					178,12
M 18 S (PR-2B) Mini 28 574740 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5 M 28 S (PR-2B) Mini 28 574742 R 124,5 M 35 S (PR-2B) Mini 28 574746 R 124,5 M 35 S (PR-2B) Mini 28 574746 R 136,9 ASSOTHERM M 15 578312 146,9 M 16 578314 146,9 M 28 578316 146,9 M 28 578318 146,9 M 35 578316 146,9 M 35 578318 146,9 M 35 578318 146,9 M 35 578318 146,9 M 35 578318 146,9 M 35 578318 146,9 M 18 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 24 S (PR-2B) Mini 28 574742 R 124,5		M 15 S (PR-2B)	Mini Z8		124,51
M 28 S (PR-2B) Mini 28 574744 R 124,5 M 35 S (PR-2B) Mini 28 574744 R 136,9 ASSOTHERM M 15 IPC-RAC M 18 578314 146,9 Carbon Steel M 22 578316 146,9 M 28 578316 146,9 M 35 M 35 578318 146,9 M 35 M 35 578318 146,9 M 18 S (PR-2B) Mini 28 574338 R 124,5 M 18 S (PR-2B) Mini 28 574742 R 124,5 M 28 574742 R 124,5		M 18 S (PR-2B)	Mini Z8		124,51
M 35 S (PR-2B) Mini 28 574746 R 136,9 ASSOTHERM M 15 578312 146,9 IPC-RAC M 18 578314 146,9 Carbon Steel M 22 578316 146,9 M 28 578318 146,9 M 35 578390 1781, M 15 S (PR-2B) Mini 28 574748 R 124,5 M 18 S (PR-2B) Mini 28 574748 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5					124,51
ASSOTHERM M 15 578312 146,9 IPC-RAC M 18 578314 146,9 IPC-RAC M 18 578314 146,9 M 28 578316 146,9 M 38 578318 146,9 M 35 578390 178,1 M 15 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5					124,51 136,96
PC-RAC M 18 578314 14.6,9 Carbon Steel M 22 578316 146,9 M 28 578318 14.6,9 M 35 578318 14.6,9 M 15 S (PR-2B) Mini 28 578338 124,5 M 18 S (PR-2B) Mini 28 574738 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5	ASSOTHERM		20		146,98
M 28 578318 146,9 M 35 578390 178,1 M 15 S (PR-2B) Mini 28 574738 R 124,5 M 18 S (PR-2B) Mini 28 574740 R 124,5 M 22 S (PR-2B) Mini 28 574742 R 124,5	IPC-RAC	M 18		578314	146,98
M 35 578390 178.1 M 15 S (PR-2B) Mini 28 574738 R 124.5 M 18 S (PR-2B) Mini 28 574740 R 124.5 M 22 S (PR-2B) Mini 28 574742 R 124.5	Carbon Steel				146,98
M 15 S (PR-2B) Mini Z8 574738 R 124,5 M 18 S (PR-2B) Mini Z8 574740 R 124,5 M 22 S (PR-2B) Mini Z8 574742 R 124,5					146,98
M 18 S (PR-2B) Mini Z8 574740 R 124,5 M 22 S (PR-2B) Mini Z8 574742 R 124,5			Mini 78		
M 22 S (PR-2B) Mini Z8 574742 R 124,5					124,51
M 00 0 (DD 0D)		M 22 S (PR-2B)	Mini Z8	574742 R	124,51
		M 28 S (PR-2B)	Mini Z8	574744 R	124,51 136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
ASSOTHERM IPI-RAX	M 15 M 18		578312 578314	146,98 146,98
Inox	M 22		578316	146,98
	M 28		578318	146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
ASSOTHERM IPI-RAX	M 15 M 18		578312 578314	146,98 146,98
Inox Gas	M 22		578316	146,98
	M 28		578318	146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
ASSOTHERM IPM-Multistrato	H 16 H 20		578400 578406	159,75 159,75
II PI PIGLIOTI GLO	H 26		578410	159,75
	H 32 TH 16		578412	159,75
	TH 20		578352 R 578358 R	177,08 177,08
	TH 26		578362 R	177,08
	TH 32 THL 32		578364 578368	177,08 177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16 U 20		578374 578378	165,66 165,66
	U 26 ⁷⁾		578392	194,31
ASSOTHERM	U 32 M 15		578382 578312	194,31 146,98
IPR-RRA	M 18		578314	146,98
Copper	M 22		578316	146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
ACCOTUEDM	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
ASSOTHERM IPR-RRA	M 15 M 18		578312 578314	146,98 146,98
Copper Gas	M 22		578316	146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
AOTH 5 4005	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
ASTM F 1807 (Fittings with	US 3/8" US 1/2"		578534 578536	201,16 201,16
Copper Crimp Ring	US 3/4"		578538	201,16
for PEX tubing) ATUSA ITALIA	US 1" M 15		578540 578312	201,16 146,98
INSTALPRESS	M 18		578314	146,98
CARBON STEEL PRESS FITTINGS	M 22 M 28		578316 578318	146,98 146,98
TRESSTITINGS	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
ATUSA ITALIA	M 35 S (PR-2B) M 15	Mini Z8	574746 R 578312	136,96 146,98
INSTALPRESS	M 18		578314	146,98
STAINLESS STEEL PRESS FITTINGS	M 22 M 28		578316 578318	146,98 146,98
rkess fillings	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
AUSTEC	M 35 S (PR-2B) TH 16	Mini Z8	574746 R 578352 R	136,96 177,08
PEX-B, PEX-AL-PEX	TH 20		578358 R	177,08
(AUS)	TH 25		578360 578366	177,08
	TH 32 U 16		578364 578374	177,08 165,66
	U 20		578378	165,66
	U 25 U 32		578380 578382	165,66 194,31
AUSTEC	TH 16		578352 R	177,08
PEX-AL-PEX GAS (AUS)	TH 20		578358 R 578360	177,08
(MUJ)	TH 25 TH 32		578360 578364	177,08 177,08
	U 16		578374	165,66
	U 20		578378	165,66
	U 25		578380	165,66

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
AYOR	H 12		578396	159,75	Bampi BALPEX	TH 16		578352 R	177,08
FIXOCONNECT Press	H 16 H 20		578400 578406	159,75 159,75	Gas	TH 20 TH 26		578358 R 578362 R	177,08 177,08
11000	H 25		578408	159,75		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	RFz 12		578490	184,45		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	RFz 16		578492	184,45		TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	RFz 20 RFz 25		578494 578496	184,45	BARBI EASYPRESS	H 12		578396	159,75
	U 16		578374	184,45 165,66	(Industrial Blansol)	H 16 H 20		578400 578406	159,75 159,75
	U 20		578378	165,66		H 25		578408	159,75
	U 25		578380	165,66		H 32		578412	159,75
AYOR	H 16		578400	159,75		RFz 12		578490	184,45
FIXOMULTIX	H 20 H 26		578406 578410	159,75 159,75		RFz 16		578492	184,45
	H 32		578412	159,75		RFz 20 RFz 25		578494 578496	184,45 184,45
	TH 16		578352 R	177,08		RFz 32		578498	184,45
	TH 20		578358 R	177,08		U 16		578374	165,66
	TH 26		578362 R	177,08		U 20		578378	165,66
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51		U 25		578380	165,66
	TH 20 S (PR-2B)**	Mini Z8	574782 R	124,51	BARBI MULTIPEX	U 32 H 14		578382 578398	194,31 159,75
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51	(Industrial Blansol)	H 16		578400	159,75
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96	,	H 18		578404	159,75
	U 16		578374	165,66		H 20		578406	159,75
	U 20 U 32		578378 578382	165,66 194,31		H 25		578408	159,75
	U 40		578386	236,66		H 26		578410 578412	159,75 159,75
AYOR	H 16		578400	159,75		H 32 RFz 16		578492	184,45
SOMATHERM	H 20		578406	159,75		RFz 18		578638	184,45
FOR YOU -1	H 26 TH 16		578410 578352 R	159,75 177,08		RFz 20		578494	184,45
	TH 20		578358 R	177,08		RFz 25		578496	184,45
	TH 26		578362 R	177,08		RFz 32 TH 16		578498 578352 R	184,45 177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51		TH 20		578358 R	177,08
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		TH 26		578362 R	177,08
	TH 26 S (PR-2B)** U 16	Mini Z8	574794 R 578374	124,51 165,66		TH 32		578364	177,08
	U 20		578378	165,66		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
AYOR	H 12		578396	159,75		TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
SOMATHERM	H 16		578400	159,75		TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
FOR YOU -2	H 20 H 25		578406 578408	159,75 159,75		U 16		578374	165,66
	RFz 12		578490	184,45		U 18		578376	165,66
	RFz 16		578492	184,45		U 20		578378	165,66
	RFz 20		578494	184,45		U 25 U 32		578380 578382	165,66 194,31
	RFz 25		578496	184,45		U 40		578386	236,66
	U 16 U 20		578374 578378	165,66 165,66	BEGETUBE/	B 14		578466	193,28
	U 25		578380	165,66	IVAR	B 16		578468	193,28
		_				B 18		578470	193,28
		В				B 20 B 26		578472 578474	193,28 213,00
Bampi BALPEX	TH 16		578352 R	177,08		B 32		578476	213,00
serie LP	TH 18		578356	177,08	Béné inox	M 15		578312	146,98
	TH 20		578358 R	177,08	Série 41	M 18		578314	146,98
	TH 26		578362 R	177,08		M 22 M 28		578316 578318	146,98 146,98
	TH 32		578364	177,08		M 35		578390	178,12
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51		M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51		M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
	TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66	Brass Form	H 16	MIIII ZU	578400	159,75
	U 18		578376	165,66	Master-Al-Pex	H 18		578404	159,75
	U 20		578378	165,66		H 20		578406	159,75
	U 26 ⁷⁾		578392	194,31		TH 16		578352 R	177,08
D: D41 DEV	U 32		578382	194,31		TH 18 TH 20		578356 578358 R	177,08 177,08
Bampi BALPEX serie MP	TH 16 TH 18		578352 R 578356	177,08 177,08		TH 26		578362 R	177,08
36116 1911	TH 20		578358 R	177,08		TH 32		578364	177,08
	TH 26		578362 R	177,08		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 32		578364	177,08		TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 40	M:-: 70	578624	234,69		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574786 R	124,51 124,51		TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,51 136,96
	TH 18 S (PR-2B)**	Mini Z8	574786 R 574788 R	124,51		U 16	MIIII 40	578374	165,66
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		U 18		578376	165,66
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96		U 20		578378	165,66

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Brass & Fittings PRESSMAN	RFz 16 RFz 18		578492 578638	184,45 184,45
MultiPress	ACz 20		578612	184,45
	RFz 25		578496	184,45
	RFz 32		578498	184,45
•	RFz 16		578492	184,45
PRESSMAN REUPTESS	ACz 20		578638 578612	184,45 184,45
	RFz 25		578496	184,45
	RFz 32		578498	184,45
	B 16		578468	193,28
			578472 578474	193,28 213.00
ывазрісэз	B 32		578476	213,00
	F 16		578456	168,68
	F 20		578460	168,68
	F 26 F 16 S (PR-2B)**	Mini Z8	578462 574728 R	182,48 124,51
	F 20 S (PR-2B)**	Mini Z8	574726 R 574730 R	124,51
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,51
	H 16		578400	159,75
	H 18		578404	159,75
			578406	159,75 159,75
	н 26 ТН 16		578410 578352 R	177,08
	TH 18		578356	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
			578374	165,66
			578376 578378	165,66 165,66
	U 26 ⁷⁾		578392	194,31
	U 32		578382	194,31
	VUS ½" (OD 15,9 mm)	С	578566	177,50
Press			578568 578570	177,50 177,50
			578606	177,50
CGR	H 16		578400	159,75
	H 20		578406	159,75
multicouche			578410	159,75
			578412 578352 R	159,75 177,08
	TH 20		578358 R	177,00
	TH 26		578362 R	177,08
	TH 32		578364	177,08
			578624	234,69
			574782 R	124,51 124,51
			574788 R 574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16		578374	165,66
	U 20		578378	165,66
			578392	194,31
U 18 U 20 U 26 ⁷¹ U 32 C C Cello Products VUS ½** (0D 15,9 mm) FB-Press VUS ¾** (0D 22,2 mm) VUS 1** (0D 28,6 mm) VUS 1** (0D 34,9 mm) FB-Press VUS 1½** (0D 34,9 mm) FB-Press VUS 1½** (0D 34,9 mm) FB-Press FB-Press VUS 1½** (0D 34,9 mm) FB-Press FB-Press VUS 1½** (0D 34,9 mm) FB-Press FB-Press VUS 1½** (0D 34,9 mm) FB-Press FB-Press VUS 1½** (0D 28,6 mm) FB-Press FB-Press VUS 1½** (0D 28,6 mm) FB-Press FB-Press VUS 1½** (0D 28,6 mm) FB-Press FB-Press VUS 1½** (0D 28,6 mm) FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press FB-Press	578382 578386	194,31 236,66		
CGR			578396	159,75
PRESSMAN RetiPress RFz ACz RFz RFz RFz RFz RFz RFz RFz RFz RFz RF			578400	159,75
PER			578406	159,75
			578408	159,75
	KFZ 12		578490 578492	184,45 184,45
	DE- 14		578494	184,45
	RFz 16 RFz 20			
	RFz 16 RFz 20 RFz 25		578496	184,45
CHIALI	RFz 20		578496 578352 R	
	RFz 20 RFz 25 TH 16 TH 20		578352 R 578358 R	184,45 177,08 177,08
	RFz 20 RFz 25 TH 16 TH 20 TH 26		578352 R 578358 R 578362 R	184,45 177,08 177,08 177,08
	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32		578352 R 578358 R 578362 R 578364	184,45 177,08 177,08 177,08 177,08
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26		578352 R 578358 R 578362 R	184,45 177,08 177,08 177,08
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 32 TH 40		578352 R 578358 R 578362 R 578364 578624	184,45 177,08 177,08 177,08 177,08 234,69
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16		578352 R 578358 R 578362 R 578364 578624 578400 578406 578374	184,45 177,08 177,08 177,08 177,08 234,69 159,75 159,75
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16		578352 R 578358 R 578362 R 578364 578664 578624 578400 578406 578374 578378	184,45 177,08 177,08 177,08 177,08 234,69 159,75 159,75 165,66
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16 U 20 TH 14		578352 R 578358 R 578362 R 578364 578624 578400 578406 578374 578378 578348	184,45 177,08 177,08 177,08 177,08 234,69 159,75 159,75 165,66 165,66
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 32 TH 40 H 16 H 20 U 16 U 20 TH 14 TH 16		578352 R 578358 R 578362 R 578364 578424 578400 578406 578374 578378 578348 578352 R	184,45 177,08 177,08 177,08 177,08 234,69 159,75 159,75 165,66 165,66 177,08
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16 U 20 TH 14		578352 R 578358 R 578362 R 578364 578624 578400 578406 578374 578378 578348	184,45 177,08 177,08 177,08 234,69 159,75 159,75 165,66 165,66 177,08 177,08
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16 U 20 TH 14 TH 14		578352 R 578358 R 578362 R 578364 578624 578400 578406 578374 578378 578348 578352 R 578356	184,45 177,08 177,08 177,08 177,08 234,69 159,75 159,75 165,66 165,66 177,08
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16 U 20 TH 14 TH 16 TH 18		578352 R 578358 R 578362 R 578364 578624 578400 578406 578378 578378 578378 578352 R 578356 578358 R 578362 R 578364	184.45 177.08 177.08 177.08 177.08 234.69 159.75 165.66 165.66 177.08 177.08 177.08 177.08
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16 U 20 TH 14 TH 16 TH 18 TH 20 TH 26 TH 26 TH 32 TH 26 TH 32 TH 32 TH 32 TH 16 S (PR-2B)**	Mini Z8	578352 R 578358 R 578362 R 578364 578400 578406 578374 578378 578378 578352 R 578356 578358 R 578364 578364 578364	184.45 177.08 177.08 177.08 177.08 234.69 159.75 159.75 165.66 177.08 177.08 177.08 177.08 177.08
CHIALIPEX	RFz 20 RFz 25 TH 16 TH 20 TH 26 TH 32 TH 40 H 16 H 20 U 16 U 20 TH 14 TH 16 TH 18	Mini 28 Mini 28 Mini 28	578352 R 578358 R 578362 R 578364 578624 578400 578406 578378 578378 578378 578352 R 578356 578358 R 578362 R 578364	184.45 177.08 177.08 177.08 177.08 234.69 159.75 165.66 165.66 177.08 177.08 177.08 177.08

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Climatrix Variotherm	TH 11,6 TH 16		578344 578352 R	177,08 177,08
System TH	TH 16 S (PR-2B)**	Mini Z8	574782 R	177,00
ClouSet	TH 16		578352 R	177,08
	TH 18		578356	177,08
	TH 20 TH 16 S (PR-2B)**	Mini Z8	578358 R 574782 R	177,08 124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
Comap	RFz 12		578490	184,45
PEX Press	RFz 16 RFz 20		578492 578494	184,45 184,45
	RFz 25		578496	184,45
Comap	TH 14		578348	177,08
Multiskin	TH 16 TH 18		578352 R 578356	177,08
	TH 20		578358 R	177,08 177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	THL 32 TH 40		578368 578624	177,08 234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B) U 14	Mini Z8	574798 R 578372	136,96 174,38
	U 16		578374	165,66
	U 18		578376	165,66
	U 20 U 32		578378 578382	165,66
	U 32 H 14		578398	194,31 159,75
	H 16		578400	159,75
	H 18		578404	159,75
	H 20 H 26		578406 578410	159,75 159,75
	H 32		578412	159,75
Comap	TH 16		578352 R	177,08
Multiskin Gas	TH 20		578358 R	177,08
	TH 26 TH 32		578362 R 578364	177,08 177,08
	THL 32		578368	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,51 136,96
	U 16	711111 20	578374	165,66
	U 20		578378	165,66
	U 32 H 16		578382 578400	194,31 159,75
	H 20		578406	159,75
	H 26		578410	159,75
COMICA	H 32		578412	159,75
COMISA Press System	TH 14 TH 16		578348 578352 R	177,08 177,08
	TH 18		578356	177,08
	TH 20		578358 R	177,08
	TH 25 TH 26		578360 578362 R	177,08 177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574786 R	124,51 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B) H 14	Mini Z8	574798 R 578398	136,96 159,75
	H 16		578400	159,75
	H 18		578404	159,75
	H 20		578406	159,75
	H 26 H 32		578410 578412	159,75 159,75
	B 14		578466	193,28
	B 16		578468	193,28
	B 18		578470 578472	193,28
	B 20 B 26		578472 578474	193,28 213,00
	B 32		578476	213,00
COMISA	TH 16		578352 R	177,08
Press System Gas	TH 20		578358 R	177,08
	TH 26 TH 32		578362 R 578364	177,08 177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs pressing rings
CONEL	M 15		578312	146,98	Conex Bänninger	F 16
CONNECT INOX	M 18		578314	146,98	>B< Flex	F 18
	M 22		578316	146,98		F 20 F 32
	V 15 V 18		578328 578332	146,98 146,98		F 16 S (PR-2B)*
	V 22		578334	146,78		F 20 S (PR-2B)*
CONEL	F 16		578456	168,68		F 32 S (PR-2B)
CONNECT	F 20		578460	168,68		H 16
MULTI	F 26		578462	182,48		H 18
	F 32		578464	182,48		H 20
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,51		H 25
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,51		H 32
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,51		RFz 16
	F 32 S (PR-2B)**	Mini Z8	574734 R	136,96		RFz 18
	H 16		578400	159,75		RFz 20
	H 20		578406	159,75		RFz 25 RFz 32
	H 26		578410	159,75		TH 16
	H 32		578412	159,75		TH 18
	TH 16		578352 R	177,08		TH 20
	TH 20		578358 R	177,08		TH 25
	TH 26 TH 32		578362 R 578364	177,08 177,08		TH 32
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51		TH 16 S (PR-2B)
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		TH 18 S (PR-2B)
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		TH 20 S (PR-2B)
	TH 32 S (PR-2B)**	Mini Z8	574798 R	136,96		TH 32 S (PR-2B)
	U 16		578374	165,66		U 16
	U 20		578378	165,66		U 18
(DN 26)	U 25		578380	165,66		U 20
	U 32		578382	194,31		U 25
	VP 16		578482	176,56	C D"	U 32
	VP 20		578484	176,56	Conex Bänninger >B< Flex Gas	F 16 F 18
	VP 32		578488	195,25	>D< Flex 045	F 20
CONEL	F 16		578456	168,68		F 32
CONNECT	F 20		578460	168,68		F 16 S (PR-2B)*
MV2	F 26		578462	182,48		F 20 S (PR-2B)*
	F 32	M:-: 70	578464	182,48		F 32 S (PR-2B)
	F 16 S (PR-2B)**	Mini Z8 Mini Z8	574728 R	124,51		H 16
	F 20 S (PR-2B)** F 26 S (PR-2B)**	Mini Z8	574730 R 574732 R	124,51 124,51		H 18
	F 32 S (PR-2B)**	Mini Z8	574734 R	136,96		H 20
	TH 16	riiii 20	578352 R	177,08		H 25
	TH 20		578358 R	177,08		H 32
	TH 26		578362 R	177,08		RFz 16
	TH 32		578364	177,08		RFz 18 RFz 20
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51		RFz 25
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		RFz 32
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		TH 16
	TH 32 S (PR-2B)**	Mini Z8	574798 R	136,96		TH 18
Conex Bänninger	M 15		578312	146,98		TH 20
<a> Press Inox	M 18		578314	146,98		TH 25
(304)	M 22		578316	146,98		TH 32
	M 28		578318	146,98		TH 16 S (PR-2B)
	M 35		578390	178,12		TH 18 S (PR-2B)
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		TH 20 S (PR-2B)
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		TH 32 S (PR-2B)
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		U 16
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8	574744 R	124,51		U 18
Coney Ränninger	M 35 S (PR-2B)	Mini Z8	574746 R 578312	136,96		U 20
Conex Bänninger <a> Press Inox	M 15 M 18		578312 578314	146,98 146,98		U 25
(316L)	M 22		578314	146,98	Capay Bänninga-	U 32
(0.101)	M 28		578318	146,78	Conex Bänninger >B< MaxiPro	BMP 1/4" BMP 3/8"
	M 35		578390	178,12	ישר אומגורוט רטר	BMP 1/2"
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		BMP 5/8"
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		BMP 3/4"
				-,		2 /*
		Mini Z8	574742 R	124.51		BMP %"
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51		BMP %" BMP 1"

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	
Conex Bänninger	F 16		578456	168,
>B< Flex	F 18		578458	168,
	F 20		578460	168,6
	F 32		578464	182,4
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,
	F 32 S (PR-2B)	Mini Z8	574734 R	136,9
	H 16		578400	159,7
	H 18 H 20		578404 578406	159,7
	H 25		578408	159,7 159,7
	H 32		578412	159,
	RFz 16		578492	184,
	RFz 18		578638	184,
	RFz 20		578494	184,
	RFz 25		578496	184,
	RFz 32		578498	184,
	TH 16		578352 R	177,
	TH 18		578356	177,
	TH 20		578358 R	177,
	TH 25		578360	177,
	TH 32		578364	177,
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,
	U 16		578374	165,
	U 18		578376	165,
	U 20		578378	165,
	U 25		578380	165,
	U 32		578382	194,
Conex Bänninger	F 16		578456	168,
>B< Flex Gas	F 18		578458	168,
	F 20		578460	168,
	F 32		578464	182,
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,
	F 32 S (PR-2B)	Mini Z8	574734 R	136,
	H 16		578400	159,
	H 18		578404	159,
	H 20		578406	159,
	H 25		578408	159,
	H 32		578412	159,
	RFz 16		578492	184,
	RFz 18		578638	184,
	RFz 20		578494	184,
	RFz 25		578496	184,
	RFz 32		578498	184,
	TH 16		578352 R	177,
	TH 18		578356	177,
	TH 20		578358 R	177,
	TH 25		578360	177,
	TH 32	Mini Z8	578364	177,
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**		574782 R	124,
	TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574786 R 574788 R	124, 124,
	TH 32 S (PR-2B)	Mini Z8	574788 R	136,
	U 16	MIIII ZU	578374	165,
	U 18		578376	165,
	U 20		578378	165,
	U 25		578380	165,
	U 32		578382	194,
Conex Bänninger	BMP 1/4"		578700	174,
Lonex banninger >B< MaxiPro	BMP 3/8"		578702	175,
- FIGALITY	BMP 1/2"		578704	175,
	BMP 5/8"		578706	175,
	BMP 3/4"		578708	175,
	BMP %"		578710	175,
			0.0/10	170,
	BMP 1"		578712	175,

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- 7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	€
Conex Bänninger	V 12		578324	146,98
·B< Press	V 14 V 15		578326 578328	146,98 146,98
	V 16		578330	146,98
	V 18		578332	146,98
	V 22		578334	146,98
	V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51
	V 14 S (PR-2B)	Mini Z8	574800 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 16 S (PR-2B)	Mini Z8	574802 R	124,51
	V 18 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8	574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
	M 15		578312	146,98
	M 22		578316	146,98
	M 28		578318	146,98
Conex Bänninger ·B< Press Carbon	V 15 V 18		578328 578332	146,98 146,98
D - 1 1 COS CUI DOII	V 22		578334	146,98
	V 28		578336	146,98
	V 35		578604	178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
Conex Bänninger	V 12		578324	146,98
·B< Press Gas	V 14		578326	146,98
	V 15 V 16		578328 578330	146,98
	V 16 V 18		578330 578332	146,98 146,98
	V 22		578334	146,98
	V 28		578336	146,98
	V 35		578604	178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 14 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini Z8	574800 R 574752 R	124,51 124,51
	V 16 S (PR-2B)	Mini Z8	574802 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
Conex Bänninger	V 35 S (PR-2B) V 15	Mini Z8	574762 R 578328	136,96
·B< Press Inox	V 18		578332	146,78
	V 22		578334	146,98
	V 28		578336	146,98
	V 35		578604	178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
Conex Bänninger	V 12		578324	146,98
·B< Press Solar	V 14		578326	146,98
	V 15 V 16		578328 578330	146,98 146,98
	V 18		578332	146,98
	V 22		578334	146,98
	V 28		578336	146,98
	V 35	M:-: 70	578604	178,12
	V 12 S (PR-2B) V 14 S (PR-2B)	Mini Z8 Mini Z8	574748 R 574800 R	124,51 124,51
	V 14 S (PR-2B) V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 16 S (PR-2B)	Mini Z8	574802 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
		D		
Debrunner Acifer	M 12		578310	146,98
-a Presssystem	M 15		578312	146,9
-Stahl	M 18		578314	146,91
	M 22		578316	146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 12 S (PR-2B)	Mini Z8	574736 R	124,51
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
UOPIPE SYSTEMS	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
DUOPIPE SYSTEMS	U 16 U 18		578374 578376	165,66 165,66
. COLIE PINOTOTEM	U 20		578378	165,66
	U 25		578380	165,66
	U 32		578382	194,31
W Verbundrohr	U 16		578374	165,66
nultitubo systems	U 18		578376	165,66
	U 20		578378 578380	165,66 165,66
	U 25			

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
		E		
EBRILLE	U 16		578374	165,66
Isomonflex	U 20 U 25		578378 578380	165,66 165,66
	U 32		578382	194,31
	H 26		578410	159,75
	TH 26 TH 26 S (PR-2B)**	Mini Z8	578362 R 574794 R	177,08 124,51
EBRILLE	U 16	PHIN 20	578374	165,66
Monflex	U 20		578378	165,66
	U 25 U 32		578380 578382	165,66 194,31
	H 26		578410	159,75
	TH 26		578362 R	177,08
EFFEBI	TH 26 S (PR-2B)** M 15	Mini Z8	574794 R 578312	124,51 146,98
EFFEBI-PRESS	M 18		578314	146,98
Aisi316	M 22		578316	146,98
System M Profile ¹⁾	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
EFFEBI	V 12		578324	146,98
EFFEBI-PRESS Aisi316	V 15 V 18		578328 578332	146,98 146,98
System V Profile	V 22		578334	146,98
	V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
EFFEBI	M 12		578310	146,98
EFFEBI-PRESS Carbon-S	M 15 M 18		578312 578314	146,98 146,98
System M Profile ¹⁾	M 22		578316	146,98
	M 28		578318	146,98
	M 35 M 12 S (PR-2B)	Mini 78	578390 574736 R	178,12 124,51
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
EFFEBI	V 12		578324	146,98
EFFEBI-PRESS Carbon-S	V 15 V 18		578328 578332	146,98 146,98
System V Profile	V 22		578334	146,98
	V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8	574756 R	124,51
	V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
EFFEBI DDECC	V 12		578324	146,98
EFFEBI-PRESS COPPER	V 14 V 15		578326 578328	146,98 146,98
	V 16		578330	146,98
	V 18		578332	146,98
	V 22 V 28		578334 578336	146,98 146,98
	V 35		578604	178,12
	V 12 S (PR-2B) V 14 S (PR-2B)	Mini Z8	574748 R	124,51
	V 15 S (PR-2B)	Mini Z8 Mini Z8	574800 R 574752 R	124,51 124,51
	V 16 S (PR-2B)	Mini Z8	574802 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
EFFEBI-PRESS	V 12 V 15		578324 578328	146,98 146,98
NICO FLLERI-LKE22	V 18		578328	146,98
	V 22		578334	146,98
	V 28 V 35		578336 578606	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs I pressing rings
EFFEBI	V 12		578324	146,98	EFFEBI	TH 16
EFFEBI-PRESS	V 15		578328	146,98	TOF	TH 18
UNICO	V 18		578332	146,98	MULTIPINZA	TH 20
(GAS)	V 22		578334	146,98		TH 25 TH 26
	V 28		578336	146,98		TH 32
	V 35		578604	178,12		TH 40
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51		TH 16 S (PR-2B)**
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51		TH 18 S (PR-2B)**
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51		TH 20 S (PR-2B)**
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51		TH 25 S (PR-2B)**
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51		TH 26 S (PR-2B)**
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96		TH 32 S (PR-2B)
EFFEBI	M 15		578312	146,98		F 16
PRESSTIGE	M 18		578314	146,98		F 18
	M 22		578316	146,98		F 20
	M 28		578318	146,98		F 26
	M 35		578390	178,12		F 32
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		Fz 40 F 16 S (PR-2B)**
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		F 20 S (PR-2B)**
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		F 26 S (PR-2B)**
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51		F 32 S (PR-2B)
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96		H 16
	V 15		578328	146,98		H 18
	V 18		578332	146,98		H 20
	V 22		578334	146,98		H 25
	V 28		578336	146,98		H 26
	V 35		578604	178,12		H 32
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51		U 16
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51		U 18
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51		U 20
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51		U 25
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96		U 26 ⁷⁾
EFFEBI	M 15		578312	146,98		U 32
PRESSTIGE 4E05	M 18		578314	146,98		U 40 B 16
	M 22		578316	146,98		B 18
	M 28		578318	146,98		B 20
	M 35	14: : 70	578390	178,12		B 26
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		B 32
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51	EFIELD	U 16
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51	MULTILAYER PRESS	U 18
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51	DINGAS	U 20
FFFFF	M 35 S (PR-2B)	Mini Z8	574746 R	136,96		U 25
FFEBI	M 15		578312	146,98		U 32
PRESSTIGE-GAS	M 18		578314	146,98	EFIELD	U 16
	M 22		578316	146,98	MULTILAYER PRESS	U 18
	M 28		578318	146,98	WATER	U 20
	M 35	Mini Z8	578390	178,12		U 25 U 32
	M 15 S (PR-2B)		574738 R	124,51	Elkhart	VUS ½" (OD 15,9 r
	M 18 S (PR-2B)	Mini Z8 Mini Z8	574740 R	124,51 124,51	APOLLOXPRESS	VUS ¾" (OD 22,21
	M 22 S (PR-2B)	Mini Z8	574742 R 574744 R		Fittings Copper	VUS 1" (OD 28,6 m
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8	574744 R 574746 R	124,51	and Low-Lead Brass	VUS 1¼" (OD 34,9
	V 15	MIIII ZO	578328	136,96 146,98	EMMETI	B 16
	V 18		578332		GERPEX-	B 20
			578334	146,98 146,98	FIVPRESS	B 26
	V 22 V 28		578336	146,78		B 32
	V 35		578604	178,12		F 16
		Mini 70				F 20
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51		H 16
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51		H 20
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51		TH 16
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51		TH 20
FFFFF	V 35 S (PR-2B)	Mini Z8	574762 R	136,96		TH 26
EFFEBI	TH 16		578352 R	177,08		TH 32 TH 40
TOF-GAS	TH 20		578358 R	177,08		U 16
MULTIPINZA	TH 26		578362 R	177,08		U 20
	TH 32	M:=: 70	578364	177,08	EMPUR	TH 14
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51	LITI UN	TH 15
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		TH 16
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		TH 17
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96		TH 20
	H 16		578400	159,75		TH 25
	H 20		578406	159,75		TH 14 S (PR-2B)**
	H 26		578410	159,75		TH 15 S (PR-2B)**
	H 32		578412	159,75		TH 16 S (PR-2B)**
	U 16		578374	165,66		TH 17 S (PR-2B)**
	11.00		E70270	165,66		
	U 20 U 32		578378 578382	194,31		TH 20 S (PR-2B)**

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
EFFEBI	TH 16		578352 R	177,08
TOF Multipinza	TH 18 TH 20		578356 578358 R	177,08 177,08
	TH 25		578360	177,08
	TH 26 TH 32		578362 R 578364	177,08
	TH 40		578624	177,08 234.69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B) F 16	Mini Z8	574798 R 578456	136,96 168,68
	F 18		578458	168,68
	F 20		578460	168,68
	F 26 F 32		578462 578464	182,48 182,48
	F 32 Fz 40		578478	247,15
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,51
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,51
	F 26 S (PR-2B)** F 32 S (PR-2B)	Mini Z8 Mini Z8	574732 R 574734 R	124,51 136,96
	H 16	==	578400	159,75
	H 18		578404	159,75
	H 20 H 25		578406 578408	159,75 159,75
	H 26		578410	159,75
	H 32		578412	159,75
	U 16 U 18		578374 578376	165,66 165,66
	U 20		578378	165,66
	U 25		578380	165,66
	U 26 ⁷⁾		578392	194,31
	U 32 U 40		578382 578386	194,31 236,66
	B 16		578468	193,28
	B 18		578470	193,28
	B 20 B 26		578472 578474	193,28 213,00
	B 32		578476	213,00
EFIELD	U 16		578374	165,66
MULTILAYER PRESS DINGAS	U 18 U 20		578376 578378	165,66 165,66
	U 25		578380	165,66
	U 32		578382	194,31
EFIELD Multilayer press	U 16 U 18		578374 578376	165,66 165,66
WATER	U 20		578378	165,66
	U 25		578380	165,66
Elkhart	U 32 VUS ½" (OD 15,9 mm)		578382 578566	194,31 177,50
APOLLOXPRESS	VUS ¾" (OD 22,2 mm)		578568	177,50
Fittings Copper	VUS 1" (OD 28,6 mm)		578570	177,50
and Low-Lead Brass EMMETI	VUS 1¼" (OD 34,9 mm) B 16		578606 578468	177,50 193,28
GERPEX-	B 20		578472	193,28
FIVPRESS	B 26		578474	213,00
	B 32 F 16		578476 578456	213,00 168,68
	F 20		578460	168,68
	H 16		578400	159,75
	H 20 TH 16		578406	159,75
	TH 20		578352 R 578358 R	177,08 177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40 U 16		578624 578374	234,69 165,66
	U 20		578378	165,66
EMPUR	TH 14		578348	177,08
	TH 15 TH 16		578350 578352 R	177,08 177,08
	TH 17		578354	177,08
	TH 20		578358 R	177,08
	TH 25	Mini 70	578360	177,08
	TH 14 S (PR-2B)** TH 15 S (PR-2B)**	Mini Z8 Mini Z8	574778 R 574780 R	124,51 124,51
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 17 S (PR-2B)**	Mini Z8	574784 R	124,51
	TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574788 R	124,51
	TH 25 S (PR-2B)**	MIIII ZO	574792 R	124,51

161

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	•
sta Rohr	M 15		578312	146,9
simplesta SH M	M 18 M 22		578314 578316	146,9
	M 28		578318	146,9 146,9
	M 35		578390	178,1
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
sta Rohr	M 35 S (PR-2B) M 15	Mini Z8	574746 R 578312	136,9 146.9
implesta ST M	M 18		578314	146,7
	M 22		578316	146,9
	M 28		578318	146,9
	M 35		578390	178,1
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5 124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
UROTUBI	M 12		578310	146,9
UROPA	M 15		578312	146,9
-Steel Pressfitting	M 18		578314	146,9
ystem M-Profile ¹⁾	M 22		578316	146,9
	M 28		578318	146,9
	M 35 M 12 S (PR-2B)	Mini Z8	578390 574736 R	178,1 124,5
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
UROTUBI	M 15		578312	146,9
UROPA	M 18		578314	146,9
ox Pressfitting ystem M-Profile ¹⁾	M 22 M 28		578316 578318	146,9 146,9
ystelli m-riulite	M 35		578390	178,1
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
vans omponents	VAU 15 (½") (OD 12,7 mm) VAU 20 (¾") (OD 19,1 mm)		578630 578632	151,8 151,8
resslok	VAU 25 (1") (OD 25,4 mm)		578634	151,8
		F		
FAR Rubinetterie PRESSFAR	TH 14 TH 16		578348 578352 R	177,0 177,0
NESSI AN	TH 17		578354	177.0
	TH 18		578356	177,0
	TH 20		578358 R	177,0
	TH 25		578360	177,0
	TH 26		578362 R	177,0
	TH 32		578364	177,0
	TH 40		578624	234,6
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,5
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 17 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574784 R 574786 R	124,5 124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,9
	H 14		578398	159,7
	H 16		578400	159,7
	H 18		578404 578404	159,7
	H 20 H 26		578406 578410	159,7 159,7
	H 32		578412	159,7
	U 14		578372	174,3
	U 16		578374	165,6
	U 18		578376	165,6
	U 20		578378	165,6
	U 25		578380	165,6
	U 32 U 40		578382 578386	194,3
B.Q. BARONIO	V 12		578386 578324	236,6 146,9
1 PRESS SOLAR	V 12 V 14		578326	146,7
	V 15		578328	146,9
	V 16		578330	146,9
	V 18		578332	146,9
	V 22		578334	146,9
	V 28		578336	146,9
	V 35	M: : 70	578604	178,1
	V 12 S (PR-2B)	Mini Z8	574748 R	124,5
	V 14 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini 78	574800 R 574752 R	124,5 124,5
	V 16 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574802 R	124,5 124,5
	V 18 S (PR-2B)	Mini Z8	574756 R	124,5
				, 0
	V 22 S (PR-2B)	Mini Z8	574758 R	124,5
		Mini Z8 Mini Z8	574758 R 574760 R	124,5 124,5

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
F.B.Q. BARONIO BQ PRESS WATER	V 12 V 14		578324 578326	146,98 146,98
DAT REGO WATER	V 15		578328	146,98
	V 16		578330	146,98
	V 18		578332	146,98
	V 22 V 28		578334 578336	146,98 146,98
	V 35		578604	178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 14 S (PR-2B)	Mini Z8	574800 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 16 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574802 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
F.B.Q. BARONIO BQ PRESS GAS	V 12 V 14		578324 578326	146,98 146,98
JQ F KLJJ UAJ	V 15		578328	146,78
	V 16		578330	146,98
	V 18		578332	146,98
	V 22 V 28		578334	146,98
	V 35		578336 578604	146,98 178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 14 S (PR-2B)	Mini Z8	574800 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 16 S (PR-2B)	Mini Z8	574802 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
ERCOFLOOR	RFz 16		578492	184,45
DUO Press	RFz 20 RFz 25		578494	184,45
ERCO PEX	RFz 25 RFz 32		578496 578498	184,45 184,45
	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 25		578360	177,08
	TH 32		578364	177,08
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
FERCOFLOOR DUO Press	RFz 16 RFz 20		578492 578494	184,45 184,45
MULTIFER	RFz 25		578496	184,45
	RFz 32		578498	184,45
	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 25 TH 32		578360 578364	177,08 177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
	TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66
	U 18		578376	165,66
	U 20		578378	165,66
	U 25		578380	165,66
	U 32		578382	194,31
ERRO systems	U 40 TH 16		578386 578352 R	236,66 177,08
BRASELI	TH 20		578358 R	177,08
GPF GAS	TH 25		578360	177,08
	TH 32		578364	177,08
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini 28 Mini 28	574788 R 574792 R	124,51 124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
ERRO systems	U 16		578374	165,66
BRASELI	U 18		578376	165,66
GPF MULT	U 20		578378	165,66
Pressfitting MULTICAPA	U 25 U 32		578380 578382	165,66 194,31
	U 40		578386	236,66
ERRO systems	U 16		578374	165,66
BRASELI	U 18		578376	165,66
GPF PPSU	U 20		578378 578380	165,66
Pressfitting PEX y MULTICAPA	U 25 U 32		578380 578382	165,66 194,31
	U 40		578386	236,66
ERRO systems	RFz 16		578492	184,45
BRASELI	RFz 20		578494	184,45
OPF PRESS	RFz 25		578496	184,45
Pressfitting PEX FILINOX	RFz 32 M 15		578498 578312	184,45 146,98
nstalpress Steel	м 13 М 18		578314	146,98
. ,	M 22		578316	146,98
	M 28		578318	146,98
	M 35	M. 120	578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	. 1 44 0 (1 11 4 0)	riiii 20	0/4/42 N	
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
FILINOX	M 15		578312	146,98
Instalpress Inox	M 18 M 22		578314 578316	146,98 146,98
	M 28		578318	146,78
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
FITTINGS ESTÁNDAR	RFz 16	MIIII ZU	578492	184,45
ECO-PRESS	RFz 20		578494	184,45
	RFz 25		578496	184,45
	RFz 32		578498	184,45
FITTINGS ESTÁNDAR	RFz 16		578492	184,45
MULTICAPA	RFz 18 RFz 20		578638 578494	184,45 184,45
	RFz 25		578496	184,45
	RFz 32		578498	184,45
FITTINGS ESTÁNDAR	RFz 16		578492	184,45
PE-X	RFz 20		578494	184,45
	RFz 25 RFz 32		578496	184,45
FORNARA	B 16		578498 578468	184,45 193.28
ForPress	B 20		578472	193,28
	B 26		578474	213,00
	B 32		578476	213,00
	F 16		578456	168,68
	F 20		578460	168,68
	F 26 F 32		578462 578464	182,48 182,48
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,51
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,51
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,51
	F 32 S (PR-2B)	Mini Z8	574734 R	136,96
	H 16		578400	159,75
	H 20 H 26		578406 578410	159,75 159,75
	H 32		578412	159,75
	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364	177,08
	TH 20 S (PR-2B)**	Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16		578374	165,66
	U 20		578378	165,66
	U 26 ⁷⁾ U 32		578392 578382	194,31 194,31
FORZA	K16/P18		578592	184.45
WATER CRIMP	K/20		578594	184,45
(AUS)	K/25		578596	184,45
	K32		578598	184,45
	K1/40		578600	184,45
FORZA STAINLESS Water Crimp	K16/P18		578592 578594	184,45
FORZA	K/20 U 16		578374	184,45 165,66
STESSO PEX	U 20		578378	165,66
WATER AND GAS	U 25		578380	165,66
CRIMP AUS)	U 32		578382	194,31
	U 40		578386	236,66
FORZA	K16/P18		578592	184,45
GAS CRIMP (AUS)	K/20 K/25		578594 578596	184,45 184,45
(NOO)	K32		578598	184,45
	K1/40		578600	184,45
			578630	151,86
FORZA	VAU 15 (OD 12,7 mm)		370030	.0.,00
COPPER V PRESS	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm)		578632	151,86
FORZA Copper v press (AUS)	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm)		578632 578634	151,86 151,86
COPPER V PRESS	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm) VAU 32 (OD 31,8 mm)	Min: 70	578632 578634 578636	151,86 151,86 159,75
COPPER V PRESS	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm)	Mini Z8 Mini Z8	578632 578634	151,86

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
FORZA STAINLESS V PRESS	V 15 V 22		578328 578334	146,98 146,98
(AUS)	V 28		578336	146,78
	V 35		578604	178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51 124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
FRABO	M 15		578312	146,98
FRABOPRESS 316 GAS M	M 18 M 22		578314 578316	146,98 146,98
310 UA3 M	M 28		578318	146,76
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
FRABO	V 15		578328	146,98
FRABOPRESS 316 GAS V	V 18 V 22		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35		578604	178,12
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R	124,51 124,51
	V 22 S (PR-2B)	Mini Z8	574756 R 574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
FRABO FRABOPRESS	M 15 M 18		578312 578314	146,98 146,98
316 M	M 22		578316	146,76
	M 28		578318	146,98
	M 35		578390	178,12
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Mini Z8	574740 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
FRABO	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
FRABOPRESS	V 12 V 15		578324 578328	146,98 146,98
316 V	V 18		578332	146,98
	V 22		578334	146,98
	V 28 V 35		578336 578604	146,98 178.12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
FRABO	V 12		578324	146,98
FRABOPRESS	V 15		578328	146,98 146,98
CHROME	V 18		578332	
	V 22		578334	
	V 22 V 12 S (PR-2B)	Mini Z8	578334 574748 R	146,98
	V 12 S (PR-2B) V 15 S (PR-2B)	Mini Z8	574748 R 574752 R	146,98 124,51 124,51
	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574748 R 574752 R 574756 R	146,98 124,51 124,51 124,51
FRABO	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8	574748 R 574752 R 574756 R 574758 R	146,98 124,51 124,51 124,51 124,51
FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18	Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314	146,98 124,51 124,51 124,51 124,51 146,98 146,98
FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18	Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316	146,98 124,51 124,51 124,51 124,51 146,98 146,98
FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18 M 22 M 22	Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98
FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18	Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 178,12
FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 12 S (PR-2B) M 15 M 12 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51
FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 28 (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51
FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R	146,98 124,51 124,51 124,51 146,98 146,98 178,12 124,51 124,51 124,51 124,51
FRABOPRESS C-Steel M	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 28 (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R	146,98 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51 124,51 136,96
FRABOPRESS C-STEEL M FRABO FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574740 R 574744 R 574746 R 578324 578324	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51 124,51 136,96 146,98
FRABOPRESS C-Steel M	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B) M 15 M 18 M 22 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 574746 R 578328 578328 578332	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51 124,51 146,98 146,98
FRABOPRESS C-STEEL M FRABO FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18 M 28 M 35 M 35 M 15 (PR-2B) M 15 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) V 12 V 15 V 12 V 15 V 18 V 22	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574746 R 574746 R 578324 578324 578324 578332	146,98 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51 136,96 146,98 146,98 146,98 146,98
FRABO C-STEEL M FRABO FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B) M 15 M 18 M 22 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 574746 R 578328 578328 578332	146,98 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51 124,51 124,51 146,98 146,98 146,98 146,98 146,98 146,98 146,98
FRABO C-STEEL M FRABO FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B) W 15 M 18 M 12 M 22 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 25 V 15 V 16 V 17 V 18 V 19 V 19 V 19 V 19 V 19 V 19 V 19 V 19	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578324 578324 578334 578336 578404 574748 R	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51 136,96 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 17
FRABO C-STEEL M FRABO FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 15 S (PR-2B) M 15 S (PR-2B) M 16 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574746 R 574746 R 574746 R 578324 578324 578334 578334 578334 578334 578336 578604 574748 R 574748 R	146,98 124,51 124,51 124,51 124,51 124,51 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98
FRABO C-STEEL M FRABO FRABOPRESS	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 15 S (PR-2B) M 16 S (PR-2B) M 28 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) V 12 V 15 V 18 V 12 V 15 V 18 V 12 V 15 V 18 V 18 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574756 R 574756 R 574756 R 578312 578314 578316 578318 578390 574738 R 574740 R 574740 R 574746 R 578324 578324 578324 578334 578336 578604 574745 R 574745 R	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98
	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 15 S (PR-2B) M 15 S (PR-2B) M 16 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 12 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574748 R 574752 R 574756 R 574758 R 578312 578314 578316 578318 578390 574738 R 574740 R 574746 R 574746 R 574746 R 578324 578324 578334 578334 578334 578334 578336 578604 574748 R 574748 R	146,98 124,51 124,51 124,51 124,51 146,98 146,98 146,98 178,12 124,51 124,51 136,96 146,98 146,98 146,98 146,98 146,98 146,98 146,98 146,98 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 178,12 17

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	
RABO	M 12		578310	146,9
RABOPRESS	M 15		578312	146,9
AS M	M 18		578314	146,9
	M 22		578316	146,9
	M 28		578318	146,9
	M 35		578390	178,1
	M 12 S (PR-2B)	Mini Z8	574736 R	124,5
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
RABO	V 12		578324	146,9
RABOPRESS	V 15		578328	146,9
AS V	V 18		578332	146,9
	V 22		578334	146,9
	V 28		578336	146,9
	V 35		578604	178,1
	V 12 S (PR-2B)	Mini Z8	574748 R	124,5
	V 15 S (PR-2B)	Mini Z8	574752 R	124,5
	V 18 S (PR-2B)	Mini Z8	574756 R	124,5
	V 22 S (PR-2B)	Mini Z8	574758 R	124,5
	V 28 S (PR-2B)	Mini Z8	574760 R	124,5
	V 35 S (PR-2B)	Mini Z8	574762 R	136,9
RABO	V 12	20	578324	146,9
RABOPRESS	V 12 V 15		578328	146,9
OMBI	V 18		578332	146,9
וטויוטו				
	V 22		578334	146,9
	V 28		578336	146,9
	V 35		578604	178,1
	V 12 S (PR-2B)	Mini Z8	574748 R	124,5
	V 15 S (PR-2B)	Mini Z8	574752 R	124,5
	V 18 S (PR-2B)	Mini Z8	574756 R	124,5
	V 22 S (PR-2B)	Mini Z8	574758 R	124,5
	V 28 S (PR-2B)	Mini Z8	574760 R	124,5
	V 35 S (PR-2B)	Mini Z8	574762 R	136,9
RABO	M 12		578310	146,9
RABOPRESS M	M 15		578312	146,9
	M 18		578314	146,9
	M 22		578316	146,9
	M 28		578318	146,9
	M 35		578390	178,1
	M 12 S (PR-2B)	Mini 78	574736 R	124,5
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8		
			574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
RABO	V 15		578328	146,9
RABOPRESS	V 18		578332	146,9
OLAR	V 22		578334	146,9
	V 28		578336	146,9
	V 35		578604	178,1
	V 15 S (PR-2B)	Mini Z8	574752 R	124,5
	V 18 S (PR-2B)	Mini Z8	574756 R	124,5
	V 22 S (PR-2B)	Mini Z8	574758 R	124,5
	V 28 S (PR-2B)	Mini Z8	574760 R	124,5
	V 35 S (PR-2B)	Mini Z8	574762 R	136,9
RABO	V 12		578324	146,9
RABOPRESS V	V 15		578328	146,9
	V 18		578332	146,9
	V 10 V 22		578334	146,9
	V 28		578336	146,9
	V 35		578604	178,1
	V 12 S (PR-2B)	Mini Z8	574748 R	124,5
	V 15 S (PR-2B)	Mini Z8	574752 R	124,5
	V 18 S (PR-2B)	Mini Z8	574756 R	124,5
	V 22 S (PR-2B)	Mini Z8	574758 R	124,5
	V 28 S (PR-2B)	Mini Z8	574760 R	124,5
	V 35 S (PR-2B)	Mini Z8	574762 R	136,9
änkische	F 16		578456	168,6
	F 20		578460	168,6
pex-dun XS	F 26		578462	182,4
pex-duo XS	1 40		578464	182,4
pex-duo XS	F 32			
pex-duo XS	F 32	M:=: 70	574728 R	124,5
lpex-duo XS	F 16 S (PR-2B)**	Mini Z8	E2/200 P	101
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)**	Mini Z8	574730 R	
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)**	Mini Z8 Mini Z8	574732 R	124,5
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)**	Mini Z8		124,5
pex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)**	Mini Z8 Mini Z8	574732 R	124,5 136,9
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)** F 32 S (PR-2B)**	Mini Z8 Mini Z8	574732 R 574734 R	124,5 136,9 177,0
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)** F 32 S (PR-2B)** TH 16	Mini Z8 Mini Z8	574732 R 574734 R 578352 R	124,5 136,9 177,0 177,0
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)** F 32 S (PR-2B)** TH 16 TH 20	Mini Z8 Mini Z8	574732 R 574734 R 578352 R 578358 R	124,5 124,5 136,9 177,0 177,0 177,0
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)** F 32 S (PR-2B)** TH 16 TH 20 TH 26 TH 32	Mini 28 Mini 28 Mini 28	574732 R 574734 R 578352 R 578358 R 578362 R 578364	124,5 136,9 177,0 177,0 177,0
lpex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)** F 32 S (PR-2B)** TH 16 TH 20 TH 26 TH 32 TH 16 S (PR-2B)**	Mini 28 Mini 28 Mini 28 Mini 28	574732 R 574734 R 578352 R 578358 R 578362 R 578364 574782 R	124,5 136,9 177,0 177,0 177,0 177,0
Jex-duo XS	F 16 S (PR-2B)** F 20 S (PR-2B)** F 26 S (PR-2B)** F 32 S (PR-2B)** TH 16 TH 20 TH 26 TH 32	Mini 28 Mini 28 Mini 28	574732 R 574734 R 578352 R 578358 R 578362 R 578364	124,5 136,9 177,0 177,0

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Fränkische alpex F50 PROFI	F 16 F 20		578456 578460	168,68 168,68
atpex 1 Ju 1 Kuri	F 26		578462	182,48
	F 32		578464	182,48
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Mini Z8 Mini Z8	574728 R 574730 R	124,51 124,51
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,51
	F 32 S (PR-2B)**	Mini Z8	574734 R	136,96
	H 16 H 20		578400 578406	159,75 159,75
	H 26		578410	159,75
	H 32		578412	159,75
	TH 16 TH 20		578352 R 578358 R	177,08 177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)** U 16	Mini Z8	574798 R 578374	136,96 165,66
	U 20		578378	165,66
(DN 26)	U 25		578380	165,66
	U 32 VP 16		578382 578482	194,31 176,56
	VP 20		578484	176,56
	VP 32		578488	195,25
Fränkische alpex L	Fz 40		578478	247,15
агрех С		G		
gabotherm H+S	TH 10		578342	177,08
	TH 12		578346	177,08
	TH 14 TH 15		578348 578350	177,08
	TH 16		578352 R	177,08 177,08
	TH 17		578354	177,08
	TH 18		578356	177,08
	TH 20 TH 25		578358 R 578360	177,08 177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40 TH 10 S (PR-2B)**	Mini Z8	578624 574772 R	234,69 124,51
	TH 12 S (PR-2B)**	Mini Z8	574772 R	124,51
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 15 S (PR-2B)** TH 16 S (PR-2B)**	Mini Z8 Mini Z8	574780 R 574782 R	124,51 124,51
	TH 17 S (PR-2B)**	Mini Z8	574784 R	124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574772 R 574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
Gallagher USA YogaPipe ACR	H 12 (¼")		578396	159,75
Togaripe ACK	U 14 (¾") U 16 (½")		578372 578374	174,38 165,66
	U 18 (5/8")		578376	165,66
	U 20 (3¼")		578378	165,66
	U 25 (%") U 32 (1%")		578380 578382	165,66 194,31
Geberit Mapress	M 12		578310	146,98
C-STAHL	M 15		578312	146,98
	M 18 M 22		578314 578316	146,98 146,98
	M 28		578318	146,98
	M 35		578390	178,12
	M 12 S (PR-2B) M 15 S (PR-2B)	Mini Z8 Mini Z8	574736 R 574738 R	124,51 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
Geberit Mapress	M 22	PHIII 20	578316	146,98
C-STAHL Sprinkler nass	M 28		578318	146,98 146,98
Geberit Mapress Edelstahl	M 12 M 15		578310 578312	146,98
Lutibidili	M 15 M 18		578312 578314	146,98 146,98
	M 22		578316	146,78
	M 28		578318	146,98
	M 35 M 12 S (PR-2B)	Mini Z8	578390 574736 R	178,12 124,51
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
				,

€

193,28

193 28

193,28

213,00

213 00 168,68

168,68

182.48

182,48

124,51

124.51

124,51

136.96

159,75

159,75

159.75

159,75

159,75

159.75

177,08

177,08

177.08

177.08 177.08

234,69

124,51

124.51

124.51

124,51

165.66

165,66

165,66

165 66 194,31

236,66

159 75

159,75

159.75 159.75

177,08

177,08 177.08

177,08

124.51

124.51

124,51

136.96

165,66

165,66

194.31

159,75

159,75

159.75

177,08

177,08

177.08

177,08

124,51 124,51

124,51

136,96 165,66

194 31

159,75

159,75

159 75

159,75

177,08

177.08

177,08

177,08

234.69 165,66

165.66

194.31

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.
Geberit Mapress	M 15	, ,	578312	146,98	General Fittings	B 16		578468
Edelstahl Gas	M 18 M 22		578314 578316	146,98 146,98	Serie 5S00	B 18 B 20		578470 578472
	M 28		578318	146,78		B 26		578474
	M 35		578390	178,12		B 32		578476
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		F 16		578456
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		F 20		578460
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		F 26		578462
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96		F 32 F 16 S (PR-2B)**	Mini Z8	578464 574728 R
Geberit Mapress	M 22	MIIII ZO	578316	146,98		F 20 S (PR-2B)**	Mini Z8	574720 R
Edelstahl Sprinkler	M 28		578318	146,98		F 26 S (PR-2B)**	Mini Z8	574732 R
Geberit Mapress	M 12		578310	146,98		F 32 S (PR-2B)	Mini Z8	574734 R
Kupfer	M 15		578312	146,98		H 16		578400
	M 18		578314	146,98		H 18		578404
	M 22		578316	146,98		H 20 H 25		578406 578408
	M 28 M 35		578318 578390	146,98 178,12		H 26		578410
	м 12 S (PR-2B)	Mini Z8	574736 R	124,51		H 32		578412
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		TH 16		578352 R
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		TH 18		578356
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		TH 20		578358 R
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51		TH 25		578360
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96		TH 26 TH 32		578362 R 578364
Geberit Mapress	M 15		578312	146,98		TH 40		578624
Kupfer Gas	M 18 M 22		578314 578316	146,98 146,98		TH 16 S (PR-2B)**	Mini Z8	574782 R
	M 28		578318	146,98		TH 18 S (PR-2B)**	Mini Z8	574786 R
	M 35		578390	178,12		TH 20 S (PR-2B)**	Mini Z8	574788 R
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		TH 25 S (PR-2B)**	Mini Z8	574792 R
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		TH 26 S (PR-2B)**	Mini Z8	574794 R
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		TH 32 S (PR-2B)	Mini Z8	574798 R 578374
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51		U 16 U 18		578376
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96		U 20		578378
Geberit Mepla	G 16		578444	177,50		U 25		578380
	G 20 G 26		578446 578448	177,50 188,40		U 32		578382
	G 32		578450	201,16		U 40		578386
	G 40		578452	260,33	General Fittings	H 16		578400
Geberit Mepla	G 16		578444	177,50	Trident	H 20 H 26		578406 578410
Therm	G 20		578446	177,50		H 32		578412
	G 26		578448	188,40		TH 16		578352 R
Geberit Volex	TH 16		578352 R	177,08		TH 20		578358 R
	TH 20 TH 26		578358 R 578362 R	177,08 177,08		TH 26		578362 R
General Fittings	H 16		578400	159,75		TH 32		578364
5T00	H 20		578406	159,75		TH 16 S (PR-2B)**	Mini Z8	574782 R
	H 26		578410	159,75		TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R
	H 32		578412	159,75		TH 32 S (PR-2B)	Mini Z8	574774 R
	TH 16		578352 R	177,08		U 16		578374
	TH 20		578358 R	177,08		U 20		578378
	TH 26 TH 32		578362 R 578364	177,08 177,08		U 32		578382
	TH 40		578364 578624	234,69	General Fittings	H 16		578400
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51	Trident Gas	H 20 H 26		578406 578410
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		TH 16		578352 R
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		TH 20		578358 R
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96		TH 26		578362 R
	U 16		578374	165,66		TH 32		578364
	U 20 U 32		578378 578382	165,66		TH 16 S (PR-2B)**	Mini Z8	574782 R
	U 40		578386	194,31 236,66		TH 20 S (PR-2B)**	Mini Z8	574788 R
General Fittings	H 16		578400	159,75		TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R
Ewoprex	H 20		578406	159,75		U 16	MIIII ZO	574776 K
	H 26		578410	159,75		U 20		578378
	H 32		578412	159,75		U 32		578382
	TH 16		578352 R	177,08	Giacomini	H 16		578400
	TH 20		578358 R	177,08	Raccordi RM	H 20		578406
	TH 26		578362 R	177,08	Giacomini	H 26		578410
	TH 32 TH 40		578364 578624	177,08 234,69		H 32		578412
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51		TH 16 TH 20		578352 R 578358 R
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		TH 26		578362 R
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		TH 32		578364
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96		TH 40		578624
	U 16		578374	165,66		U 16		578374
	U 20		578378	165,66		U 20		578378
	U 32 U 40		578382 578386	194,31 236,66		U 32 U 40		578382 578386

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\scriptscriptstyle 2)}\,$ For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- ⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}\,$ Only use Mini pressing tongs identified by "VMP ½" G" on the pressing jaws for gas installations.
- 7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue. See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	€
Giacomini RM MULTIGAS	H 16 H 20		578400 578406	159,75 159,75
	H 26 H 32		578410 578412	159,75 159,75
	TH 16 TH 20		578352 R 578358 R	177,08 177,08
	TH 26 TH 32		578362 R 578364	177,08 177,08
	U 16		578374	165,66
	U 20 U 32		578378 578382	165,66 194,31
Giacomini Valvole Giacomini	V 15 V 18		578328 578332	146,98 146,98
serie R850V	V 22 V 28		578334 578336	146,98 146,98
	V 35 V 15 S (PR-2B)	Mini Z8	578604 574752 R	178,12 124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
	SA 15 SA 18	20	578514 578518	176,56 176,56
	SA 22		578520	176,56
	SA 28 M 15		578522 578312	176,56 146,98
	M 18 M 22		578314 578316	146,98 146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
Golan Pipe	M 35 S (PR-2B)	Mini Z8	574746 R 578374	136,96 165,66
Systems	U 20		578378	165,66
(Scandinavia) Alu-Pres	U 25 U 32		578380 578382	165,66 194,31
Grinnell G-PRESS	U 40 VUS ½" (OD 15,9 mm)		578386 578566	236,66 177,50
Copper Fittings	VUS ¾" (OD 22,2 mm) VUS 1" (OD 28,6 mm)		578568 578570	177,50 177,50
GS	VUS 11/4" (OD 34,9 mm) TH 14		578606 578348	177,50 177,08
Wärmesysteme System TH	TH 16 TH 20		578352 R 578358 R	177,08 177,08
Jysteili III	TH 26		578362 R	177,08
	TH 32 TH 40		578364 578624	177,08 234,69
	TH 14 S (PR-2B)** TH 16 S (PR-2B)**	Mini Z8 Mini Z8	574778 R 574782 R	124,51 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
GS	TH 32 S (PR-2B) V 15	Mini Z8	574798 R 578328	136,96 146,98
Wärmesysteme System V	V 18 V 22		578332 578334	146,98 146,98
oystem v	V 28 V 35		578336 578604	146,98 178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
		Н		
HASTINIK	M 15		578312	146,98
Hastinik/Hitpress	M 18 M 22		578314 578316	146,98 146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
heima24	M 35 S (PR-2B) TH 16	Mini Z8	574746 R 578352 R	136,96 177.08
	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 32		578364	177,08
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66
	U 20 U 32		578378 578382	165,66 194,31
HELIROMA Klimapress	U 16 U 20		578374 578378	165,66 165,66
	U 25		578380	165,66
HEI IDO	U 32 U 40		578382 578386	194,31 236,66
HELIROMA Klimapress PPSU	U 16 U 20		578374 578378	165,66 165,66
	U 25 U 32		578380 578382	165,66 194,31
Henco	TH 14 TH 16		578348 578352 R	177,08 177,08
	TH 18 TH 20		578356	177,08
	TH 26		578358 R 578362 R	177,08 177,08
	HE 32		578370 R	212,06

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Herotec tempusPRESS	H 16 H 20		578400 578406	159,75 159,75
PLUS	H 25 H 32		578408 578412	159,75 159,75
	RFz 16 RFz 20		578492 578494	184,45 184,45
	RFz 25 RFz 32		578496 578498	184,45 184,45
	TH 16		578352 R	177,08
	TH 20 TH 25		578358 R 578360	177,08 177,08
	TH 32 TH 40		578364 578624	177,08 234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574792 R	124,51 124,51
	TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66
	U 20 U 25		578378 578380	165,66 165,66
	U 32 U 40		578382	194,31
Herotec	H 16		578386 578400	236,66 159,75
tempusPRESS PLUS PPSU	H 20 H 25		578406 578408	159,75 159,75
	H 32 TH 16		578412 578352 R	159,75 177,08
	TH 20		578358 R	177,08
	TH 25 TH 32		578360 578364	177,08 177,08
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574792 R	124,51 124.51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16 U 20		578374 578378	165,66 165,66
	U 25 U 32		578380 578382	165,66 194,31
HERZ PIPEFIX	U 40 TH 10		578386 578342	236,66 177,08
HERZ PIPEFIX	TH 16		578352 R	177,08
	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 32 TH 40		578364 578624	177,08 234,69
	TH 10 S (PR-2B)** TH 16 S (PR-2B)**	Mini Z8	574772 R	124,51
	TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)**	Mini Z8 Mini Z8	574794 R 574798 R	124,51 136,96
HIDRONIX MULTIGAS	TH 16 TH 20		578352 R 578358 R	177,08 177,08
HIDRONIX	TH 26 TH 14		578362 R	177,08 177,08
MULTIPIPE	TH 16		578348 578352 R	177,08
	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 32 H 14		578364 578398	177,08 159,75
	H 16		578400	159,75
	H 18 H 20		578404 578406	159,75 159,75
	H 26 H 32		578410 578412	159,75 159,75
	U 14 U 16		578372 578374	174,38 165,66
	U 18		578376	165,66
	U 20 U 26 ⁷⁾		578378 578392	165,66 194,31
HIDRONIX	U 32 TH 14		578382 578348	194,31 177,08
UNICO	TH 16 TH 20		578352 R 578358 R	177,08 177,08
	TH 26		578362 R	177,08
	TH 32 H 14		578364 578398	177,08 159,75
	H 16 H 18		578400 578404	159,75 159,75
	H 20 H 26		578406 578410	159,75 159,75
	H 32		578412	159,75
	U 14 U 16		578372 578374	174,38 165,66
	U 18 U 20		578376 578378	165,66 165,66
	U 26 ⁷⁾ U 32		578392 578382	194,31 194,31
HITEC	TH 14		578348	177,08
Sistema Multistrato	TH 16 TH 18		578352 R 578356	177,08 177,08
	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 32 TH 40		578364 578624	177,08 234,69
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574786 R	124,51 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
UITUEDM ICCTUDI	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
HITHERM-ISOTUBI Numepress	M 15 M 18		578312 578314	146,98 146,98
	M 22 M 28		578316 578318	146,98 146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	(
HITHERM-ISOTUBI	M 15		578312	146,98	ICMA	TH 16		578352 R	177,0
HTpress	M 18		578314	146,98	Sempigas	TH 20		578358 R	177,08
	M 22		578316	146,98		TH 25 TH 26		578360 578362 R	177,08 177,08
	M 28 M 35		578318 578390	146,98 178,12		TH 32		578364	177,08
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51	Idrosanitaria	TH 32 S (PR-2B) TH 16	Mini Z8	574798 R 578352 R	136,96 177,08
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96	Bonomi	TH 20		578358 R	177,08
HITHERM-ISOTUBI	M 15		578312	146,98	Homegas	TH 26		578362 R	177,08
HTfire	M 18 M 22		578314 578316	146,98 146,98		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	M 28		578318	146,98		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	M 35		578390	178,12	Idrosanitaria	TH 26 S (PR-2B)** TH 16	Mini Z8	574794 R 578352 R	124,51 177,08
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51	Bonomi	TH 18		578356	177,08
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51	Idropress	TH 20		578358 R	177,08
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51	•	TH 26		578362 R	177,08
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51		TH 32		578364	177,08
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96		TH 40	M:-: 70	578624	234,69
HITHERM-ISOTUBI	M 15		578312	146,98		TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
HTair	M 18 M 22		578314 578316	146,98 146,98		TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	M 28		578318	146,78		TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	M 35		578390	178,12	IDROSISTEMI	TH 16		578352 R	177,08
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51	Ta-Press	TH 20		578358 R	177,08
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		TH 26		578362 R	177,08
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		TH 32 TH 40		578364 578624	177,08 234,69
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
Hopewell	M 15		578312	146,98		TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
press fit system	M 18 M 22		578314 578316	146,98 146,98		TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	M 28		578318	146,78		F 16		578456	168,68
	M 35		578390	178,12		F 20 F 26		578460 578462	168,68 182,48
hp praski	TH 10		578342	177,08		F 32		578464	182,48
BAVARIA-press	TH 12		578346	177,08		F 16 S (PR-2B)**	Mini Z8	574728 R	124,51
	TH 14		578348	177,08		F 20 S (PR-2B)**	Mini Z8	574730 R	124,51
	TH 16		578352 R	177,08		F 26 S (PR-2B)**	Mini Z8	574732 R	124,51
	TH 17		578354	177,08		F 32 S (PR-2B)	Mini Z8	574734 R	136,96
	TH 20 TH 25		578358 R 578360	177,08 177,08		Fz 40 H 16		578478 578400	247,15 159,75
	TH 26		578362 R	177,08		H 20		578406	159,75
	TH 32		578364	177,08		H 26		578410	159,75
	TH 40		578624	234,69		H 32		578412	159,75
	TH 10 S (PR-2B)**	Mini Z8	574772 R	124,51		U 16		578374	165,66
	TH 12 S (PR-2B)**	Mini Z8	574776 R	124,51		U 20		578378 578392	165,66
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51		U 26 ⁷⁾ U 32		578382	194,31 194,31
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51		U 40		578386	236,66
	TH 17 S (PR-2B)**	Mini Z8	574784 R	124,51		B 16		578468	193,28
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574792 R	124,51 124,51		B 20		578472	193,28
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		B 26		578474	213,00
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96	IDROTRADE	B 32 H 16		578476 578400	213,00 159,75
					Storm Multipinza	H 20		578406	159,75
						H 26		578410	159,75
						H 32		578412	159,75
ICMA	H 16		578400	159,75		TH 16		578352 R	177,08
Sempiter	H 20		578406	159,75		TH 20		578358 R	177,08
	H 25		578408	159,75		TH 26 TH 32		578362 R 578364	177,08 177,08
	H 26 H 32		578410 578412	159,75 159,75		THL 32		578368	177,08
	TH 16		578352 R	177,08		TH 40		578624	234,69
	TH 20		578358 R	177,08		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 25		578360	177,08		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26		578362 R	177,08		TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32		578364	177,08		TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66
	TH 40		578624	234,69		U 16 U 20		578378	165,66
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51	IDROTRADE	M 15		578312	146,98
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51	StormPRES ¹⁾	M 18		578314	146,98
	TH 26 S (PR-2B)**	Mini Z8	574794 R 574798 R	124,51		M 22		578316	146,98
	TH 32 S (PR-2B) U 16	Mini Z8	574798 K 578374	136,96 165,66		M 28		578318	146,98
	U 20		578378	165,66		M 35 M 15 C (DD_2R)	Min: 70	578390 574738 P	178,12
	U 25		578380	165,66		M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	U 26 ⁷⁾		578392	194,31		M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	U 20°′								
	U 32		578382	194,31		M 28 S (PR-2B)	Mini Z8	574744 R	124,51

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

	Pressing tongs Mini/	Driven by		
System	pressing rings	adapter tongs	ArtNo.	€
IDROTRADE StormSTEEL ¹⁾	M 12 M 15		578310 578312	146,98 146,98
	M 18		578314	146,98
	M 22 M 28		578316 578318	146,98 146,98
	M 35	W: : 70	578390	178,12
	M 12 S (PR-2B) M 15 S (PR-2B)	Mini Z8 Mini Z8	574736 R 574738 R	124,51 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574744 R	136,96
ILTA	M 15		578312	146,98
INOX/CHIBRO Pressfitting Cuni	M 18 M 22		578314 578316	146,98 146,98
ressitting cam	M 28		578318	146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574744 R 574746 R	136,96
ILTA	M 15		578312	146,98
INOX/CHIBRO Pressfitting inox	M 18 M 22		578314 578316	146,98 146,98
. rooontting mox	M 28		578318	146,98
	M 35 M 15 S (PR-2B)	Mini 78	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
Instantor	TH 16	PHHI LU	578352 R	177,08
Press System	TH 20 TH 26		578358 R	177,08
	TH 32		578362 R 578364	177,08 177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
Instantor	VI ½" (OD 14,7 mm)		578716	175,53
Copper Press Imperial	VI ¾" (UD 21,0 mm) VI 1" (OD 27,4 mm)		578718 578720	175,53 175,53
	VI ½" S (PR-2B)	Mini Z8	574850 R	124,51
	VI 3/4" S (PR-2B)	Mini Z8	574852 R	124,51
Instantor	VI 1" S (PR-2B) M 15	Mini Z8	574854 R 578312	124,51 146,98
Copper Press Metric	M 22		578316	146,98
	M 28 M 15 S (PR-2B)	Mini Z8	578318 574738 R	146,98
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
IPA IPANA Press	TH 10 TH 11,6		578342 578344	177,08 177,08
	TH 12		578346	177,08
	TH 14 TH 15		578348 578350	177,08
	TH 16		578352 R	177,08 177,08
	TH 17		578354	177,08
	TH 18 TH 20		578356 578358 R	177,08 177.08
	TH 22		578588	177,08
	TH 25		578360	177,08
	TH 26 TH 28		578362 R 578590	177,08 177,08
	TH 32		578364	177,08
	TH 40 TH 10 S (PR-2B)**	Mini Z8	578624 574772 R	234,69 124,51
	TH 11,6 S (PR-2B)**	Mini Z8	574772 R	124,51
	TH 12 S (PR-2B)**	Mini Z8	574776 R	124,51
	TH 14 S (PR-2B)** TH 15 S (PR-2B)**	Mini Z8 Mini Z8	574778 R 574780 R	124,51 124,51
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 17 S (PR-2B)**	Mini Z8	574784 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574786 R 574788 R	124,51 124,51
	TH 22 S (PR-2B)**	Mini Z8	574790 R	124,51
	TH 25 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574792 R 574794 R	124,51 124,51
	TH 28 S (PR-2B)**	Mini Z8	574794 R 574796 R	136,96
IDA TII	TH 32 S (PR-2B)**	Mini Z8	574798 R	136,96
IPA THu IPANA Press	TH 16 TH 20		578352 R 578358 R	177,08 177,08
II AIIA I I COO	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,51 136,96
IPALPEX	TH 14	21111 EV	578348	177,08
(Industrie du	TH 16		578352 R	177,08
Plastique et Accessoires)	TH 18 TH 20		578356 578358 R	177,08 177,08
nocessuli ES/	TH 26		578362 R	177,08
	THL 32		578368	177,08
IPLEX	TH 40 K16/P18		578624 578592	234,69 184,45
PIPELINES	KIU/FIU		J/037Z	104,43
AUSTRALIA				
Iplex Pro-fit IPLEX	K16/P18		578592	184,45
PIPELINES	K/20		578594	184,45
AUSTRALIA	K/25		578596	184,45
lplex K1 (Gas)	K32 K1/40		578598 578600	184,45 184,45
, 0,			0.0000	107,40

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	•
IPLEX	K16/P18		578592	184,4
PIPELINES Australia Iplex K2	K/20 K/25		578594 578596	184,4 184,4
ISOTUBI	M 15		578312	146,9
NUMEPRESS	M 18 M 22		578314 578316	146,9 146,9
	M 28		578318	146,9
	M 35	M:-: 70	578390	178,1
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,5 124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,5 136,9
IVAR	B 20	MIIII ZU	578472	193,2
ALPEX-GAS	B 26		578474	213,0
IVAR	B 32 B 14		578476 578466	213,0 193,2
Ivar-Press	B 16		578468	193,2
	B 18		578470	193,2
	B 20 B 26		578472 578474	193,2 213,0
	B 32		578476	213,0
IVAR	Fz 40 TH 16		578478 578352 R	247,1 177,0
MULTI PRESS	TH 20		578358 R	177,0
GAS ITALIA	TH 26		578362 R	177,0
	H 16 H 20		578400 578406	159,7 159,7
	H 26		578410	159,7
	U 16		578374	165,6
VAR	U 20 TH 16		578378 578352 R	165,6 177,0
Multi Press MP	TH 18		578356	177,0
	TH 20		578358 R	177,0
	TH 25 TH 26		578360 578362 R	177,0 177,0
	TH 32		578364	177,0
	TH 40	M:-: 70	578624	234,6
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574786 R	124,5 124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,5
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,5 136,9
	F 16		578456	168,6
	F 18 F 20		578458	168,6
	F 26		578460 578462	168,6 182,4
	F 32		578464	182,4
	Fz 40 F 16 S (PR-2B)**	Mini Z8	578478 574728 R	247,1 124,5
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,5
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,5
	F 32 S (PR-2B) H 16	Mini Z8	574734 R 578400	136,9 159,7
	H 18		578404	159,7
	H 20		578406	159,7
	H 25 H 26		578408 578410	159,7 159.7
	H 32		578412	159,7
	U 16 U 18		578374 578376	165,6 165,6
	U 20		578378	165,6
	U 25		578380	165,6
	U 26 ⁷⁾ U 32		578392 578382	194,3 194.3
	U 40		578386	236,6
	B 16		578468	193,2
	B 18 B 20		578470 578472	193,2 193,2
	B 26		578474	213,0
VAD.	B 32		578476	213,0
VAR Multi Press Leak	TH 16 TH 20		578352 R 578358 R	177,0 177,0
MPL)	TH 26		578362 R	177,0
	TH 32	Mini 70	578364	177,0
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,5 124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B) F 16	Mini Z8	574798 R 578456	136,9 168,6
	F 20		578460	168,6
	F 26		578462	182,4
	F 32 F 16 S (PR-2B)**	Mini Z8	578464 574728 R	182,4 124,5
	F 20 S (PR-2B)**	Mini Z8 Mini Z8	574728 R 574730 R	124,5
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,5
	F 32 S (PR-2B) H 16	Mini Z8	574734 R 578400	136,9 159,7
	H 16 H 20		578400 578406	159,7
	H 26		578410	159,7
	H 32 U 16		578412 578374	159,7 165,6
	U 20		578374	165,6
	U 26 ⁷⁾		578392	194,3
	U 32		578382 578448	
	U 32 B 16 B 20		578382 578468 578472	194,3 193,2 193,2

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	•
IVAR	TH 16		578352 R	177,0
Plastic Multi Press	TH 20		578358 R	177,0
Plastic Multi Press PMP	TH 25 TH 26		578360	177,0
	TH 32		578362 R 578364	177,0 177,0
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,9
	F 16		578456	168,6
	F 20 F 26		578460	168,6
	F 20 F 32		578462 578464	182,4 182,4
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,5
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,5
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,5
	F 32 S (PR-2B)	Mini Z8	574734 R	136,9
	H 16		578400	159,7
	H 20		578406	159,7
	H 25		578408	159,7
	H 26		578410	159,7
	H 32		578412	159,7
	U 16		578374	165,6
	U 20 U 25		578378 578380	165,6 165,6
	U 26 ⁷⁾		578392	194,3
	U 32		578382	194,3
	B 16		578468	193,2
	B 20		578472	193,2
	B 26		578474	213,0
	B 32		578476	213,0
VAR	TH 16		578352 R	177,0
Plastic Multi Press	TH 20		578358 R	177,0
Leak (PMPL)	TH 26		578362 R	177,0
	TH 32	M:-: 70	578364	177,0
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,5 124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B)	Mini Z8	574774 R 574798 R	136,9
	F 16	PIIII 20	578456	168,6
	F 20		578460	168,6
	F 26		578462	182,4
	F 32		578464	182,4
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,5
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,5
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,5
	F 32 S (PR-2B)	Mini Z8	574734 R	136,9
	H 16		578400	159,7
	H 20 H 26		578406 578410	159,7 159,7
	H 32		578412	159,7
	U 16		578374	165,6
	U 20		578378	165,6
	U 26 ⁷⁾		578392	194,3
	U 32		578382	194,3
	B 16		578468	193,2
	B 20		578472	193,2
	B 26		578474	213,0
	B 32		578476	213,0
VT Edelstahl-	M 15		578312	146,9
resssystem	M 18 M 22		578314	146,9
	M 28		578316 578318	146,9 146,9
	M 35		578390	178,
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
VT PRIPRESS	TH 16		578352 R	177,0
	TH 20		578358 R	177,0
	TH 26		578362 R	177,0
	TH 32		578364	177,0
	TH 40	W: : 70	578624	234,6
			574782 R	124,5
	TH 16 S (PR-2B)**	Mini Z8		
	TH 16 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8 Mini Z8	574788 R 574794 R	124,5 124,5

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
		J		
Jäger - Aquatec	H 14		578398	159,75
Aquapress H	H 16		578400	159,75
	H 17 H 18		578402 578404	159,75 159,75
	H 20		578404	159,75
	H 26		578410	159,75
	H 32		578412	159,75
	U 40		578386	236,66
Jäger – Aquatec	M 15		578312 578314	146,98
C-Stahl Press Typ M	M 18 M 22		578314 578316	146,98 146,98
11000 196 11	M 28		578318	146,98
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
Jäger - Aguatec	M 15	Filli 20	578312	146,98
Edelstahl	M 18		578314	146,98
Press Typ M	M 22		578316	146,98
	M 28		578318	146,98
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8 Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
Jäger - Aquatec	V 15		578328	146,98
Kupfer	V 18		578332	146,98
Press Typ V	V 22		578334	146,98
	V 28 V 35		578336 578604	146,98 178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
I AC	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
Jansen AG JANSEN COMISA	TH 14 TH 16		578348 578352 R	177,08 177,08
JANULII COMIUA	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
Jaraflex-	TH 14		578348	177,08
Presssystem	TH 16		578352 R	177,08
	TH 17		578354	177,08
	TH 18		578356	177,08
	TH 20 TH 25		578358 R 578360	177,08 177,08
	TH 26		578362 R	177,00
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 17 S (PR-2B)**	Mini Z8	574784 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574786 R 574788 R	124,51 124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	111 OE O (1 11 EB)			
	VUS ½" (OD 15,9 mm)		578566	177,50
JUNGW00 JWPress				177,50 177,50 177,50

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- 7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

KAM-therm Press LBP	System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	€
KAM-therm Press LIBP 11 16 57835 R 177.08 TA 12 1720 57835 R 177.08 TA 25 174.08 TA 25 174.08 TA 26 174.08 TA 27 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA 28 174.08 TA			K		
TH 20	KAN KAN-therm Press LBP				
11 12 17 18 17 18 17 18 17 18 18		TH 20		578358 R	177,08
THE STATE		TH 26		578362 R	177,08
TH 16 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 25 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 26 (PP-20)** Mini 28 57,772 R 124,51 TH 27 (PP-20)** Mini 28 57,772 R 124,51 TH 27 (PP-20)** Mini 28 57,772 R 124,51 TH 27 (PP-20)** Mini 28 57,772 R 124,51 TH 27 (PP-20)** Mini 28 57,772 R 124,51 TH 27 (PP-20)** Mini 28 57,772 R 124,51 TH 27 (PP-20)** Mini 28 57,772 R 124,51 TH 27 (PP-20)** Mini 28 57,772 R 124,51 TH 28 (PP-20)** Mini 28 57,772 R 124,51 TH 28 (PP-20)** Mini 28 57,772 R 124,51 TH 28 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29 (PP-20)** Mini 28 57,772 R 124,51 TH 29		TH 40		578624	234,69
TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28 \$7,479 R 124,51 TH 25 (PR-28)** Mini 28		TH 14 S (PR-2B)** TH 16 S (PR-2B)**			
TH 25 (PR-2B)		TH 20 S (PR-2B)**			
14 578372 174,38 175,48 175,49 175,49 175,66 175,78 175,66 175,78 175,66 175,78 175,66 175,78 175,66 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,78 175,7		TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
120		U 14	MINI Z8	578372	174,38
1922 \$78382 \$79.38 \$79.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73.38 \$73					
KAN		U 32		578382	194,31
M 22	KAN	M 15		578312	146,98
M 35 (PR-28) Mini 28 574748 P. 124,51 Mini 28 174748 P. 124,51 Mini 28 174748 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174742 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28 174749 P. 124,51 Mini 28	KAN-therm Inox				
M 15 S [PR-28] Mini 28 574748 R 124,51 Mini 28 574749 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748 R 124,51 Mini 28 574748		M 28 ¹⁾		578318	146,98
M 22 (\$PR-28) Min 28 \$74742 R 124,51 M 28 (\$PR-28) Min 28 \$74746 R 124,51 M 35 (\$PR-28) Min 28 \$74746 R 124,51 M 15 \$73310 146,98 M 16 \$73311 146,98 M 18 M 18 \$73311 146,98 M 28 \$73318 146,98 M 28 \$73318 146,98 M 28 \$73318 146,98 M 28 \$73318 146,98 M 12 S (\$PR-28) Min 28 \$73338 124,51 M 15 (\$PR-28) Min 28 \$74738 R 124,51 M 18 S (\$PR-28) Min 28 \$74738 R 124,51 M 18 S (\$PR-28) Min 28 \$74744 R 124,51 M 18 S (\$PR-28) Min 28 \$74746 R 132,94 M 28 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 29 (\$PR-28) Min 28 \$74746 R 132,94 M 20 (\$PR-28) Min 28 \$74746 R 132,94 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-28) Min 28 \$74748 R 124,51 M 20 (\$PR-		M 15 S (PR-2B)		574738 R	124,51
KAN M 12					
KAN M 12 KAN-therm Steel M 15 M 18" M 18" M 22 M 29" M 20" M 28" M 28 PR-28) M 12 S (PR-28) M 15 S (PR-28) M 18 S (PR-28) M 18 S (PR-28) M 18 S (PR-28) M 18 S (PR-28) M 18 S (PR-28) M 18 S (PR-28) M 18 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19 S (PR-28) M 19					
M 18	KAN	M 12	MIIII 20	578310	146,98
M 28	KAN-therm Steel	M 18 ¹⁾			
M 35					
M 15 15 17 28 28 27 28 27 28 27 28 28		M 35	M:=: 70	578390	178,12
M 22 S (PR-2B) Mini 28 574742 R 124,51 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 136,96 Mini 28 574746 R 177.08 Mini 28 57835 R 177.08 Mini 28 57835 R 177.08 Mini 28 578346 M 177.08 Mini 28 578346 M 177.08 Mini 28 57836 M 177.08 Mini 28 57837 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 5782 R 124,51 Mini 28 57837 R 136,56 M 125 Mini 28 57837 R 136,56 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125 M 125		M 15 S (PR-2B)	Mini Z8	574738 R	124,51
M 28S (PR-ZB) Mini ZB 5747.44 R 124.51 Mini ZB 5747.44 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 136.96 Mini ZB 5747.46 R 124.51 Mini ZB 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R 124.51 Mini ZB 5747.46 R					
KAN KAN-Iherm H 14 KAN-Iherm H 14 KAN-Iherm H 14 S783.88 R 177.08 H 125 H 125 F 1783.58 R 177.08 H 125 F 1783.58 R 177.08 H 125 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 177.08 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 1783.58 F 1783.58 R 17		M 28 S (PR-2B)	Mini Z8	574744 R	124,51
UltraPRESS TH 20 TH 25 TH 25 TH 25 TH 25 TH 26 TH 26 TH 32 TH 32 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 TH 40 T	KAN	TH 14	MIIII 20	578348	177,08
TH 126 TH 122 TH 142 TH 142 TH 142 TH 142 TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 145 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)** TH 125 (PR-2B)* TH 125 (PR-2B)* TH 125 (PR-2B)* T	KAN-therm UltraPRESS				
TH 12					177,08
TH 14 S (PR-2B)** Mini 28 574778 R 124,51 TH 15 S (PR-2B)** Mini 128 574778 R 124,51 TH 20 S (PR-2B)** Mini 128 574778 R 124,51 TH 20 S (PR-2B)** Mini 128 574778 R 124,51 TH 25 S (PR-2B)** Mini 128 574778 R 124,51 TH 25 S (PR-2B)** Mini 128 574778 R 124,51 TH 25 S (PR-2B)** Mini 128 574778 R 124,51 TH 25 S (PR-2B)** Mini 128 574778 R 124,51 TH 20 S (PR-2B)** Mini 128 574778 R 124,51 TH 20 S (PR-2B)** Mini 128 574778 R 136,76 U 10 16 578372 174,30 U 10 16 578378 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578380 165,66 U 1266** 578374 165,66 U 1260** 578378 165,66 U 1260** 578378 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275** 578380 165,66 U 1275**		TH 32		578364	177,08
TH 20 S (PR-2B)** Mini 78 574788 R 124,51 TH 25 S (PR-2B)** Mini 28 57479 R 124,51 TH 26 S (PR-2B)** Mini 28 57479 R 124,51 TH 32 S (PR-2B)* Mini 28 57479 R 124,51 TH 32 S (PR-2B)* Mini 28 57479 R 124,51 TH 32 S (PR-2B)* Mini 28 57479 R 124,51 TH 32 S (PR-2B)* Mini 28 57479 R 124,51 TH 32 S (PR-2B)* Mini 28 578372 174,38 TH 20 S (PR-2B)* TH 20 S (PR-2B)* TH 20 S (PR-2B)* TH 20 S (PR-2B)* TH 20 S (PR-2B)* TH 20 S (PR-2B)* Mini 28 574738 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R 124,51 TH 20 S (PR-2B)* Mini 28 574740 R TH 20 S (PR-2B)* Mini 28 574740 R TH 20 S (PR-2B)* Mini 28 574740 R TH 20 S (PR-2B)* Mini 28 574740 R TH 20 S (PR-2B)* Mini 28 TH 20 S (PR-2B)* TH 20 S (PR-2B)* Mini 28 TH 20 S (PR-2B)* TH 20 S (PR-2B)* Mini 28 TH 20 S (PR-2B)* TH 20 S (PR-2B)* Mini 28 TH 2		TH 14 S (PR-2B)**			124,51
TH 25 S (PR-2B)** Mini 28 57479 R 124,51 TH 32 S (PR-2B)* Mini 28 57479 R 136,96 U114 578377 15.56 U120 578378 136,96 U125 578378 15.56 U126** 578380 15.56 U126** 578380 15.56 U126** 578380 15.56 U126** 578382 194,31 U140 578381 146,98 EK EK ELIT M15 (PR-2B) Mini 28 574740 R 124,51 M15 (PR-2B) Mini 28 574740 R 124,51 M15 (PR-2B) Mini 28 574740 R 124,51 M18 S (PR-2B) Mini 28 574740 R 124,51 M18 S (PR-2B) Mini 28 574740 R 124,51 M18 S (PR-2B) Mini 28 574740 R 124,51 M18 S (PR-2B) Mini 28 574740 R 124,51 M18 S (PR-2B) Mini 28 574740 R 124,51 M18 S (PR-2B) Mini 28 574740 R 124,51 M19 M19 M19 M19 M19 M19 M19 M19 M19 M19					
TH 32 S (PR-2B)		TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
U 16 578374 15.56 U 20 578378 165.66 U 27 578378 165.66 U 27 578378 165.66 U 27 578378 165.66 U 27 578372 174.31 U 32 578380 134.31 U 32 578386 236.66 U 27 578372 174.31 U 32 578386 236.66 U 27 578372 174.31 165.66 U 27 578372 174.31 165.66 U 27 578372 174.31 165.66 U 27 578372 174.31 165.66 EK EKELIT M 15 578318 146.78 M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S FR-2B M 18 S F		TH 32 S (PR-2B)		574798 R	136,96
U 25 578380 15.56 U 267 578392 194,31 U 32 578382 194,31 U 32 578386 23.66 KE KELIT M 15 578316 146,98 COPPERFIX M 18 578311 146,98 M 20 578316 146,98 M 21 578316 146,98 M 22 578316 146,98 M 35 578310 181,12 M 18 S (PR-2B) Mini ZB 574740 R 124,51 M 18 S (PR-2B) Mini ZB 574740 R 124,51 M 22 S Mini ZB 574740 R 124,51 M 20 S (PR-2B) Mini ZB 574744 R 124,51 M 20 S (PR-2B) Mini ZB 574744 R 124,51 M 20 S (PR-2B) Mini ZB 574744 R 136,98 KE KELIT U 16 578376 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 578378 155,66 U 20 57					
U 26" 578392 194,31 U 30" 578392 194,31 U 30" 578386 236,66					
KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 17 578374 155.66 KE KELIT U 18 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 16 578374 155.66 KE KELIT U 17 578374 155.66 KE KELIT U 18 578374 155.66 KE KELIT U 19 578374 155.66 KE KELIT U 19 578374 155.66 KE KELIT U 10 578374 155.66 KE KELIT U 17 578374 155.66 KE KELIT U 18 578374 155.66 KE KELIT U 19 578374 155.66 KE KELIT U 10 578374 155.66 KE KELIT U 17 578374 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 17 578378 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 KE KELIT U 18 578376 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380 155.66 U 20 578380		U 26 ⁷⁾		578392	194,31
COPPERIX M 18 Kupfer M 22		U 40		578386	236,66
KUPÍER M 28 M 28 M 35 M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 36 S (PR-2B) M 37 S (PR-2B) M 37 S (PR-2B) M 38 S (PR-2B) M 38 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 39 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30 S (PR-2B) M 30					
M 35	Kupfer				146,98
M 18 S (PR-2B) Mini 28 574740 R 124,51 M 28 S (PR-2B) Mini 28 574744 R 124,51 M 38 S (PR-2B) Mini 28 574744 R 124,51 M 35 S (PR-2B) Mini 28 574744 R 124,51 M 35 S (PR-2B) Mini 28 574744 R 124,51 M 35 S (PR-2B) Mini 28 574744 R 136,96 KE KELIT U 16 578374 165,66 U 20 578378 165,66 U 20 578380 154,66 U 20 578380 154,66 KE KELIT U 16 578376 165,66 KE KELIT U 16 578376 165,66 U 20 578380 156,66 U 20 578380 156,66 U 20 578380 156,66 U 20 578380 156,66 U 20 578380 156,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578380 236,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386		M 35	W: : 70	578390	178,12
M 28 S (PR-2B) Mini 28 574744 R 124,51 M 35 S (PR-2B) Mini 28 574744 R 134,51 KE KELIT U 16 578374 165,66 KELIT KELOX U 18 578376 165,66 U 20 578380 165,66 U 20 578380 165,66 U 32 578382 194,31 U 40 578376 165,66 KE KELIT U 16 578374 165,66 KE LOX-PPSU-W U 18 578376 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578382 194,31 U 40 578386 236,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE LOX-ULTRAX U 18 578376 165,66 U 20 578387 165,66 U 20 578387 165,66 U 20 578387 165,66 KE KELIT U 16 578376 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578378 165,66 U 20 578380 194,31 U 20 578386 236,66 KE KELIT U 16 578378 165,66 U 20 578380 194,31 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578378 165,66 KE KELIT U 16 578374 165,66 U 20 578380 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U					
M 35 S (PR-2B) Mini ZB 574746 R 136,96 KE KELIT U 16 578374 165,66 KE LIT KELOX U 18 578376 165,66 U 20 578378 165,66 U 25 578380 236,66 KE KELIT U 16 578376 165,66 KE KELIT U 16 578376 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 U 20 578378 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578376 165,66 KE KELIT U 16 578378 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578378 165,66 KE KELIT U 16 578378 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578380 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 KE KELIT U 16 578374 165,66 U 20 578386 236,66 U 20 578386 23					
KELIT KELOX U 18 578376 165.66 U 20 578378 165.66 U 20 578380 165.66 U 32 578380 165.66 KE KELIT U 16 578374 165.66 KE KELOX-PPSU-W U 18 578376 165.66 U 20 578380 165.66 U 20 578380 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578378 165.66 KE KELIT U 16 578378 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 17 U 19 U 19 U 19 U 19 U 19 U 19 U 19	VE VELIT	M 35 S (PR-2B)		574746 R	136,96
U 25	KELIT KELOX	U 18		578376	165,66
U 40 578386 236,66 KE KELIT U 16 578374 165,66 KELDX-PPSU-W U 18 578376 165,66 U 20 578378 165,66 U 25 578380 165,66 U 32 578382 194,31 U 40 578376 236,66 KE KELIT U 16 578374 165,66 KELDX-ULTRAX U 18 578376 165,66 U 20 578380 165,66 U 21 578382 194,31 U 40 578382 194,31 U 40 578374 165,66 KE KELIT U 16 578374 165,66 KE KELOX-ULTRAX-W U 18 578376 165,66 KE KELOX-ULTRAX-W U 18 578376 165,66 U 20 578380 165,66 U 20 578380 165,66 KE KELIT U 10 578376 165,66 KE KELIT U 10 578380 165,66 KE KELIT U 10 578380 165,66 U 20 578380 165,66 U 20 578374 165,66 KE KELIT U 18 578374 165,66 KE KELIT					
KE KELIT U 16 578374 165.66 KELDX-PPSU-W U 18 578376 165.66 U 20 578378 165.66 U 20 578380 165.66 U 32 578380 165.66 KE KELIT U 40 578374 165.66 KE KELIT U 18 578374 165.66 U 20 578378 165.66 U 20 578378 165.66 U 20 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 U 20 578382 194.31 U 20 578382 194.31 U 20 578382 194.31 U 20 578383 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 18 578374 165.66 KE KELIT U 18 578374 165.66 KE KELIT U 19 578380 165.66 U 20 578380 165.66 U 20 578380 165.66 KE KELIT U 10 578374 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66					194,31
U 20 578378 165.66 U 25 578380 165.66 U 25 578380 194.31 U 40 578386 236.66 KE KELIT U 16 578374 165.66 KELOX-ULTRAX U 18 578376 165.66 U 25 578380 165.66 U 25 578380 165.66 U 25 578380 165.66 KE KELIT U 16 578386 236.66 KE KELIT U 16 578378 165.66 KE KELIT U 17 578386 236.66 KE KELIT U 18 578378 165.66 KE KELIT U 18 578378 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 10 578378 165.66 KE KELIT U 18 578378 165.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE K	KE KELIT	U 16		578374	165,66
U 32 578382 194.31	KELUX-PPSU-W				
U 40 578386 236,66 KE KELIT U 16 578374 165,66 KELOX-ULTRAX U 18 578378 165,66 U 20 578378 165,66 U 22 578380 165,66 U 32 578386 236,66 KE KELIT U 16 578374 165,66 KE KELOX-ULTRAX-W U 18 578374 165,66 U 20 578378 165,66 U 25 578300 165,66 U 22 578382 194,31 U 20 578386 236,66 KE KELIT U 16 578378 165,66 KE KELOX-WINDOX-U U 18 578376 165,66 KE KELOX-WINDOX-U U 18 578378 165,66 KE KELIT U 20 578380 236,60 KE KELIT U 16 578386 236,60 KE KELIT U 16 578382 194,31 U 20 578386 236,60 KE KELIT U 16					
KELOX-ULTRAX U 18 578376 165.66 U 20 578378 165.66 U 20 578380 165.66 U 32 578380 165.66 KE KELIT U 16 578374 165.66 KELOX-ULTRAX-W U 18 578376 165.66 U 20 578378 165.66 U 20 578380 165.66 U 20 578378 165.66 KE KELIT U 16 578376 165.66 U 20 578378 165.66 KE KELIT U 16 578378 165.66 U 20 578380 165.66 U 32 578380 165.66 U 32 578380 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 16 578374 165.66 KE KELIT U 18 578374 165.66 KE KELIT U 19 578378 165.66 U 20 578380 165.66 KE KELIT U 18 578374 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 236.66 KE KELIT U 19 578388 165.66 U 20 578380 165.66 U 20 578380 165.66 KE KELIT U 10 578374 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 KE KELIT U 10 578378 165.66 U 20 578380 165.66	NE NEL IT	U 40		578386	236,66
U 25	KELOX-ULTRAX	U 18		578376	165,66
U 32 578382 194,31					
KE KELIT U 16 578374 165.66 KELDX-ULTRAX-W U 18 578376 165.66 U 20 578378 165.66 U 20 578380 165.66 U 32 578380 194.31 U 40 578386 236.66 KE KELIT U 16 578374 165.66 KE LOX-WINDOX-U U 18 578374 165.66 U 20 578378 165.66 U 20 578378 165.66 KE KELIT U 16 578378 165.66 KE KELIT U 16 578378 165.66 KE KELIT U 19 578378 165.66 KE KELIT U 19 578386 236.66 KE KELIT U 10 578386 236.66 KE KELIT U 10 578386 236.66 KE KELIT U 10 578374 165.66 KE KELIT U 10 578376 165.66 KE KELIT U 10 578376 165.66 KE KELIT U 10 578376 165.66 KE KELIT U 10 578377 165.66 KE KELIT U 10 578377 165.66 KE KELIT U 10 578378 165.66 LU 20 578378 165.66 LU 20 578378 165.66		U 32		578382	194,31
U 20 578378 165.66 U 25 578380 165.66 U 25 578382 194.31 U 40 578386 236.66 KE KELIT U 16 578374 165.66 KELOX-WINDOX-U U 18 578376 165.66 U 20 578378 165.66 U 25 578380 165.66 U 25 578380 236.66 KE KELIT U 16 578378 165.66 KE KELIT U 17 16 578386 236.66 KE KELIT U 18 578386 236.66 KE KELIT U 18 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578376 165.66 KE KELIT U 19 578376 165.66 KE KELIT U 19 578376 165.66 U 20 578378 165.66 U 20 578378 165.66	KE KELIT	U 16		578374	165,66
U 25 578380 15.566 U 32 578380 19.5.66 U 32 578386 23.6.66 KE KELIT U 16 578374 165.66 KE LOX-WINDOX-U U 18 578378 165.66 U 25 578380 165.66 U 25 578380 165.66 U 25 578380 165.66 KE KELIT U 16 578378 165.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578386 236.66 KE KELIT U 19 578374 165.66 KE KELIT U 19 578374 165.66 KE KELIT U 18 578374 165.66 U 20 578378 165.66 U 20 578378 165.66 U 25 578380 165.66	KELUX-ULIKAX-W				
U 40		U 25		578380	165,66
KELOX-WINDOX-U U 18 578376 165.66 U 20 578378 165.66 U 25 578380 165.66 U 32 578382 194.31 U 40 578386 236.66 KE KELIT U 16 578374 165.66 KELOX-WINDOX-W U 18 578376 165.66 U 20 578378 165.66 U 25 578380 165.66 U 32 578382 194.31	VE VEL 17	U 40		578386	236,66
U 20 578378 165.66 U 25 578380 165.66 U 32 578382 194.31 U 40 578386 236.66 KE KELIT U 16 578374 165.66 KELOX-WINDOX-W U 18 578376 165.66 U 20 578378 165.66 U 25 578380 165.66 U 32 578382 194.31	KE KELIT Kelox-windox-u				
U 32 578382 194,31 U 40 578386 236,66 KE KELIT U 16 578374 155,66 KELOX-WINDOX-W U 18 578376 165,66 U 20 578378 165,66 U 25 578380 165,66 U 25 578380 165,66 U 32 578382 194,31		U 20		578378	165,66
KE KELIT U 16 578374 165,66 KELDX-WINDDX-W U 18 578376 165,66 U 20 578378 165,66 U 25 578380 165,66 U 32 578382 194,31		U 32		578382	194,31
KELOX-WINDOX-W U 18 578376 165,66 U 20 578378 165,66 U 25 578380 165,66 U 25 578380 165,66 U 29 578382 194,31	KE KELIT				
U 25 578380 165,66 U 32 578382 194,31	KELOX-WINDOX-W	U 18		578376	165,66
		U 25		578380	165,66

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	
KE KELIT	M 15		578312	146,
steelFIX C-Stahl	M 18 M 22		578314 578316	146, 146,
o tunt	M 28		578318	146,
	M 35		578390	178,
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124, 124,
	M 22 S (PR-2B)	Mini Z8	574740 R	124,
	M 28 S (PR-2B)	Mini Z8	574744 R	124,
/F /F T	M 35 S (PR-2B)	Mini Z8	574746 R	136,
(E KELIT steelFIX	M 15 M 18		578312 578314	146, 146,
delstahl	M 22		578316	146,
	M 28		578318	146,
	M 35 M 15 S (PR-2B)	Mini 78	578390 574738 R	178, 124,
	M 18 S (PR-2B)	Mini Z8	574740 R	124,
	M 22 S (PR-2B)	Mini Z8	574742 R	124,
	M 28 S (PR-2B)	Mini Z8	574744 R	124,
(EMBLA	M 35 S (PR-2B) VAU 15 (OD 12,7 mm)	Mini Z8	574746 R 578630	136, 151,
(emPress	VAU 20 (OD 19,1 mm)		578632	151,
AUS)	VAU 25 (OD 25,4 mm)		578634	151,
(EMBLA	VAU 32 (OD 31,8 mm) VAU 15 (OD 12.7 mm)		578636 578630	159,1 151,1
KEMBLA KemPress Gas	VAU 20 (OD 19,1 mm)		578632	151,
AUS)	VAU 25 (OD 25,4 mm)		578634	151,
(10.11)	VAU 32 (OD 31,8 mm)		578636	159,
(ISAN (isan KD	KI 16 KI 20		578524 578526	187,: 187,:
	KI 25		578528	187,
	TH 16		578352 R	177,
	TH 20		578358 R	177, 177
	TH 25 TH 16 S (PR-2B)**	Mini Z8	578360 574782 R	177, 124.
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,
IISAN Iisan WL	KI 16		578524	187, 187,
(ISdII WL	KI 20 KI 25		578526 578528	187,
	KI 32		578530	252,4
	TH 16		578352 R	177,
	TH 20 TH 25		578358 R 578360	177,I 177,I
	TH 32		578364	177,
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,
	TH 25 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574792 R 574798 R	124, 136,
(ISAN	KI 16	Pilli 20	578524	187.
(isan WM	KI 20		578526	187,
	KI 25 KI 32		578528 578530	187,: 252,
(ISAN	U 20		578378	165,
(isan WR	U 25		578380	165,
	U 32		578382	194,
	U 40 TH 20		578386 578358 R	236,0 177,0
	TH 25		578360	177,
	TH 32		578364	177,
	TH 40	Mini 70	578624 574788 R	234,
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574792 R	124, 124,
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,
(ISAN	M 15		578312	146,
(istal C	M 18 M 22		578314	146,
	M 28		578316 578318	146, 146,
	М 35		578390	178,
	M 15 S (PR-2B)	Mini Z8	574738 R	124,
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124, 124,
	M 28 S (PR-2B)	Mini Z8	574744 R	124,
	M 35 S (PR-2B)	Mini Z8	574746 R	136,
(ISAN	M 15		578312 578314	146,
listal Inox	M 18 M 22		578314 578316	146, 146,
	M 28		578318	146,
	M 35		578390	178,
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8	574738 R	124,
	M 18 5 (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124, 124,
	M 28 S (PR-2B)	Mini Z8	574744 R	124,
	M 35 S (PR-2B)	Mini Z8	574746 R	136,
FORUM PAGE	WIO VIII (CT - T -)	L	ppar / ·	2=:
EGEND-PRESS ress fitting	VUS ½" (OD 15,9 mm) VUS ¾" (OD 22,2 mm)		578566 578568	177, 177,
ystem	VUS 1" (OD 28,6 mm)		578570	177,
,	VUS 1¼" (OD 34,9 mm)		578606	177,
K Systems	V 12		578324	146,
K >B <press< td=""><td>V 15</td><td></td><td>578328</td><td>146,</td></press<>	V 15		578328	146,
	V 18 V 22		578332 578334	146, 146,
	V 28		578336	146,
	V 35		578604	178,
	V 12 S (PR-2B)	Mini Z8	574748 R	124,
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124, 124,
	V 22 S (PR-2B)	Mini Z8	574758 R	124,
	V ZZ J (F IX-ZD)			
	V 28 S (PR-2B)	Mini Z8	574760 R	124

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
LK Systems	V 12		578324	146,98	Meier Tobler Metalplast – Stramax	H 16 H 20		578400 578406	159,75 159,75
LK >B <press Elförzinkat</press 	V 15 V 18		578328 578332	146,98 146,98	Serie MM	H 25		578408	159,75
EttorEllikut	V 22		578334	146,98		H 32		578412	159,75
	V 28		578336	146,98		RFz 16 RFz 20		578492	184,45
	V 35		578604	178,12		RFz 25		578494 578496	184,45 184,45
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51		RFz 32		578498	184,45
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51		TH 16		578352 R	177,08
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51		TH 20 TH 25		578358 R 578360	177,08 177,08
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51		TH 32		578364	177,00
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96		TH 40		578624	234,69
LK Systems	V 15		578328	146,98		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
LK >B <press< td=""><td>V 18</td><td></td><td>578332</td><td>146,98</td><td></td><td>TH 20 S (PR-2B)** TH 25 S (PR-2B)**</td><td>Mini Z8 Mini Z8</td><td>574788 R 574792 R</td><td>124,51 124,51</td></press<>	V 18		578332	146,98		TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574792 R	124,51 124,51
Gas	V 22		578334	146,98		TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	V 28 V 35		578336 578604	146,98 178,12		U 16		578374	165,66
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51		U 20 U 25		578378 578380	165,66 165,66
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51		U 32		578382	194,31
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51		U 40		578386	236,66
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51	METALGRUP	U 16 U 18		578374 578376	165,66
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96	Permatubo	U 20		578378	165,66 165,66
LK Systems LK Universal	TH 16 TH 20		578352 R 578358 R	177,08 177,08		U 25		578380	165,66
LK Ulliversat	TH 25		578360	177,08		U 32		578382	194,31
	TH 32		578364	177,08	METALGRUP	U 40 RFz 16		578386 578492	236,66 184,45
	TH 40		578624	234,69	PexGrup	RFz 20		578494	184,45
					·	RFz 25		578496	184,45
		M			METALGRUP	RFz 32		578498 578374	184,45
MAINCOR	U 16		578374	165,66	MultiGrup	U 16 U 18		578374 578376	165,66 165,66
MAINPRESS	U 20		578378	165,66		U 20		578378	165,66
	U 25		578380	165,66		U 25		578380	165,66
	U 32		578382	194,31	Mueller Streamline	U 32 VUS ½" (OD 15,9 mm)		578382 578566	194,31 177,50
	U 40		578386	236,66	PRS Copper Press	VUS ¾" (OD 22,2 mm)		578568	177,50
MAINCOR	U 16		578374	165,66		VUS 1" (OD 28,6 mm)		578570	177,50
MAINFLOR Mair Heiztechnik	U 20 H 11,5		578378 578394	165,66 159,75	MULTITHERM	VUS 1¼" (OD 34,9 mm) TH 16		578606 578352 R	177,50 177,08
M-Press	TH 16		578352 R	177,08	PRESSSYSTEM	TH 20		578358 R	177,00
	TH 20		578358 R	177,08		TH 26		578362 R	177,08
	TH 26		578362 R	177,08		TH 32 TH 40		578364 578624	177,08 234,69
	TH 32		578364	177,08		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51	Multicapas Industrial	RFz 16	MIIII ZO	578492	136,96 184,45
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96	AIS PEX	RFz 20		578494	184,45
Ma.s.ter System	TH 14		578348	177,08		RFz 25		578496	184,45
PRESSMASTER	TH 16		578352 R	177,08		RFz 32 U 16		578498 578374	184,45 165,66
	TH 18 TH 20		578356 578358 R	177,08 177,08		U 20		578378	165,66
	TH 25		578360	177,08		U 25		578380	165,66
	TH 26		578362 R	177,08	Multicapas Industrial	U 32		578382 578400	194,31 159,75
	TH 32		578364	177,08	AIS XPRT	H 20		578406	159,75
	TH 40		578624	234,69		H 25		578408	159,75
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51		H 26		578410	159,75
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574786 R	124,51 124,51		H 32 RFz 16		578412 578492	159,75 184,45
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51		RFz 20		578494	184,45
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51		RFz 25		578496	184,45
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51		RFz 32 TH 16		578498 578352 R	184,45 177,08
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96		TH 20		578358 R	177,08
	H 14		578398	159,75		TH 25		578360	177,08
	H 16 H 18		578400 578404	159,75 159,75		TH 26		578362 R	177,08
	H 20		578406	159,75		TH 32 TH 40		578364 578624	177,08 234,69
	H 26		578410	159,75		TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	H 32		578412	159,75		TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	U 14		578372	174,38		TH 25 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574792 R 574794 R	124,51 124,51
	U 16		578374	165,66		TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 18 U 20		578376 578378	165,66 165,66		U 16	•	578374	165,66
			578378 578380	165,66		U 20 U 25		578378 578380	165,66 165,66
									ነስስ ሰሰ
	U 25 U 32		578382	194,31		U 32		578382	194,31

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

REMS pressing tongs Mini REMS pressing rings

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Multicapas Industrial nultitubo systems MC	U 16		578374 578376	165,66 165,66
nattitubo systems ino	U 20		578378	165,66
	U 25		578380	165,66
	U 32 U 40		578382 578386	194,31 236,66
Aulticapas Industrial			578400	159,75
nultitubo systems MM			578406	159,75
	H 25 H 26		578408 578410	159,75 159,75
	H 32		578412	159,75
	RFz 16		578492	184,45
	RFz 20 RFz 25		578494 578496	184,45 184,45
	RFz 32		578498	184,45
	TH 16		578352 R	177,08
	TH 20 TH 25		578358 R 578360	177,08
	TH 26		578362 R	177,08 177,08
	TH 32		578364	177,08
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51 124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66
	U 20		578378	165,66
	U 25		578380	165,66
	U 32 U 40		578382 578386	194,31
nultipipe Deutschland			578352 R	236,66 177,08
rultipipe mp	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 40		578364 578624	177,08 234.69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,51 136,96
	111 32 3 (F K-20)		374770 K	130,70
		N		
EU <u>therm</u> Iekupress-ht	H 16 H 20		578400 578406	159,75 159,75
ILKUF KLJJ-III	H 26		578410	159,75
	H 32		578412	159,75
IBCO	VUS ½" (OD 15,9 mm)		578566	177,50
ress System opper	VUS ¾" (OD 22,2 mm) VUS 1" (OD 28,6 mm)		578568 578570	177,50 177,50
оррег	VUS 1¼" (OD 34,9 mm)		578606	177,50
IICOLL FLUXO	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 25 TH 26		578360 578362 R	177,08 177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
UPI Industrie aliane	B 16 B 18		578468 578470	193,28
lultinupi	B 20		578472	193,28 193,28
.a.c.	B 26		578474	213,00
	B 32		578476	213,00
	F 16 F 18		578456 578458	168,68 168,68
	F 20		578460	168,68
	F 26		578462	182,48
	F 32	Mini Z8	578464 574728 B	182,48
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Mini Z8 Mini Z8	574728 R 574730 R	124,51 124,51
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,51
	F 32 S (PR-2B)	Mini Z8	574734 R	136,96
	H 16 H 18		578400 578404	159,75 159,75
	H 20		578406	159,75
	H 25		578408	159,75
	H 26		578410	159,75
	H 32 TH 16		578412 578352 R	159,75 177,08
	TH 18		578356	177,08
	TH 20		578358 R	177,08
	TH 25 TH 26		578360 578362 R	177,08 177,08
	TH 32		578362 K 578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 14		578372	174,38
	U 16 U 18		578374 578374	165,66 165,66
	U 20		578376 578378	165,66 165,66
	U 25		578380	165,66
	U 26 ⁷⁾		578392	194,31
	U 32		578382 578384	194,31
ussbaum	U 40 VMP 3/8" (OD 17,2 mm)		578386 578660	236,66
accountil			578666 R	204,17
ptifitt-Press	VMP ½" G (OD 21,3 mm)		37000011	204,17

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Nussbaum Ontiflex Flowerses	VRX 16 VRX 20		578640 578642	186,42 186,42
Optiflex-Flowpress	VRX 25		578644	204,17
N	VRX 32		578646	204,17
Nussbaum Optipress	V 15 V 18		578328 578332	146,98 146,98
Aquaplus	V 22		578334	146,98
	V 28 V 35		578336 578604	146,98 178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124.51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
Nussbaum Ontingon Goz	V 15 V 18		578328 578332	146,98 146,98
Optipress Gaz	V 22		578334	146,76
	V 28		578336	146,98
	V 35 V 15 S (PR-2B)	Mini Z8	578604 574752 R	178,12 124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
Nussbaum	V 15		578328	146,98
Optipress-Therm	V 18 V 22		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35	M:=: 70	578604	178,12
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
	¥ 33 3 (1 K 2D)	0	374702 K	130,70
Oventro-	U 14 A	9	E70/00	00/45
Oventrop Cofit P	H 16 A H 20 A		578420 578426	204,17 204,17
	H 26 A		578430	204,17
Oventrop	H 32 A H 16 A		578432 578420	204,17 204,17
Cofit PD	H 20 A		578426	204,17
0	H 26 A		578430	204,17
Oventrop Cofit PDK	H 16 A H 20 A		578420 578426	204,17 204,17
Oventrop	H 16 A		578420	204,17
Cofit PD-HT	H 20 A H 32 A		578426 578432	204,17 204,17
Oventrop	H 16 A		578420	204,17
Cofit PDK-HT	H 20 A	_	578426	204,17
		Р		
PBTub SERTIPRESS	RFz 12 RFz 16		578490 578492	184,45 184,45
	RFz 20		578494	184,45
PBTub	RFz 25 M 15		578496 578312	184,45 146,98
SERTI-STEEL ¹⁾	M 18		578314	146,98
	M 22		578316	146,98
	M 28 M 15 S (PR-2B)	Mini Z8	578318 574738 R	146,98 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
Pegler Yorkshire	> Aalberts integrated piping sys	stems		
PERFEXIM	U 16		578374	165,66
PERFEKT SYSTEM	U 20 U 25		578378 578380	165,66 165,66
	U 32		578382	194,31
PERFEXIM PERFEKT	U 16 U 20		578374 578378	165,66 165,66
SYSTEM PLUS	U 25		578380	165,66
	U 32		578382	194,31
	TH 16 TH 20		578352 R 578358 R	177,08 177,08
	TH 25		578360	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
PERFILTUBO	TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66
PERFILALUPEX	U 18		578376	165,66
	U 20		578378 578380	165,66
	U 25 U 32		578380 578382	165,66 194,31
	U 40		578386	236,66
PERFILTUBO Perfilpress	M 15 M 18		578312 578314	146,98 146,98
. EM IEI NEGO	M 22		578316	146,76
	M 28		578318	146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
	RFz 16		578492	184,45
PEXTUBE				
PEXTUBE PexTube	RFz 20 RFz 25		578494 578496	184,45 184,45

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Pipelife C-PRESS	M 15 M 18		578312 578314	146,98 146,98
C I KLOO	M 22		578316	146,78
	M 28		578318	146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
Pipelife	TH 16	MIIII 20	578352 R	177,08
RADOPRESS	TH 18		578356	177,08
	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 32		578364	177,08
	TH 40	W: : 70	578624	234,69
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574786 R	124,51 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
Pipetec Connect	TH 32 S (PR-2B) TH 16	Mini Z8	574798 R 578352 R	136,96 177,08
r ipetec connect	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 40		578364 578624	177,08 234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,51 136.96
	U 16	MIIII ZU	578374	165,66
	U 20		578378	165,66
PLASTICA ALFA	U 32 TH 16		578382 578352 R	194,31 177,08
Multypex	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
PLASTICA ALFA	TH 32 S (PR-2B) TH 16	Mini Z8	574798 R 578352 R	136,96 177,08
Multypex Air	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
PLASTICA ALFA	TH 32 S (PR-2B) TH 16	Mini Z8	574798 R 578352 R	136,96 177,08
Multypexalfa Gas	TH 20		578358 R	177,08
	TH 26	W:-: 70	578362 R	177,08
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124.51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
PLASTICA ALFA	TH 16 TH 20		578352 R	177,08
Multypexalfa Gas protek	TH 26		578358 R 578362 R	177,08 177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
PLASTICA ALFA	TH 26 S (PR-2B)** TH 16	Mini Z8	574794 R 578352 R	124,51 177,08
Multypex Plus	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
PLASTICA ALFA	TH 32 S (PR-2B) TH 16	Mini Z8	574798 R 578352 R	136,96 177,08
Multypex Thermo	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
PLASTICA ALFA	TH 32 S (PR-2B) TH 16	Mini Z8	574798 R 578352 R	136,96 177,08
Multypex Thermo Plus	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
PLÁSTICOS FERRO	U 16		578374	165,66
FERROPLAST GPF MULT Pressfitting	U 20 II 25		578378 578380	165,66 165,66
MULTICAPA	U 32		578382	194,31
PLÁSTICOS FERRO	U 16		578374	165,66
FERROPLAST	U 20		578378	165,66
GPF PPSU	U 25		578380	165,66
Pressfitting PEX y MULTICAPA	U 32		578382	194,31
PLÁSTICOS FERRO	RFz 16		578492	184,45 184.45
FERROPLAST GPF PRESS	RFz 20 RFz 25		578494 578496	184,45
Pressfitting PEX	RFz 32		578498	184,45
PLUMBING PLUS	K16/P18		578592	184,45
EZIPEX Crimp	K/20		578594	184,45
(AUS)	K/25 K32		578596 578598	184,45 184,45
	K1/40		578600	184,45
PLUMBING PLUS	K16/P18		578592	184,45
EZIPEX Gas	K/20		578594	184,45
(AUS)	K/25		578596	184,45
	K32 K1/40		578598 578400	184,45
PLUMBING PLUS	Yz 16 UNI		578600 578740	184,45 184,45
UNIPEX	Yz 20 UNI		578742	184,45
Water & Gas (AUS)	Yz 25 UNI		578744	184,45
	Yz 32 UNI		578746	184,45
PLUMBING PLUS EZIPRESS Gas	VAU 15 (OD 12,7 mm)		578630 578632	151,86
(AUS)	VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm)		578634	151,86 151,86
(NOO)	VAU 32 (OD 31,8 mm)		578636	159,75
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	124,51
	VAU 20 S (PR-2B)** (0D 19,1 mm)	Mini Z8	574806 R	124,51
DI HADING DI HG	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	136,96
PLUMBING PLUS EZIPRESS Solar	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm)		578630 578632	151,86 151,86
(AUS)	VAU 25 (OD 25,4 mm)		578634	151,86
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	124,51
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	124,51
DI HMDING DI HG	VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8	574808 R	136,96
PLUMBING PLUS EZIPRESS Water	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm)		578630 578632	151,86 151,86
(AUS)	VAU 25 (OD 25,4 mm)		578634	151,86
	VAU 32 (OD 31,8 mm)		578636	159,75
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	124,51
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Mini Z8	574806 R	124,51
POLYPIPE	VAU 25 S (PR-2B)** (OD 25,4 mm) TH 10	Mini Z8	574808 R 578342	136,96 177,08
POLYSURE	TH 15		578350	177,08
	TH 22		578588	177,08
	TH 28		578590	177,08
POLYSAN	M 15		578312	146,98
Handelsges. m.b.H. & Co KG	M 18 M 22		578314 578316	146,98 146,98
(Krems/Öster-	M 28		578318	146,78
reich)	M 35		578390	178,12
POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
C Stahl-Press-	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
System M	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574744 R	136,96
POLYSAN	M 15		578312	146,98
Handelsges.	M 18		578314	146,98
m.b.H. & Co KG	M 22		578316	146,98
(Krems/Öster- reich)	M 28 M 35		578318 578390	146,98 178,12
POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
Edelstahl	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
Press-System	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
1.4520	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
POLYSAN	M 35 S (PR-2B)	Mini Z8	574746 R 578312	136,96
PULYSAN Handelsges.	M 15 M 18		578312 578314	146,98 146,98
m.b.H. & Co KG	M 22		578316	146,78
(Krems/Öster-	M 28		578318	146,98
reich)	M 35		578390	178,12
POLYSAN-	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
Edelstahl Press-System Gas	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
0,516111 003	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	€
POLYSAN Handelsges.	M 15 M 18		578312 578314	146,98 146,98
m.b.H. & Co KG (Krems/Öster-	M 22		578316	146,98
reich)	M 28 M 35		578318 578390	146,98 178,12
POLYSAN- Edelstahl	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
Press-System Wasser	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
POLYSAN Handelsges.	TH 14 TH 16		578348 578352 R	177,08 177,08
m.b.H. & Co KG (Krems/Öster-	TH 17 TH 18		578354 578356	177,08 177,08
reich)	TH 20		578358 R	177,08
POLYSAN- Press-System	TH 26 TH 32		578362 R 578364	177,08 177,08
	TH 40 TH 14 S (PR-2B)**	Mini Z8	578624 574778 R	234,69 124,51
	TH 16 S (PR-2B)** TH 17 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574784 R	124,51 124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
POLYSAN	TH 32 S (PR-2B) TH 14	Mini Z8	574798 R 578348	136,96 177,08
Handelsges.	TH 16		578352 R	177,08
m.b.H. & Co KG (Krems/Öster-	TH 17 TH 18		578354 578356	177,08 177,08
reich) POLYSAN-Henco-	TH 20 TH 26		578358 R 578362 R	177,08 177,08
Press-System	HE 32 HEz 40 ³⁾		578370 R 578572	212,06 307,66
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)** TH 17 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574784 R	124,51 124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574786 R 574788 R	124,51 124,51
Parison (5 2)	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
POLYSAN (España) "Rainbow"	U 16 U 18		578374 578376	165,66 165,66
	U 20 U 25		578378 578380	165,66 165,66
	U 32		578382	194,31
Prandelli	U 40 H 14		578386 578398	236,66 159,75
Multyrama Pf	H 16 H 18		578400 578404	159,75 159,75
	H 20 H 26		578406 578410	159,75 159,75
	H 32		578412	159,75
Prandelli	U 40 H 16		578386 578400	236,66 159,75
Multyrama Pfm	H 18 H 20		578404 578406	159,75 159,75
	H 26		578410	159,75
	H 32 TH 16		578412 578352 R	159,75 177,08
	TH 18 TH 20		578356 578358 R	177,08 177,08
	TH 26 TH 32		578362 R 578364	177,08 177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574786 R	124,51 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16 U 18		578374 578376	165,66 165,66
	U 20 U 40		578378 578386	165,66 236,66
PURMO Cleverfit Radial	F 16 F 20		578456 578460	168,68 168,68
Clevelli Raulai	F 26		578462	182,48
	F 32 F 16 S (PR-2B)**	Mini Z8	578464 574728 R	182,48 124,51
	F 20 S (PR-2B)** F 26 S (PR-2B)**	Mini Z8 Mini Z8	574730 R 574732 R	124,51 124,51
	F 32 S (PR-2B)	Mini Z8	574734 R	136,96
	H 16 H 20		578400 578406	159,75 159,75
	H 26 H 32		578410 578412	159,75 159,75
	TH 14		578348	177,08
	TH 16 TH 17		578352 R 578354	177,08 177,08
	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 32 TH 40		578364 578624	177,08 234,69
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)** TH 17 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574784 R	124,51 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16 U 20		578374 578378	165,66 165,66
	U 32		578382	194,31
	VP 16		578482	176,56

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
		R		
Raccorderie	M 15		578312	146,98
Metalliche	M 18		578314	146,98
aesPRES ¹⁾	M 22 M 28		578316 578318	146,98 146,98
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
D	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
Raccorderie Metalliche	M 15 M 18		578312 578314	146,98 146,98
inoxPRES ¹⁾	M 22		578316	146,98
	M 28		578318	146,98
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8 Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8	574742 R 574744 R	124,51 124.51
	M 35 S (PR-2B)	Mini Z8	574744 R	136,96
Raccorderie	M 15		578312	146,98
Metalliche	M 18		578314	146,98
MARINEPRES ¹⁾	M 22		578316	146,98
	M 28		578318	146,98
	M 35	W: : 70	578390	178,12
	M 15 S (PR-2B)	Mini Z8 Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
Raccorderie	M 15		578312	146,98
Metalliche	M 18		578314	146,98
steelPRES ¹⁾	M 22		578316	146,98
	M 28 M 35		578318	146,98
	м 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
RBM Tita-fix	B 14		578466	193,28
	B 16		578468	193,28
	B 18 B 20		578470 578472	193,28 193,28
	B 26		578474	213,00
	F 16		578456	168,68
	F 18		578458	168,68
	F 20		578460	168,68
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,51
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,51
	H 14 H 16		578398 578400	159,75 159,75
	H 18		578404	159,75
	H 20		578406	159,75
	H 26		578410	159,75
	H 32		578412	159,75
	TH 14		578348	177,08
	TH 16		578352 R	177,08
	TH 18 TH 20		578356 578358 R	177,08 177,08
	TH 26		578362 R	177,00
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B) U 14	Mini Z8	574798 R 578372	136,96
	U 16		578374	174,38 165,66
	U 18		578376	165,66
	U 20		578378	165,66
RBM Tita-gas	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32	N:=: 70	578364	177,08
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
Redi Nicoll Fluxo	TH 14	**** ==	578348	177,08
	TH 16		578352 R	177,08
	TH 18		578356	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40 TH 14 S (PR-2R)**	Mini 70	578624 574782 R	234,69
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574786 R 574794 R	124,51

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Redi Nicoll Fluxo	TH 16		578352 R	177,08
Gas	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
RIFENG LD	LD 16		578652	182,69
PRESS FITTING (F8)	LD 20 LD 25		578654 578656	182,69 182,69
RIFENG U	U 14		578372	174,38
PRESS FITTING	U 16		578374	165,66
(F5)	U 18		578376	165,66
	U 20		578378	165,66
	U 25 U 32		578380 578382	165,66 194,31
	U 40		578386	236,66
RIFENG TH	TH 16		578352 R	177,08
PRESS FITTING	TH 20		578358 R	177,08
(F9)	TH 25		578360	177,08
	TH 26 TH 32		578362 R 578364	177,08
	TH 40		578624	177,08 234,69
RIQUIER	RFz 12		578490	184,45
A SERTIR	RFz 16		578492	184,45
	RFz 20		578494	184,45
DIQUIED	RFz 25 TH 16		578496	184,45
RIQUIER Système multicouche			578352 R 578358 R	177,08 177,08
Systeme matticoache	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Mini Z8	574774 R 574798 R	136,96
	U 16	===	578374	165,66
	U 20		578378	165,66
	U 32		578382	194,31
Roth PressCheck	U 40 RN 14		578386 578434	236,66 165,66
NULII F 1635CIICCK	RN 16		578454	165,66
	RN 17		578436	165,66
	RN 20		578438	165,66
	RN 25/26		578440	165,66
Rubinetterie	RN 32 M 15		578442 578312	194,31 146,98
Bresciane	M 18		578314	146,78
Bonomi	M 22		578316	146,98
TURBO CuNi	M 28		578318	146,98
	M 35		578390	178,12
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
Rubinetterie	M 15		578312	146,98
Bresciane	M 18		578314	146,98
Bonomi TURBO INOX	M 22 M 28		578316 578318	146,98 146,98
TORBUTNOX	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
			574740 R	124,51
	M 18 S (PR-2B)	Mini Z8		,
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
Ruhinetterie	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8	574742 R 574744 R 574746 R	124,51 124,51 136,96
Rubinetterie Bresciane	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
Bresciane	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 15	Mini Z8 Mini Z8	574742 R 574744 R 574746 R 578312	124,51 124,51 136,96 146,98
Bresciane Bonomi	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 15 M 18 M 22 M 28	Mini Z8 Mini Z8	574742 R 574744 R 574746 R 578312 578314 578316 578318	124,51 124,51 136,96 146,98 146,98 146,98
Rubinetterie Bresciane Bonomi TURBO INOX GAS	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 15 M 18 M 22 M 28 M 35	Mini Z8 Mini Z8 Mini Z8	574742 R 574744 R 574746 R 578312 578314 578316 578318 578390	124,51 124,51 136,96 146,98 146,98 146,98 178,12
Bresciane Bonomi	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8	574742 R 574744 R 574746 R 578312 578314 578316 578318 578390 574738 R	124,51 124,51 136,96 146,98 146,98 146,98 178,12 124,51
Bresciane Bonomi	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 15 M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	574742 R 574744 R 574746 R 578312 578314 578316 578318 578390 574738 R 574740 R	124,51 124,51 136,96 146,98 146,98 146,98 178,12 124,51 124,51
Bresciane Bonomi	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 15 M 18 M 22 M 28 M 35 M 15 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8	574742 R 574744 R 574746 R 578312 578314 578316 578318 578390 574738 R	124,51 124,51 136,96 146,98 146,98 146,98 178,12 124,51

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Rubinetterie	M 15		578312	146,98
Bresciane	M 18 M 22		578314	146,98
Bonomi TURBO STEEL	M 28		578316 578318	146,98 146,98
TORDO STELL	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
Rubinetterie	B 14		578466	193,28
Bresciane	B 16		578468 578470	193,28
Bonomi TURBO PRESS	B 18 B 20		578470 578472	193,28 193,28
TORDOTRESS	B 26		578474	213,00
	B 32		578476	213,00
	H 14		578398	159,75
	H 16		578400	159,75
	H 18		578404	159,75
	H 20		578406	159,75
	H 26		578410	159,75
	H 32		578412	159,75
	TH 14		578348	177,08
	TH 16 TH 18		578352 R 578356	177,08 177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 14		578372	174,38
	U 16 U 18		578374 578376	165,66 165,66
	U 20		578378	165,66
	U 26 ⁷⁾		578392	194,31
	U 32		578382	194,31
Rubinetterie	TH 16		578352 R	177,08
Bresciane	TH 20		578358 R	177,08
Bonomi	TH 26		578362 R	177,08
TURBO PRESS	TH 32		578364	177,08
GAS	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	111 02 0 (1 N 20)	S	074770 K	100,70
CA MI DI ACTIC	TII 1/	.	E702/0	177.00
SA.MI PLASTIC	TH 14 TH 16		578348 578352 R	177,08 177,08
	TH 18		578354 578356	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8 Mini Z8	574794 R 574798 R	124,51
SA.MI PLASTIC	TH 16	Pinn ZU	578352 R	177,08
Multistrato Gas	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	IN 10 3 (FR-ZD)			
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

ystem	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	•
ANHA	B 16		578468	193,2
fit-Press Pb-free	B 20		578472	193,2
erie 25000	B 26		578474	213,0
	B 32 F 16		578476 578456	213,0 168,6
	F 20		578460	168,6
	F 26		578462	182,4
	F 32		578464	182,4
	Fz 40		578478	247,1
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,5
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,5
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,5
	F 32 S (PR-2B)	Mini Z8	574734 R	136,9
	H 16		578400	159,7
	H 20		578406	159,7
	H 26		578410	159,7
	H 32 TH 16		578412	159,7
	TH 20		578352 R 578358 R	177,0 177,0
	TH 26		578362 R	177,0
	TH 32		578364	177,0
	TH 40		578624	234,6
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,9
	U 16		578374	165,6
	U 20		578378	165,6
	U 26 ⁷⁾		578392	194,3
	U 32		578382	194,3
	U 40		578386	236,6
ANHA	B 16		578468	193,2
fit-Press PPSU	B 20		578472	193,2
erie 35000	B 26		578474	213,0
	B 32		578476	213,0
	F 16 F 20		578456	168,6
	F 26		578460 578462	168,6
	F 32		578464	182,4 182,4
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,5
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,5
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,5
	F 32 S (PR-2B)	Mini Z8	574734 R	136,9
	H 16		578400	159,7
	H 20		578406	159,7
	H 26		578410	159,7
	H 32		578412	159,7
	TH 16		578352 R	177,0
	TH 20		578358 R	177,0
	TH 26		578362 R	177,0
	TH 32		578364	177,0
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Mini Z8	574794 R	124,5
	U 16	Mini Z8	574798 R 578374	136,9 165,6
	U 20		578378	165,6
	U 26 ⁷⁾		578392	194,3
	U 32		578382	194,3
ANHA	VMP ½" G (OD 21,3 mm)		578666 R	204,1
eavy Steel Press	VMPz 3/4" (OD 26,9 mm)		578664	204,1
ANHA	VMP 1/2" G (OD 21,3 mm)6)		578666 R	204,1
avy Steel Press Gas	VMPz ¾" (OD 26,9 mm)		578664	204,1
NHA-NiroSan	SA 15		578514	176,5
as Presssystem	SA 18		578518	176,5
erie 17000	SA 22 SA 28		578520 578522	176,5
	M 15 ¹⁾		578522 578312	176,5 146,9
	10		578314	146,7
	M 18 ¹⁾			140,7
	M 18 ¹⁾ M 22 ¹⁾		3/03/0	146.9
	M 18 ¹⁾ M 22 ¹⁾ M 28		578316 578318	
	M 22 1)			146,9
	M 22 ¹⁾ M 28	Mini Z8	578318	146,9 178,1
	M 22 ¹⁾ M 28 M 35	Mini Z8 Mini Z8	578318 578390	146,9 178,1 124,5
	M 22 ¹⁾ M 28 M 35 M 15 S (PR-2B)		578318 578390 574738 R	146,9 178,1 124,5 124,5
	M 22" M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R	146,9 178,1 124,5 124,5 124,5
	M 22" M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R	146,9 178,1 124,5 124,5 124,5 124,5 136,9
	M 22 " M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 29 S (PR-2B) M 35 S (PR-2B) V 15 "	Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328	146,9 178,1 124,5 124,5 124,5 124,5 136,9 146,9
	M 22 "1 M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 "1 V 18 "1	Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578332	146,9 178,1 124,5 124,5 124,5 136,9 146,9
	M 22 " M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 " V 18 " V 22 "	Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578332 578334	146.9 178.1 124.5 124.5 124.5 124.5 136.9 146.9 146.9
	M 22 " M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 " V 18 " V 22 " V 28	Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578332 578334 578336	146,9 178,1 124,5 124,5 124,5 124,5 136,9 146,9 146,9 146,9
	M 22 " M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 " V 18 " V 22 " V 28 V 35	Mini Z8 Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578332 578334 578336 578604	146,9 178,1 124,5 124,5 124,5 124,5 136,9 146,9 146,9 146,9 178,1
	M 22 " M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 " V 18 " V 22 " V 28 V 35 V 15 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578332 578334 578334 578336 578604 574752 R	146,9 146,9 178,1 124,5 124,5 124,5 136,9 146,9 146,9 178,1 124,5
	M 22 " M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 " V 18 " V 22 " V 28 V 35 V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578332 578334 578336 578604 574752 R 574756 R	146,9 178,1 124,5 124,5 124,5 124,5 136,9 146,9 146,9 146,9 178,1 124,5
	M 22 " M 28 M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 " V 18 " V 22 " V 28 V 35 V 15 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578318 578390 574738 R 574740 R 574742 R 574744 R 574746 R 578328 578332 578334 578334 578336 578604 574752 R	146,9 178,1 124,5 124,5 124,5 124,5 136,9 146,9 146,9 146,9 178,1 124,5

System	Pressing tongs Mini /	Driven by	ArtNo.	€
SANHA-NiroSan	pressing rings SA 15	adapter tongs	578514	176.56
Industry	SA 18		578518	176,56
Presssystem Serie 18000	SA 22 SA 28		578520 578522	176,56 176,56
Selle 10000	M 15 ¹⁾		578312	146,98
	M 18 ¹⁾ M 22 ¹⁾		578314 578316	146,98 146,98
	M 28		578318	146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
	V 15 ¹⁾ V 18 ¹⁾		578328 578332	146,98 146,98
	V 22 1)		578334	146,98
	V 28 V 35		578336 578604	146,98 178,12
	V 15 S (PR-2B)	Mini Z8 Mini Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
SANHA-NiroSan-	SA 15	MIIII 20	578514	176,56
Presssystem Serie 9000	SA 18 SA 22		578518 578520	176,56 176,56
Serie 7000	SA 28		578522	176,56
	M 15 ¹⁾ M 18 ¹⁾		578312 578314	146,98 146,98
	M 22 ¹⁾		578316	146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B) V 15 ¹⁾	Mini Z8	574746 R 578328	136,96 146,98
	V 18 1)		578332	146,98
	V 22 ¹⁾ V 28		578334 578336	146,98 146,98
	V 35		578604	178,12
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
SANHA-NiroSan	SA 15		578514	176,56
SF Presssystem Serie 19000	SA 18 SA 22		578518 578520	176,56 176,56
(silicone free)	SA 28		578522	176,56
	M 15 ¹⁾ M 18 ¹⁾		578312 578314	146,98 146,98
	M 22 ¹⁾		578316	146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
	V 15 1)	MIII 20	578328	146,98
	V 18 ¹⁾ V 22 ¹⁾		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35 V 15 S (PR-2B)	Mini Z8	578604 574752 R	178,12 124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
SANHA NiroTherm	SA 15 SA 18		578514 578518	176,56 176,56
Serie 91000	SA 22		578520	176,56
	SA 28 M 15 ¹⁾		578522 578312	176,56 146,98
	M 18 ¹⁾		578314	146,98
	M 22 ¹⁾ M 28		578316 578318	146,98 146,98
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
	V 15 ¹⁾ V 18 ¹⁾		578328 578332	146,98 146,98
	V 22 1)		578334	146,98
	V 28 V 35		578336 578604	146,98 178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
SANHA	SA 15	, ,	578514	176,56	SANHA-Press	SA 12		578510	256,39
NiroTherm Industry	SA 18 SA 22		578518 578520	176,56 176,56	Pressfittings	SA 14		578512	256,39
Serie 98000	SA 28		578522	176,56	Serie 6000	SA 15		578514	176,56
	M 15 ¹⁾ M 18 ¹⁾		578312 578314	146,98 146,98		SA 16		578516	176,56
	M 22 ¹⁾		578316	146,78		SA 18		578518	176,56
	M 28		578318	146,98		SA 22		578520	176,56
	M 35 M 15 S (PR-2B)	Mini Z8	578390 574738 R	178,12 124,51		SA 28		578522	176,56
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		M 12		578310	146,98
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		M 15 ¹⁾		578312	146,98
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96		M 18 ¹⁾ M 22 ¹⁾		578314 578316	146,98
	V 15 ¹⁾	1-1111 EU	578328	146,98		M 28		578318	146,98 146,98
	V 18 ¹⁾		578332	146,98		м 26 М 35		578390	178,12
	V 22 ¹⁾ V 28		578334 578336	146,98 146,98		M 12 S (PR-2B)	Mini Z8	574736 R	124,51
	V 35		578604	178,12		M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124,51		M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	V 10 S (PR-2B) V 22 S (PR-2B)	Mini Z8	574758 R	124,51 124,51		M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51		M 28 S (PR-2B)	Mini Z8	574744 R	124,51
SANHA-Press	V 35 S (PR-2B)	Mini Z8	574762 R 578510	136,96 256,39		M 35 S (PR-2B)	Mini Z8	574746 R	136,96
Chrom	SA 12 SA 15		578514	236,39 176,56		V 12		578324	146,98
Serie 16000	SA 18		578518	176,56		V 14		578326	146,98
	SA 22 SA 28		578520 578522	176,56 176,56		VG 14		578338	146,98
	M 12		578310	146,98		V 15 1)		578328	146,98
	M 15 ¹⁾		578312	146,98		V 16		578330	146,98
	M 18 ¹⁾ M 22 ¹⁾		578314 578316	146,98 146,98		VG 16		578340	146,98
	M 28		578318	146,98		V 18 1)		578332	146,98
	M 12 S (PR-2B)	Mini Z8	574736 R	124,51		V 22 1)		578334	146,98
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51		V 28		578336	146,98
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51		V 35		578604	178,12
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51		V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 12 V 15 ¹⁾		578324 578328	146,98 146,98		VG 14 S (PR-2B)	Mini Z8	574750 R	124,51
	V 18 1)		578332	146,98		V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 22 ¹⁾		578334	146,98		VG 16 S (PR-2B)	Mini Z8	574754 R	124,51
	V 28 V 12 S (PR-2B)	Mini Z8	578336 574748 R	146,98 124,51		V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51		V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574756 R 574758 R	124,51 124,51		V 28 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51	SANHA-Press	V 35 S (PR-2B) SA 12	MIIII ZO	574702 K	256,39
SANHA-Press	SA 12		578510	256,39	SOLAR	SA 12		578514	176,56
GAS Pressfittings Serie 10000/	SA 14 SA 15		578512 578514	256,39 176,56	Pressfittings	SA 18		578518	176,56
Serie 11000	SA 16		578516	176,56	Serie 12000/	SA 22		578520	176,56
	SA 18		578518	176,56	Serie 13000	SA 28		578522	176,56
	SA 22 SA 28		578520 578522	176,56 176,56		M 12		578310	146,98
	M 12		578310	146,98		M 15 ¹⁾		578312	146,98
	M 15 ¹⁾		578312	146,98		M 18 ¹⁾		578314	146,98
	M 18 ¹⁾ M 22 ¹⁾		578314 578316	146,98 146,98		M 22 ¹⁾		578316	146,98
	M 28		578318	146,98		M 28		578318	146,98
	M 35	M:-: 70	578390	178,12		M 35		578390	178,12
	M 12 S (PR-2B) M 15 S (PR-2B)	Mini Z8 Mini Z8	574736 R 574738 R	124,51 124,51		M 12 S (PR-2B)	Mini Z8	574736 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51		M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Mini Z8 Mini Z8	574742 R 574744 R	124,51 124,51		M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96		M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	V 12		578324	146,98		M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	V 14 VG 14		578326 578338	146,98 146,98		M 35 S (PR-2B)	Mini Z8	574746 R	136,96
	V 15 1)		578328	146,98		V 12		578324	146,98
	V 16		578330	146,98		V 15 ¹⁾		578328	146,98
	VG 16 V 18 ¹⁾		578340 578332	146,98 146,98		V 18 ¹⁾		578332	146,98
	V 22 1)		578334	146,98		V 22 ¹⁾		578334	146,98
	V 28		578336	146,98		V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51		V 35	M:-: 70	578604	178,12
	VG 14 S (PR-2B)	Mini Z8	574750 R	124,51		V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51		V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	VG 16 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574754 R 574756 R	124,51 124,51		V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51		V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51		V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96		¥ JJ J (1"R-ZD)	rIIIII 40	J/4/02 K	130,70

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- 7) Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	€
SANHA	SA 12		578510	256,39
PURAPRESS Serie 8000	SA 14 SA 15		578512 578514	256,39 176,56
	SA 16		578516	176,56
	SA 18 SA 22		578518 578520	176,56 176,56
	SA 28		578522	176,56
	M 12 ¹⁾		578310	146,98
	M 15 ¹⁾ M 18 ¹⁾		578312 578314	146,98 146,98
	M 22 ¹⁾		578316	146,98
	M 28 ¹⁾		578318	146,98
	M 35 ¹⁾ M 12 S (PR-2B)	Mini Z8	578390 574736 R	178,12 124,51
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Mini Z8 Mini Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
	V 12 V 14		578324 578326	146,98 146,98
	VG 14		578338	146,98
	V 15 ¹⁾ V 16		578328	146,98
	V 10 VG 16		578330 578340	146,98 146,98
	V 18 ¹⁾		578332	146,98
	V 22 ¹⁾ V 28		578334 578336	146,98 146,98
	V 35		578604	178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	VG 14 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini Z8	574750 R 574752 R	124,51 124.51
	VG 16 S (PR-2B)	Mini Z8	574754 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
SANHA-Therm Serie 24000	SA 12 SA 15		578510 578514	256,39 176,56
24000	SA 18		578518	176,56
	SA 22		578520	176,56
	SA 28 M 12		578522 578310	176,56 146,98
	M 15 ¹⁾		578312	146,98
	M 18 ¹⁾ M 22 ¹⁾		578314	146,98
	M 28		578316 578318	146,98 146,98
	M 35		578390	178,12
	M 12 S (PR-2B) M 15 S (PR-2B)	Mini Z8 Mini Z8	574736 R 574738 R	124,51 124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8	574744 R 574746 R	124,51 136,96
	V 12	Film 20	578324	146,98
	V 15 ¹⁾		578328	146,98
	V 18 ¹⁾ V 22 ¹⁾		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604	178,12
	V 15 S (PR-2B)	Mini Z8	574748 R 574752 R	124,51 124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96
ANHA-Therm	SA 12		578510	256,39
ndustry Serie 28000	SA 15 SA 18		578514 578518	176,56 176,56
	SA 22		578520	176,56
	SA 28		578522	176,56
	M 12 M 15 ¹⁾		578310 578312	146,98 146,98
	M 18 ¹⁾		578314	146,98
	M 22 ¹⁾		578316	146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 12 S (PR-2B)	Mini Z8	574736 R	124,51
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B) V 12	Mini Z8	574746 R 578324	136,96 146,98
	V 15 ¹⁾		578328	146,98
	V 18 ¹⁾		578332	146,98
	V 22 ¹⁾ V 28		578334 578336	146,98 146,98
	V 35		578604	178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124,51 124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Mini Z8 Mini Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	
SANITOP	M 15		578312	146,9
PERMATUBO INOX	M 18		578314	146,9
	M 22 M 28		578316	146,9
	м 20 М 35		578318 578390	146,9 178,1
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
ANPRO	TH 16		578352 R	177,0
HPRESS	TH 20		578358 R	177,0
	TH 26 TH 32		578362 R 578364	177,0 177,0
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,9
ATEC SK VITerm	TH 16		578352 R	177,0
	TH 18		578356	177,0
	TH 20		578358 R	177,0
	TH 26		578362 R	177,0
	TH 32		578364 578386	177,0
AVEUR REFLEX	U 40 TH 16		578355 R	236,6
EX Water	TH 20		578358 R	177,0 177,0
LA Water	TH 25		578360	177,0
	TH 32		578364	177,0
AVEUR REFLEX	TH 16		578352 R	177,0
EX-AL-PEX	TH 20		578358 R	177,0
ias	TH 25		578360	177,0
	TH 32		578364	177,0
chütz	TH 14		578348	177,0
uo-flex	TH 16		578352 R	177,0
ri-o-flex	TH 17		578354	177,0
	TH 20 TH 25		578358 R 578360	177,0 177,0
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
chwer Fittings	M 12		578310	146,9
QUApress	M 15		578312	146,9
	M 18		578314	146,9
	M 22		578316	146,9
	M 28		578318	146,9
	M 35		578390	178,1
	M 12 S (PR-2B) M 15 S (PR-2B)	Mini Z8 Mini Z8	574736 R	124,5
	M 18 S (PR-2B)	Mini Z8	574738 R 574740 R	124,5 124,5
	M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574742 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
eppelfricke	> Aalberts integrated piping systems			
ESTA	TH 14		578348	177,0
ESTA GAS	TH 16		578352 R	177,0
	TH 20		578358 R	177,0
	TH 26 TH 32		578362 R 578364	177,0 177,0
ESTA	H 16		578400	159,7
istema	H 20		578406	159,
ultistrato	TH 14		578348	177,0
	TH 16		578352 R	177,0
	TH 18		578356	177,0
	TH 20		578358 R	177,
	TH 26		578362 R	177,
	TH 32		578364	177,
	TH 40		578624	234,
	U 16 U 20		578374 578378	165, 165,
IGMA LI	TH 16		578352 R	177,
remium	TH 20		578358 R	177,
	TH 25		578360	177,
	TH 32		578364	177,
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,
	U 16		578374	165,
	U 20		578378	165,
	U 25		578380	165,
LOVARM	U 32 U 16		578382 578374	194, 165,
EX-THERM	U 20		578374 578378	165,
	H 26		578410	159,
	U 32		578382	194,
	H 16		578400	159,
	H 20		578406	159,
	H 26		578410	159,
	H 32		578412	159,

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
STANDARD HIDRAULICA MultiStandard	H 16 H 20 H 25 H 32 RFz 16 RFz 20 RFz 25 RFz 32 TH 16 TH 20 TH 25 TH 32 TH 165 (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 32 S (PR-2B) U 16 U 18 U 25	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578400 578408 578408 578412 578492 578494 578496 578352 R 578358 R 578358 R 578360 578364 574782 R 574792 R 574798 R 574797 R 574798 R 574798 R 574798 R 574798 R 574798 R 574798 R	159,75 159,75 159,75 159,75 184,45 184,45 184,45 177,08 177,08 177,08 124,51 124,51 124,51 124,51 165,66 165,66	TDM BRASS Serie 2600	H 16 H 18 H 20 H 25 H 26 H 32 TH 16 TH 18 TH 20 TH 25 TH 25 TH 26 TH 18 S (PR-2B)** TH 18 S (PR-2B)** TH 25 S (PR-2B)** TH 25 S (PR-2B)** U 16 U 18	Mini 28 Mini 28 Mini 28 Mini 28 Mini 28 Mini 28	578400 578404 578406 578408 578410 578412 578352 R 578356 578358 R 578360 578362 R 578368 574782 R 574782 R 574788 R 574792 R 574794 R 578374	159,75 159,75 159,75 159,75 159,75 177,08 177,08 177,08 177,08 177,08 124,51 124,51 124,51 124,51 124,51
steeltrade Presssystem Edelstahl Kontur M	U 32 U 40 M 15 M 18 ¹¹ M 22 M 28 ²¹ M 35 M 15 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B)	Mini 28 Mini 28 Mini 28 Mini 28	578382 578386 578312 578314 578316 578318 578390 574738 R 574740 R 574742 R 574744 R	194,31 236,66 146,98 146,98 146,98 178,12 124,51 124,51 124,51 124,51	TDM BRASS Serie 1700 gas	U 20 U 25 U 26 ⁷⁷ U 32 TH 16 TH 20 TH 26 THL 32 TH 16 S (PR-2B)**	Mini Z8	578378 578380 578392 578382 578352 R 578358 R 578352 R 578362 R 578368 574782 R	165,66 165,66 194,31 194,31 177,08 177,08 177,08 177,08
STELBI Polikraft	M 35 S (PR-2B) H 16 H 20 H 26 TH 16 TH 20 TH 26 TH 32 TH 40 TH 16 S (PR-2B)** TH 20 S (PR-2B)** TH 32 S (PR-2B) U 16 U 20	Mini 28 Mini 28 Mini 28 Mini 28 Mini 28	574746 R 578400 578406 578410 578352 R 578352 R 578358 R 578364 578664 574782 R 574794 R 574798 R 574798 R 574378	136,96 159,75 159,75 177,08 177,08 177,08 234,69 124,51 124,51 124,51 136,96 165,66	TermoConcept TC-PRESS THERMOLUTZ TE-SA TE-SA press serie 800	TH 20 S (PR-2B)** TH 26 S (PR-2B)** Basic E01 ²⁾ H 14 H 16 TH 20 TH 20 S (PR-2B)** TH 14 TH 16 TH 18 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20 TH 20	Mini 28 Mini 28 Mini 28	574788 R 574794 R 578618 578398 578400 578358 R 574788 R 578348 578352 R 578352 R 578352 R 578354 S	124,51 124,51 305,17 159,75 159,75 177,08 124,51 177,08 177,08 177,08
STELBI Stelgas	U 26 ⁷⁾ TH 16 TH 20 TH 26 TH 16 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8 Mini Z8	578392 578352 R 578358 R 578362 R 574782 R 574788 R 574794 R	194,31 177,08 177,08 177,08 124,51 124,51 124,51		TH 40 TH 14 S (PR-2B)** TH 16 S (PR-2B)** TH 18 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578624 574778 R 574782 R 574786 R 574788 R 574794 R	234,69 124,51 124,51 124,51 124,51 124,51
STH Westco COPPER PRESS	M 15 M 22 M 28 M 35 M 15 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Mini Z8 Mini Z8 Mini Z8 Mini Z8	578312 578316 578318 578390 574738 R 574742 R 574744 R 574746 R	146,98 146,98 146,98 178,12 124,51 124,51 124,51 136,96	THERMACOME ACOPEX ALU	TH 32 S (PR-2B) H 16 H 20 H 32 TH 16 TH 20 TH 20 TH 20 TH 20 TH 26 TH 32	Mini 28	574798 R 578400 578406 578410 578412 578352 R 578358 R 578362 R 578364	136,96 159,75 159,75 159,75 159,75 177,08 177,08 177,08
TDM BRASS Serie 1600	H 16 H 18 H 20 H 25 H 26 H 32 TH 16 TH 18 TH 20 TH 25 TH 26 TH 18 TH 20 TH 26 TH 18 (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** U 16 U 18 U 20 U 25 U 26 ⁷⁷ U 32	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578400 578404 578406 578408 578410 578412 578352 R 578358 R 578358 R 578358 R 578362 R 578368 578624 574782 R 574786 R 574786 R 574787 R 574794 R 574794 R 574794 R 574794 R 578374 578378 578378 578378 578378 578380 578392 578382	159,75 159,75 159,75 159,75 159,75 159,75 177,08 177,08 177,08 177,08 234,69 124,51 124,51 124,51 124,51 124,51 165,66 165,66 165,66	TIEMME 1650 AL-COBRAPEX TIEMME 1700 COBRAPEX	U 16 U 20 U 32 TH 14 TH 16 TH 18 TH 20 TH 25 TH 26 TH 132 TH 40 TH 14 S (PR-2B)** TH 16 S (PR-2B)** TH 18 S (PR-2B)** TH 25 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** TH 27 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 27 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)**	Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8 Mini Z8	578374 578378 578382 578382 578352 R 578358 R 578358 R 578360 578362 R 578362 R 578368 578624 574778 R 574782 R 574786 R 574792 R 574794 R 574794 R 578490 578492 578494 578496 578496 578498 578498 578498 578498 578498	165.66 165.66 194.31 177.08 177.08 177.08 177.08 177.08 177.08 234.69 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 124.51 12

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini <i>l</i> pressing rings	Driven by adapter tongs	ArtNo.	€
TIEMME	TH 16		578352 R	177,08
1650 AL-COBRAPEX Gas	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	THL 32		578368	177,08
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
TIGRE	TH 16		578352 R	177,08
ALPEX GAS	TH 20 TH 26		578358 R 578362 R	177,08 177,08
	TH 32		578364	177,08
TKM Systemtechnik	TH 14 TH 16		578348 578352 R	177,08 177,08
oy ote intee inink	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 40		578364 578624	177,08 234,69
TRA Multi TRA+	H 16		578400	159,75
	H 20 H 25		578406 578408	159,75 159,75
	H 26		578410	159,75
	H 32 TH 16		578412 578352 R	159,75
	TH 20		578358 R	177,08 177,08
	TH 25		578360	177,08
	TH 26 TH 32		578362 R 578364	177,08 177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B) U 16	Mini Z8	574798 R 578374	136,96 165,66
	U 20		578378	165,66
	U 25		578380	165,66
	U 26 ⁷⁾ U 32		578392 578382	194,31 194,31
	U 40		578386	236,66
TRA MULTITRAPRESS	U 16 U 18		578374 578376	165,66
	U 20		578378	165,66 165,66
	U 25		578380	165,66
	U 32 U 40		578382 578386	194,31 236,66
TRA TRAPRESS	H 12		578396	159,75
	H 16 H 20		578400 578406	159,75 159,75
	H 25		578408	159,75
	H 32		578412	159,75
	RFz 12 RFz 16		578490 578492	184,45 184,45
	RFz 20		578494	184,45
	RFz 25		578496	184,45 184,45
Tradelink	RFz 32 K16/P18		578498 578592	184,45
TradePex Crimp	K/20		578594	184,45
Water	K/25 K32		578596 578598	184,45 184,45
	K1/40		578600	184,45
Tradelink	K16/P18		578592	184,45
TradePex Crimp Gas	K/20 K/25		578594 578596	184,45 184,45
	K32		578598	184,45
TUBIPLAST ITALY	K1/40 H 16		578600 578400	184,45 159,75
MULTILAYER PIPE	H 18		578404	159,75
	H 20		578406	159,75
	H 26 H 32		578410 578412	159,75 159,75
	TH 16		578352 R	177,08
	TH 18 TH 20		578356 578358 R	177,08 177,08
	TH 26		578362 R	177,00
	TH 32		578364	177,08
	TH 40 TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574794 R 574798 R	124,51 136,96
	U 16		578374	165,66
	U 18 U 20		578376 578378	165,66 165,66
	U 26 ⁷⁾		578392	194,31
TUDIDI ACTUTALY	U 32		578382	194,31
TUBIPLAST ITALY MULTILAYER PIPE	TH 16 TH 18		578352 R 578356	177,08 177,08
GAS SYSTEM	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32 TH 16 S (PR-2B)**	Mini Z8	578364 574782 R	177,08 124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8 Mini Z8	574786 R 574788 R 574794 R	124,51 124,51 124,51

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	1
TWEETOP	U 16		578374	165,6
	U 20		578378	165,6
	U 25		578380	165,6
	U 32 U 40		578382 578386	194,3 236,6
	0 40	U	370300	230,0
11111041 40		0	58008/	4/5/
UNICAL AG Max-multipex	U 16 U 20		578374 578378	165,6 165,6
PIAK MOLITICA	H 26		578410	159,7
	U 26 ⁷⁾		578392	194,3
	U 32		578382	194,3
UNIDELTA	TH 16		578352 R	177,0
DELTAPRESS	TH 20 TH 26		578358 R 578362 R	177,0 177,0
	TH 32		578364	177,0
	TH 40		578624	234,6
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B) H 16	Mini Z8	574798 R 578400	136,9 159,7
	H 20		578406	159,7
	H 26		578410	159,7
	H 32		578412	159,7
	U 16		578374	165,6
	U 20 U 32		578378	165,6 194.3
	U 32 U 40		578382 578386	236,
UNIDELTA	TH 16		578352 R	177.0
DELTAPRESS GAS	TH 20		578358 R	177,0
	TH 26		578362 R	177,0
	TH 32	W: : 70	578364	177,0
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Mini Z8 Mini Z8	574788 R 574794 R	124,! 124,!
	TH 32 S (PR-2B)	Mini Z8	574774 R	136,9
	H 16		578400	159,
	H 20		578406	159,7
	H 26		578410	159,7
	H 32		578412	159,7
	U 16 U 20		578374 578378	165,6 165,6
	U 32		578382	194,3
Jponor	UP 14		578576	165,6
	UP 16		578578	165,6
	UP 20		578582	165,6
	UP 25 UP 32		578584	165,6
	U 40		578586 578386	194,3 236,6
		V		
Valsir Bravopress	B 16 B 20		578468 578472	193,2 193,2
	B 26		578474	213,0
	B 32		578476	213,0
	F 16		578456	168,
	F 20		578460	168,
	F 26		578462	182,
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Mini Z8 Mini Z8	574728 R 574730 R	124, 124,
	F 26 S (PR-2B)**	Mini Z8	574730 R 574732 R	124,
	H 16	20	578400	159,
	H 20		578406	159,
	H 26		578410	159,
	H 32		578412	159,
	H 32 V TH 16		578602 578352 R	204, 177,
	TH 20		578358 R	177,
	TH 26		578362 R	177,
	TH 32		578364	177,
	U 16		578374	165,
	U 20		578378	165,
	U 26 ⁷⁾ U 32		578392 578382	194, 194,
alsir PEXAL	H 14		578398	159,
- ******	H 16		578400	159,
	H 20		578406	159,
	H 26		578410	159,
	H 32		578412	159,
	H 32 V		578602 578352 R	204, 177,0
			J/0332K	1//,
	TH 16			177 (
			578358 R 578362 R	
	TH 16 TH 20		578358 R	177,0
	TH 16 TH 20 TH 26 TH 32 U 16		578358 R 578362 R 578364 578374	177,I 177,I 165,I
	TH 16 TH 20 TH 26 TH 32		578358 R 578362 R 578364	177,(177,(177,(165,(165,(

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	•
Van Marcke NV	TH 16		578352 R	177,0
SYSTEMPEX	TH 20		578358 R	177,0
	TH 26		578362 R	177,01
	TH 32		578364	177,01
	TH 40	M:=: 70	578624	234,69
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Mini Z8 Mini Z8	574782 R 574788 R	124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5° 124,5°
	TH 32 S (PR-2B)	Mini Z8	574774 R 574798 R	136,9
Van Marcke NV	M 12	11111120	578310	146,91
Tubipress	M 15		578312	146,91
	M 18		578314	146,91
	M 22		578316	146,91
	M 28		578318	146,98
	M 35		578390	178,1
	M 12 S (PR-2B)	Mini Z8	574736 R	124,5
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
Variotherm	TH 11,6		578344	177,01
System TH	TH 16		578352 R	177,01
	TH 20 TH 16 S (PR-2B)**	Mini Z8	578358 R	177,01
	TH 20 S (PR-2B)**	Mini Z8	574782 R 574788 R	124,5° 124,5°
VESBO	M 15	MIIII 20	578312	146,91
CARBON	M 18		578314	146,91
	M 22		578316	146,91
	M 28		578318	146,91
	M 35		578390	178,1
	M 15 S (PR-2B)	Mini Z8	574738 R	124,5
	M 18 S (PR-2B)	Mini Z8	574740 R	124,5
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,9
VESB0	M 15		578312	146,91
INOX	M 18		578314	146,91
	M 22		578316	146,91
	M 28		578318	146,91
	M 35	M:-: 70	578390	178,13
	M 15 S (PR-2B) M 18 S (PR-2B)	Mini Z8 Mini Z8	574738 R 574740 R	124,5° 124,5°
	M 22 S (PR-2B)	Mini Z8	574740 R 574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574744 R	136,9
VESBO	TH 16	111111 20	578352 R	177,01
MULTIPRESS TH-U	TH 20		578358 R	177,01
	TH 26		578362 R	177,01
	TH 32		578364	177,01
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,5
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,9
	U 16		578374	165,6
	U 20		578378	165,6
	U 26 ⁷⁾		578392	194,3
	U 32		578382	194,3
VESB0	U 16		578374	165,6
VPREMIUM	U 20		578378	165,6
	U 25		578380	165,6
	U 32 U 40		578382 578386	194,3° 236,6
Viega Fonterra	VX 12		578550	204,1
• icga i uniciia	VP 14/15		578480	176,5
	VP 16/17		578482	176,50
	VP 20		578484	176,5
	VP 25		578486	176,5
Viega MegaPress	VMP ½" G (OD 21,3 mm)		578666 R	204,1
(ASTM)5)	VMPz 3/4" (OD 26,9 mm)		578664	204,1
Viega MegaPress 304	VMP ½" G (OD 21,3 mm)		578666 R	204,1
FKM	VMPz ¾" (OD 26,9 mm)		578664	204,1

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Viega MegaPress 316 (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm)		578666 R 578664	204,17 204,17
Viega MegaPress 316	VMPz ¾" (OD 26,9 mm) VMP ½" G (OD 21,3 mm)		578666 R	204,17
FKM (ASTM) ⁵⁾	VMPz ¾" (OD 26,9 mm)		578664	204,17 182,50
	VMP ½" G (OD 21,3 mm)		578666 R	204,17
(ASTM) ⁵⁾	VMPz ¾" (OD 26,9 mm)		578664	204,17
Viega MegaPress FKM (ASTM) ⁵⁾	VMP ½" G (OD 21,3 mm) VMPz ¾" (OD 26,9 mm)		578666 R 578664	204,17 204,17
Viega MegaPresG	VMP 1/2" G (OD 21,3 mm)		578666 R	204,17
(ASTM) ⁵⁾ Viega Megapress	VMPz ¾" (OD 26,9 mm) VMP ¾" (OD 17.2 mm)		578664 578660	204,17 204,17
(EN) ⁴⁾	VMP ½" G (OD 21,3 mm)		578666 R	204,17
	VMPz ¾" (OD 26,9 mm)		578664	204,17
Viega MegapressS (EN) ⁴⁾	VMP 3/8" (OD 17,2 mm) VMP 1/2" G (OD 21,3 mm)		578660 578666 R	204,17 204,17
(LII)	VMPz 3/4" (OD 26,9 mm)		578664	204,17
Viega Pexfit	VX 16		578552	204,17
	VX 20 VX 25		578554 578556	204,17 204,17
Viega Pexfit G	VX 16		578552	204,17
	VX 20		578554	204,17
Viega Prestabo	VX 25 V 12		578556 578324	204,17 146,98
*icya r i colduu	V 15		578328	146,98
	V 18		578332	146,98
	V 22 V 28		578334 578336	146,98 146.98
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Mini Z8 Mini Z8	574758 R 574760 R	124,51 124.51
Viega Profipress	V 12		578324	146,98
	VG 14		578338	146,98
	V 15 VG 16		578328 578340	146,98 146,98
	V 18		578332	146,98
	V 22		578334	146,98
	V 28 V 35		578336 578604	146,98 178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	VG 14 S (PR-2B)	Mini Z8	574750 R	124,51
	V 15 S (PR-2B) VG 16 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574754 R	124,51 124,51
	V 18 S (PR-2B)	Mini Z8	574754 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
Viega Profipress G	V 12	MIIII ZU	578324	146,98
	VG 14		578338	146,98
	V 15 VG 16		578328 578340	146,98 146,98
	V 18		578332	146,78
	V 22		578334	146,98
	V 28		578336	146,98
	V 35 V 12 S (PR-2B)	Mini Z8	578604 574748 R	178,12 124,51
	VG 14 S (PR-2B)	Mini Z8	574750 R	124,51
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	VG 16 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574754 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
Viega Profipress S	V 35 S (PR-2B) V 12	Mini Z8	574762 R 578324	136,96 146,98
	V 15		578328	146,98
	V 18		578332	146,98
	V 22 V 28		578334 578336	146,98 146,98
	V 35		578604	178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51
	V 35 S (PR-2B)	Mini Z8	574762 R	136,96

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\rm 2)}\,$ For taking suitable pressing inserts.
- 3) Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- $^{4)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{\rm 6)}$ Only use Mini pressing tongs identified by "VMP $1\!/\!2$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

System	Pressing tongs Mini/ pressing rings	Driven by adapter tongs	ArtNo.	€
Viega	V 12		578324	146,98
Profipress Therm	V 15 V 18		578328 578332	146,98 146,98
	V 22	W: : 70	578334	146,98
	V 12 S (PR-2B) V 15 S (PR-2B)	Mini Z8 Mini Z8	574748 R 574752 R	124,51 124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
Viega ProPress	V 22 S (PR-2B) VUS ½" (OD 15,9 mm)	Mini Z8	574758 R 578566	124,51 177,50
(ASTM)5)	VUS 3/4" (OD 22,2 mm)		578568	177,50
	VUS 1" (OD 28,6 mm) VUS 1¼" (OD 34,9 mm)		578570 578606	177,50 177,50
	VUS 1/2" S (PR-2B) (OD 15,9 mm)	Mini Z8	574764 R	124,5
	VUS ¾" S (PR-2B) (OD 22,2 mm) VUS 1" S (PR-2B) (OD 28,6 mm)	Mini Z8 Mini Z8	574766 R 574768 R	124,5° 124,5°
	VUS 11/4" S (PR-2B) (OD 34,9 mm)	Mini Z8	574770 R	124,5
Viega ProPress 304 FKM	VUS ½" (OD 15,9 mm) VUS ¾" (OD 22,2 mm)		578566 578568	177,50 177,50
(ASTM) ⁵⁾	VUS 1" (OD 28,6 mm)		578570	177,50
Viega ProPress 316	VUS 1¼" (OD 34,9 mm) VUS ½" (OD 15,9 mm)		578606 578566	177,50 177,50
(ASTM)5)	VUS ¾" (OD 22,2 mm)		578568	177,50
	VUS 1" (OD 28,6 mm) VUS 1¼" (OD 34,9 mm)		578570 578606	177,50 177,50
Viega Propress	VAU 15 (OD 12,7 mm)		578630	151,86
NATER System AUS	VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm)		578632 578634	151,86
403	VAU 32 (OD 31,8 mm)		578636	151,8 <i>6</i> 159,75
	VAU 15 S (PR-2B) (OD 12,7 mm)	Mini Z8	574804 R	124,51
	VAU 20 S (PR-2B)** (OD 19,1 mm) VAU 25 S (PR-2B)** (OD 25,4 mm)	Mini Z8 Mini Z8	574806 R 574808 R	124,51 136,96
// D 0	VAU 32 S (PR-2B) (OD 31,8 mm)	Mini Z8	574856 R	136,96
Viega PropressG GAS System	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm)		578630 578632	151,8 <i>6</i> 151,8 <i>6</i>
AUS	VAU 25 (OD 25,4 mm)		578634	151,86
Viega Raxinox	VAU 32 (OD 31,8 mm) VRX 16		578636 578640	159,75 186,42
	VRX 20		578642	186,42
Viega Raxofix	VRX 16 VRX 20		578640 578642	186,42 186,42
	VRX 25		578644	204,17
Viega Sanfix	VRX 32 VP 16/17		578646 578482	204,17
riegu ouiiiix	VP 20		578484	176,5
	VP 25 VP 32		578486 578488	176,56 195,25
Viega Sanfix Fosta	VP 16/17		578482	176,56
	VP 20 VP 25		578484 578486	176,56 176,56
	VP 32		578488	195,25
Viega Sanpress	V 12 V 15		578324 578328	146,98 146,98
	V 18		578332	146,98
	V 22		578334	146,98
	V 28 V 35		578336 578604	146,98 178,12
	V 12 S (PR-2B)	Mini Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
/iega Sanpress Inox	V 15		578328	146,98
	V 18 V 22		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35 V 15 S (PR-2B)	Mini Z8	578604 574752 R	178,12 124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
/iega	V 15		578328	146,98
Ganpress Inox G	V 18 V 22		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35 V 15 S (PR-2B)	Mini Z8	578604 574752 R	178,12 124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Mini Z8 Mini Z8	574760 R 574762 R	124,51 136,96
liega Smartpress	VX 16		578552 578554	204,17
	VX 20 VX 25		578554 578556	204,17 204,17
/iega Temponox	V 15		578328	146,98
	V 18 V 22		578332 578334	146,98 146,98
	V 28		578336	146,98
	V 35 V 15 S (PR-2B)	Mini Z8	578604 574752 R	178,12 124,51
	V 18 S (PR-2B)	Mini Z8 Mini Z8	574752 R 574756 R	124,5
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
	V 28 S (PR-2B)	Mini Z8	574760 R	124,51

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
Viessmann	TH 14		578348	177,08
	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
Vogel & Noot	TH 16		578352 R	177,08
EASYTEC	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
VSH	> Aalberts integrated piping sys	stems		

	TH 32 5 (PR-2B)	MINI Z8	5/4/98 K	130,90
VSH	> Aalberts integrated piping systems			
	W			
Watts MTR	TH 16		578352 R	177,08
Art press	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
WATTO	TH 32		578364	177,08
WATTS Radiant	US 1/8" US 1/2"		578534 578536	201,16 201,16
Watts WaterPEX	US 3/4"		578538	201,16
	US 1"		578540	201,16
WATTS	US 3/8"		578534	201,16
RADIANT	US 1/2"		578536	201,16
Watts	US ¾"		578538 578540	201,16
RadiantPEX WATTS	US 1" U 16 (½")		578374	201,16
RADIANT	U 20 (5/8")		578378	165,66
Watts	U 25 (¾")		578380	165,66
RadiantPEX-AL	U 32 (1")		578382	194,31
Wavin	B 16		578468	193,28
Tigris K5/M5	B 20		578472	193,28
	B 32 H 16		578476	213,00
	H 20		578400 578406	159,75 159,75
	H 25		578408	159,75
	H 32		578412	159,75
	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 25		578360	177,08
	TH 32 TH 40		578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	578624 574782 R	234,69 124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Mini Z8	574792 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16		578374	165,66
	U 20		578378	165,66
	U 25		578380	165,66
	U 32 U 40		578382 578386	194,31
	UP 16		578578	236,66 165,66
	UP 20		578582	165,66
	UP 25		578584	165,66
	UP 32		578586	194,31
WEECON	M 15		578312	146,98
PRESS-C-Stahl	M 18		578314	146,98
	M 22		578316	146,98
	M 28 M 35		578318 578390	146,98 178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,51
	M 28 S (PR-2B)	Mini Z8	574744 R	124,51
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
WEECON	M 15		578312	146,98
PRESS-Edelstahl	M 18 M 22		578314	146,98
	M 28		578316 578318	146,98 146,98
	M 35		578390	178,12
	M 15 S (PR-2B)	Mini Z8	574738 R	124,51
	M 18 S (PR-2B)	Mini Z8	574740 R	124,51
	M 22 S (PR-2B)	Mini Z8	574742 R	124,5
	M 28 S (PR-2B)	Mini Z8	574744 R	124,5
	M 35 S (PR-2B)	Mini Z8	574746 R	136,96
WEECON DDESS Kunfor	V 15		578328	146,98
PRESS-Kupfer	V 18		578332 578334	146,98
	V 22 V 28		578334 578336	146,98 146,98
	V 35		578604	178,12
	V 15 S (PR-2B)	Mini Z8	574752 R	124,51
	V 18 S (PR-2B)	Mini Z8	574756 R	124,51
	V 22 S (PR-2B)	Mini Z8	574758 R	124,51
		Mini Z8 Mini Z8 Mini Z8	574758 R 574760 R 574762 R	124,51 124,51 136,96

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
WEM	U 16		578374	165,66
WIELAND-WERKE	TH 14		578348	177,08
cuprotherm CTX	TH 16		578352 R	177,08
	TH 14 S (PR-2B)**	Mini Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
WKS-Press	TH 14		578348	177,08
	TH 16		578352 R	177,08
	TH 17		578354	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
WÜRTH	TH 16		578352 R	177,08
Würth	TH 20 578358 R		177,08	
	TH 26		578362 R	177,08
	HE 32		578370 R	212,0
		X		
XtraConnect	F 16		578456	168,68
	F 20		578460	168,68
	F 26		578462	182,48
	F 32		578464	182,48
	F 16 S (PR-2B)**	Mini Z8	574728 R	124,51
	F 20 S (PR-2B)**	Mini Z8	574730 R	124,51
	F 26 S (PR-2B)**	Mini Z8	574732 R	124,51
	F 32 S (PR-2B)	Mini Z8	574734 R	136,96
	H 16		578400	159,75
	H 20		578406	159,75
	H 26		578410	159,75
	H 32		578412	159,75
	TH 16		578352 R	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
	U 16		578374	165,66
	U 20		578378	165,66
(DN 26)	U 25		578380	165,66
	U 32		578382	194,31
	VP 16		578482	176,56
	VP 20		578484	176,56
	VP 32		578488	195,25
		Υ		
YX COPPER	Yz 16 UNI		578740	184,45
JNIPEX Water & Gas	Yz 20 UNI		578742	184,45
	Yz 25 UNI		578744	184,4

System	Pressing tongs Mini / pressing rings	Driven by adapter tongs	ArtNo.	€
		Z		
ZEWOTHERM	TH 12		578346	177,08
Zewo Press Premium	TH 16		578352 R	177,08
	TH 17		578354	177,08
	TH 18		578356	177,08
	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 40		578624	234,69
	TH 12 S (PR-2B)**	Mini Z8	574776 R	124,51
	TH 16 S (PR-2B)**		574782 R	124,51
	TH 17 S (PR-2B)**	Mini Z8	574784 R	124,51
	TH 18 S (PR-2B)**	Mini Z8	574786 R	124,51
	TH 20 S (PR-2B)**		574788 R	124,51
	TH 26 S (PR-2B)**		574794 R	124,51
	TH 32 S (PR-2B)		574798 R	136,96
ZEWOTHERM	TH 16		578352 R	177,08
Zewo Press PPSU	TH 20		578358 R	177,08
	TH 26		578362 R	177,08
	TH 32		578364	177,08
	TH 16 S (PR-2B)**	Mini Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Mini Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Mini Z8	574794 R	124,51
	TH 32 S (PR-2B)	Mini Z8	574798 R	136,96
ZURN	US 3/8"		578534	201,16
INDUSTRIES	US 1/2"		578536	201,16
ZURN PEX	US 3/4"		578538	201,16
	US 1"		578540	201,16

Pressfitting systems for gas installations must only be pressed with REMS pressing tongs Mini/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- $^{\scriptscriptstyle 2)}\,$ For taking suitable pressing inserts.
- Only pressing tongs from designation "117" (1st quarter of 2017), "217" (2nd quarter of 2017) etc. can be used. The designation is stamped on every pressing jaw.
- ⁴⁾ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- ⁵⁾ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{6)}$ Only use Mini pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ⁷⁾ Previous designation: Mini C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 183 for adapter tongs. Pressing tongs for additional pressfitting systems on request.

Accessories

Description	ArtNo.	€
Adapter tongs Mini Z8 for driving REMS pressing rings S (PR-2B)	574700R	144,28
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516R	96,53
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704R	146,36
Steel case with insert for 8 pressing tongs Mini/ cropping tongs Mini and compartment for pipe cutter up to 42 mm	578295R	96,53
L-Boxx system case with insert for 11 pressing tongs Mini and 6 pressing rings S (PR-2B)	578659R	146,36











High performance cropping tongs Mini in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to

hardness classification 4.8 (400 N/mm²) M 6 – M 10

REMS cropping tongs Mini – cuts in just 2 seconds!

Made of forged and specially hardened steel.

Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr

Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting

Cutting device in pliers design (Patent EP 1 459 825, patent US 7,284,330). Very compact design and low weight of the REMS Mini cropping tongs due to special arrangement of the cropping tongs connection (Patent EP 1 952 948). Recesses in the connecting plate for safe guidance of the connecting lugs for offset-free pressing (Patent EP 2 347 862).

Can be driven by all REMS radial presses 22 kN.









German Quality Product



Patent EP 1 952 948 Patent EP 1 459 825 Patent US 7,284,330 Patent EP 2 347 862

Supply format

REMS cropping tongs Mini. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6-M 10. In a carton.

Description	for threaded rods	ArtNo.	€
REMS cropping tongs Mini M 6	M 6	578620	241,85
REMS cropping tongs Mini M 8	M 8	578621	241,85
REMS cropping tongs Mini M 10	M 10	578622	241,85

Accessories

Description	for threaded rods	ArtNo.	€
Cropping inserts M 6 (pair)	M 6	571891	111,07
Cropping inserts M 8 (pair)	M 8	571896	111,07
Cropping inserts M 10 (pair)	M 10	571866	111,07
Steel case with insert for 8 pre	ssing tongs Mini/cropping		
tongs Mini and compartment for	or pipe cutter up to 42 mm	578295R	96,53





Universal, manual radial press for producing pipe pressing joints for common pressfitting systems.

Pressing joints with plastic and multi-layer composite tubes

Ø 10 – 26 mm Ø 3/8 – 1"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 198 – 238.

REMS Eco-Press – universal up to \emptyset 26 mm. Secure crimping in seconds.

System advantage

Only one type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked with * have another connection and also fit the manual radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8.

Pressing tongs/pressing rings for all common systems


Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–238). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. For driving the REMS pressing rings S (PR-2B) adapter tongs Z8 are required, see page 238.

Design

Compact, handy, light. Drive unit with short tubular arms only 1.6 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs through locking pins. Dividable tubular arms for individual adjustment of leverage to accomodate different force demands of different pressfitting systems.

Pressing operation

A perfect joint is achieved when pressing tongs close completely. Final-lock-positioning, the pressing jaws remain in a closed position until opening. This way, the perfect pressing joint (completely closed pressing jaws) can be observed.

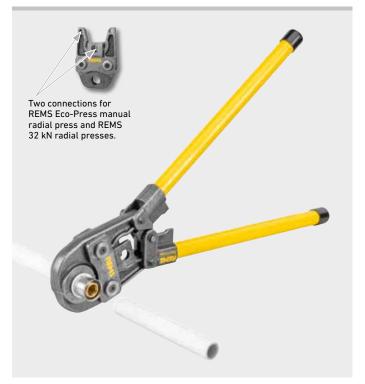





German Quality Product



Supply format

REMS Eco-Press drive unit. Manual radial press with final-lock-positioning for producing pressing joints of plastic and multi-layer composite tubes Ø 10-26 mm, Ø %-1". For driving REMS pressing tongs/pressing rings. With dividable tubular arms. In skin package.

€	ArtNo.	
227,32	574000R	



Accessories

Description	ArtNo.	€			
REMS pressing tongs/pressing rings, see page 198 – 238.					
Adapter tongs Z8 for driving REMS pressing rings S (PR-2B)	574702R	144,28			
REMS cropping tongs for threaded rods see page 241.					
Carrying bag for drive unit and for 3 pressing tongs	574436R	38,41			
Steel case with insert for drive unit and for 3 pressing tongs	574430R	96,53			











Universal, handy electric tool for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints

Ø 10 – 108 (110) mm

 $0^{3/8}-4^{-1}$

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 198 – 238.

REMS Power-Press SE – universal up to Ø 110 mm. Secure crimping in seconds.

Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked with * have another connection and also fit the manual radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–238). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 238.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Secure seating of pressing tongs/adapter tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing chains.

Pressing operation by touch-control

For reliable service, operating and functional safety. A perfect joint is achieved when pressing tongs close completely. The pressing tongs remain in a closed position until machine is switched and runs into reverse. The perfect pressing joint (completely closed pressing jaws) can be observed.

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-mechanical drive with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Overload protection. Safety tip switch.



German Quality Product





Supply format

REMS Power-Press SE Basic-Pack. Electric radial press 32 kN for producing pressing joints Ø 10 – 108 (110) mm, Ø % – 4". For driving REMS pressing tongs/ pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-mechanical drive with proven universal motor 230 V or 110 V, 50 – 60 Hz, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle, overload protection, safety tip switch. In sturdy steel case.

ArtNo.	€
572111 R220	964,30

Other voltages on request.

Accessories

Description	ArtNo.	€
REMS Power-Press SE Drive Unit	572101 R220	912,40
REMS pressing tongs/pressing rings see page 198-238	8.	
Adapter tongs for REMS pressing rings see page 238.		
REMS cropping tongs for threaded rods see page 241.		
REMS cable shear for electric cable see page 241.		
Steel case with insert	570280R	110,03





REMS Power-Press ACC

Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems.

Pipe pressing joints

Ø 10 – 108 (110) mm

Ø 3/8-4"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 198 – 238.

REMS Power-Press ACC – universal up to Ø 110 mm. Secure crimping in seconds. With automatic circuit control. Automatic locking of pressing tongs.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked with * have another connection and also fit the manual radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–238). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 238.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 4.7 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/pressing rings.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force $32\,\mathrm{kN}$. Powerful electro-hydraulic drive with proven universal motor $450\,\mathrm{W}$, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.



German Quality Product





Supply format

REMS Power-Press ACC Basic-Pack. Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints Ø 10–108 (110) mm, Ø %–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50–60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	ArtNo.	€
In sturdy steel case.	577010R220	1.462,54
In L-Boxx system case.	577013R220	1.504,06

Other voltages on request.





Accessories

Description	ArtNo.	€
REMS Power-Press ACC Drive Unit	577000R220	1.358,74
REMS pressing tongs/pressing rings see page 198-238	١.	
Adapter tongs for REMS pressing rings see page 238.		
REMS cropping tongs for threaded rods see page 241.		
REMS cable shear for electric cable see page 241.		
Steel case with insert	570280R	110,03
L-Boxx system case with inserts	571283R	146,36



REMS Power-Press XL ACC

Universal, powerful power tool with automatic circuit control for making press joints of all common press fitting systems.

Pipe pressing joints

Ø 10-108 (110) mm

 $0^{3/8}-4^{-1}$

Complete range of REMS pressing tongs/pressing rings/ pressing rings XL for all common pressfitting systems, see page 198-238.

REMS Power-Press XL ACC - universal up to Ø 110 mm. Pressing of \emptyset 10 – 108 mm in just one action. Ultra-fast, e.g. Geberit Mapress stainless steel Ø 108 mm in only 15 seconds. With automatic circuit control. Automatic locking of pressing tongs.

System advantage

Only one type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force

All pressing tongs marked with * have another connection and also fit the manual radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings/pressing rings XL for all common pressfitting systems (page 198–238). Highly durable pressing tongs/XL pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings/pressing rings XL are systemspecific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs are required, as an accessory, for driving the REMS (PR) pressing rings.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit only 5.5 kg. Long working stroke for pressings in a single action, ideal for large dimensions. Ultra-fast, e.g. Geberit Mapress stainless steel Ø 108 mm in only 15 seconds. Ergonomically designed housing with soft grip and recessed handle. Swivelling pressing tongs/adapter tongs seat. Secure seating of pressing tongs by automatic locking. Also suitable for other suitable makes of pressing tongs/ pressing rings. Adjustable hand guard.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force $32\,kN$. Powerful electro-hydraulic drive with proven universal motor $450\,W$, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.







German Quality Product



Supply format

REMS Power-Press XL ACC Basic-Pack. Electro-hydraulic radial press 32 kN with automatic retraction for producing pressing joints Ø 10-108 (110) mm, Ø 3/6-4". For driving REMS pressing tongs/pressing rings/pressing rings XL and other suitable makes of pressing tongs/pressing rings. Pressing tongs seat with automatic locking. Electro-hydraulic drive with proven universal motor 230 V or 110 V, 50-60 Hz, 450 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Version	ArtNo.	€
In transport case XL.	579010R220	2.385,32
In XL-Boxx system case.	579012R220	2.344,84
Other voltages on request.		






Accessories

handles

Description	ArtNo.	€
REMS Power-Press XL ACC drive Unit	579000 R220	2.096,76
Adapter tongs Z6 XL for driving REMS pressing rings 64.0–108.0 XL (PR-3S), 2½–4" XL (PR-3S) with REMS Power-Press XL ACC	579120R	373,68
Adapter tongs for other REMS pressing rings see page	238.	
REMS pressing tongs/pressing rings/pressing rings XL	see page 19	8-238.
REMS cropping tongs for threaded rods see page 241.		
REMS cable shear for electric cable see page 241.		
Transport case XL with inlays and practical carrying		

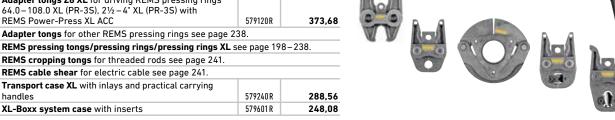



Universal, handy electric tool with automatic circuit control for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22 V Technology. For battery and corded operation.

Pipe pressing joints

Ø 10 – 108 (110) mm Ø 3/8 – 4"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 198 – 238.

REMS Akku-Press E 22 V ACC – universal up to Ø 110 mm. Secure crimping in seconds. With automatic circuit control. Anti-vibration system. Automatic locking of pressing tongs. Li-lon 21.6 V, 2.5 Ah battery for approx. 200 pressings Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked with * have another connection and also fit the manual radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–238). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 238.

Design

Compact, handy, super light. Drive unit with battery only 3.3 kg. Drive unit with pressing tongs V15 only 35.5 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing tongs seat, rotation angle > 360°. Secure seating of pressing tongs/adapter tongs by automatic locking. Also for other suitable makes of pressing tongs/pressing rings.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon 22 V Technology. Highly resistant Li-lon 21.6 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6 V, 2.5 Ah batteries for approx. 200 pressings, 4.4 Ah for approx. 350 pressings, 5.0 Ah for approx. 400 pressings, 9.0 Ah for approx. 720 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100-240V, 70 W. Rapid charger 100-240V, 290 W, for shorter charging times, as accessory. Voltage supply 220-240V/21.6V, 15 A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.







German Quality Product







The little one amongst the big. Only 3.3 kg.



Supply format

REMS Akku-Press E 22V ACC Basic-Pack. Cordless radial press $32\,\text{kN}$ with automatic circuit control for making press joints Ø 10-108 (110) mm, Ø %-4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6V, $380\,\text{W}$, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-lon $21.6\,\text{V}$, $2.5\,\text{Ah}$, rapid charger $100-240\,\text{V}$, $50-60\,\text{Hz}$, $70\,\text{W}$.

Version	ArtNo.	€
In sturdy steel case.	576016R220	1.806,12
In L-Boxx system case.	576017 R220	1.847,64

Other voltages on request.



Accessories

Description	ArtNo.	€
REMS pressing tongs/pressing rings see page 198-238	١.	
Adapter tongs for REMS pressing rings see page 238.		
REMS cropping tongs for threaded rods see page 241.		
REMS cable shear for electric cable see page 241.		
REMS Akku-Press E 22 V ACC drive unit,		
without battery	576006R22	1.255,98
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-Ion 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A,		
for mains operation instead of battery Li-lon 21.6 V.	571567 R220	414,16
Steel case with inlay	571290R	110,03
L-Boxx system case with inserts	576345R	146,36
REMS Lumen 2800 22V, cordless LED flood light, see pa	ge 111	



REMS Akku-Press 22V ACC

Cordless radial press 32 kN with automatic circuit control, pressure monitoring and result display

Universal, handy electric tool with automatic circuit control, pressure monitoring and result display, for producing pipe pressing joints for all common pressfitting systems. Li-lon 22V Technology. For battery and corded operation.

Pipe pressing joints

Ø 10 – 108 (110) mm Ø 3/8 – 4"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 198 – 238.

REMS Akku-Press 22 V ACC – universal up to Ø 110 mm. Secure crimping in seconds. With automatic circuit control, pressure monitoring and result display. Anti-vibration system. Automatic locking of pressing tongs. Li-lon 21.6 V, 2.5 Ah battery for approx. 200 pressings Viega Profipress DN 15 with one battery charge*.

System advantage

Only one type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked with * have another connection and also fit the manual radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–238). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 238.

Design

Compact, handy, super light. Drive unit with battery only 3.3 kg. Drive unit with pressing tongs V15 only 35.5 cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing tongs seat, rotation angle > 360°. Secure seating of pressing tongs/adapter tongs by automatic locking. Also for other suitable makes of pressing tongs/pressing rings.

Pressure monitoring and result display

Electronic pressure sensor for thrust force monitoring. Pressure evaluation after the pressing process. Result display with 2-coloured white/red LED.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon 22 V Technology. Highly resistant Li-lon 21.6 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6 V, 2.5 Ah batteries for approx. 200 pressings, 4.4 Ah for approx. 350 pressings, 5.0 Ah for approx. 400 pressings, 9.0 Ah for approx. 720 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range $-10\ to +60\ ^{\circ}\text{C}$. No memory effect for maximum battery power. Rapid charger 100-240V, 90W. Rapid charger 100-240V, 290W, for shorter charging times, as accessory. Voltage supply $220-240V/21.6V, 15\,\text{A}$ output, for mains operation instead of Li-lon battery $21.6\ V$, as accessory.







German Quality Product







The little one amongst the big. Only 3.3 kg.



Supply format

REMS Akku-Press 22V ACC Basic-Pack. Cordless radial press $32\,\mathrm{kN}$ with automatic circuit control, pressure monitoring and result display, for making press joints Ø 10-108 (110) mm, Ø %-4". For driving REMS pressing tongs/ pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electro-hydraulic drive with powerful battery motor $21.6\,\mathrm{V}$, $380\,\mathrm{W}$, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-lon $21.6\,\mathrm{V}$, $2.5\,\mathrm{Ah}$, rapid charger $100-240\,\mathrm{V}$, $50-60\,\mathrm{Hz}$, $90\,\mathrm{W}$.

Version	ArtNo.	€
In sturdy steel case.	576010R220	2.117,52
In L-Boxx system case.	576011 R220	2.159,04

Other voltages on request.



Accessories

Description	ArtNo.	€
REMS pressing tongs/pressing rings see page 198-2	38.	
Adapter tongs for REMS pressing rings see page 238.		
REMS cropping tongs for threaded rods see page 241.		
REMS cable shear for electric cable see page 241.		
REMS Akku-Press 22V ACC drive unit,		
without battery	576000R22	1.546,62
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-Ion 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100-240 V, 50-60 Hz, 90 W	571585 R220	175,42
Rapid charger 100-240 V, 50-60 Hz, 290 W	571587 R220	414,16
Voltage supply 220-240V/21.6V, 50-60Hz, 15A,		
for mains operation instead of battery Li-lon 21.6 V.	571567 R220	414,16
Steel case with inlay	571290R	110,03
L-Boxx system case with inserts	576345R	146,36
REMS Lumen 2800 22V, cordless LED flood light, see	page 111	



REMS Akku-Press 22 V Connected

Universal, handy electric tool with Connected functionality via Wi-Fi radio standard and OLED display for producing pipe pressing joints for all common pressfitting systems. Li-Ion 22 V Technology. For battery and corded operation.

Pipe pressing joints

Ø 10 – 108 (110) mm

Ø 3/8 – 4"

Complete range of REMS pressing tongs/ pressing rings for all common pressfitting systems, see page 198 – 238.

REMS Akku-Press 22 V Connected – universal up to Ø 110 mm. Secure crimping in seconds. With selectable ACC drive mode. Connected functionality via Wi-Fi radio standard and OLED display. Pressure monitoring and result display. Anti-vibration system. Automatic locking of pressing tongs. Electrically monitored closing position of the tong retaining bolt. Voice recordings with voice recognition. Creating reports with texts and pictures. Geolocalisation of the pressing sites. Li-lon 21.6 V, 2.5 Ah battery for approx. 200 pressings Viega Profipress DN 15 with one battery charge*.

System advantage

Only **one** type of pressing tongs/pressing rings for all REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force.

All pressing tongs marked with * have another connection and also fit the manual radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press using the adapter tong Z8.

Pressing tongs/pressing rings for all common systems

Complete assortment of REMS pressing tongs/pressing rings for all common pressfitting systems (page 198–238). Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing. Adapter tongs required for driving the REMS (PR) pressing rings, see page 238.

Design

Compact, handy, super light. Drive unit with battery only 3.3~kg. Drive unit with pressing tongs V15 only 36.3~cm long. Works anywhere, free-hand, overhead, also in particularly tight areas. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing with strong carrying ring for a shoulder strap. Softgrip surfaces. Two rows of LED work lights for illuminating the workplace as required, adjustable brightness in 4 stages and lighting time. Machine status check with charging state indication by 2-coloured green/red LED. Swivelling pressing tongs seat, rotation angle $> 360^\circ$. Secure seating of pressing tongs/adapter tongs by automatic locking. Electrically monitored closing position of the tong retaining bolt. Also for other suitable makes of pressing tongs/pressing rings.

Connected functionality

REMS Akku-Press 22V Connected offers various additional functionalities such as, for example: Recording of measuring/pressing data, creation of reports with your own company logo, display of error messages, configuration of the product (language, date, time, time zone, pressure unit, LED lighting time and LED brightness, standby time, ACC drive mode, information signal tones, etc.), set-up of usage bars (immediate bar or feedback interval as anti-theft, time and date ranges for barring times, limitation of the number of performable pressings), geolocalisation of the pressing sites, conversion of voice recordings into editable text, upload and save images of pressings, display of notices (annual inspection and periodic testing, new firmware version, battery state, etc.), download and installation of new firmware version.

Pressure monitoring and result display

Electronic pressure sensor for thrust force monitoring. Monitoring and display of pressure and maximum pressure during the pressing process. Pressure analysis after the pressing process with result display in the OLED display and with coloured LEDs. Display of the pressure-time diagram of the performed pressing directly in the OLED display. Storage of the measured/pressing data.

Voice recordings with voice recognition

A voice recording can be made and stored for every pressing with the microphone integrated into the drive unit. These can be converted into editable text and transferred to reports in the Service Portal.



























REMS Akku-Press 22 V Connected

Wi-Fi connection to the Cloud

REMS Akku-Press 22V Connected sends collected data (measuring and pressing data, error messages, configuration of the product, voice recordings, etc.) to the Cloud after registration and with an existing Internet connection. The data are processed and stored there. The user can access these data, upload and store pictures of pressings, create reports with texts and pictures and change the drive unit settings through the REMS Service Portal. The changes are transferred back to the drive unit via an existing Internet connection.

Selectable ACC drive mode

When ACC drive mode is switched on, the drive unit ends the pressing process automatically, emits an acoustic signal (clicking) and automatically returns (automatic circuit control). When ACC mode is switched off, the drive unit stops just before reaching the required pressure to be able to be able to monitor complete closing of the pressing tongs, pressing ring and pressing segments better at the end of the pressing process. The pressing process must be continued by pressing the safety switch again. The drive unit ends the pressing process automatically, emits an acoustic signal (clicking) and automatically returns (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 32 kN. High-performance, electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400 W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Safety switch.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6V, 2.5 Ah batteries for approx. 210 pressings, 4.4 Ah for approx. 370 pressings, 5.0 Ah for approx. 420 pressings, 9.0 Ah for approx. 750 pressings Viega Profipress DN 15 with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range $-10\ to +60\ ^{\circ}\text{C}$. No memory effect for maxima battery power. Rapid charger $100-240\ V$, 90 W. Rapid charger $100-240\ V$, 290 W, for shorter charging times, as accessory. Voltage supply $220-240\ V/21.6\ V$, 15A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.



The little one amongst the big. Only 3.3 kg.



Electrically monitored closing position of the tong retaining bolt.





Supply format

REMS Akku-Press 22V Connected Basic-Pack. Cordless radial press $32\,\text{kN}$ with selectable ACC drive mode, Connected functionality via Wi-Fi radio standard and OLED display, pressure monitoring and result display, for making pressipints \emptyset 10–108 (110) mm, \emptyset 3/–4". For driving REMS pressing tongs/pressing rings and other suitable makes of pressing tongs/pressing rings. Swivelling pressing tongs seat with automatic locking. Electrically monitored closing position of the tong retaining bolt. Electro-hydraulic drive with powerful, brushless, maintenance free 21.6 V, 400 W battery motor, robust planetary gear, eccentric piston pump and compact high-performance hydraulic system. Anti-vibration system. Safety tip switch. LED work lights. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 100–240V, 50–60 Hz, 90W.

Version	ArtNo.	€
In sturdy steel case.	576014R220	3.155,52
In L-Boxx system case.	576015R220	3.197,04

Other voltages on request.





Accessories

Description	ArtNo.	€
REMS pressing tongs/pressing rings see page 198-2	38.	
Adapter tongs for REMS pressing rings see page 238.		
REMS cropping tongs for threaded rods see page 241.		
REMS cable shear for electric cable see page 241.		
REMS Akku-Press 22 V Connected		
drive unit, without battery	576003R22	2.584,62
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A,		
for mains operation instead of battery Li-lon 21.6 V.	571567 R220	414,16
Steel case with inlay	571290R	110,03
L-Boxx system case with inserts	576345R	146,36
REMS Lumen 2800 22V, cordless LED flood light, see p	page 111	



REMS Akku-Press XL 45kN 22V ACC

Universal, powerful electric tool with automatic circuit control for producing XL pipe pressing joints for all common pressfitting systems. Thrust force 45 kN. Li-lon 22V Technology. For battery and corded operation.

Pipe pressing joints XL

Ø 64 – 108 mm

Ø 2½-4"

Complete range of REMS pressing rings XL for all common pressfitting systems, see page 198 – 238.

REMS Akku-Press XL 45 kN 22 V ACC – the powerful one with 45 kN thrust force. Pressing of Ø 64–108 mm in a single action. Anti-vibration system. Super fast, e.g. Geberit Mapress stainless steel Ø 108 mm in just 15 s. With automatic circuit control. Secure seating of adapter tongs by automatic locking.

Li-Ion 21.6 V, 5.0 Ah battery, for approx. 150 pressings Geberit Mapress stainless steel \emptyset 108.0 mm with one battery charge*.

Pressing rings XL for all common systems

Full range of REMS pressing rings XL for driving by REMS Akku-Press XL $45\,\text{kN}$ 22V ACC (page 198-238). Highly durable pressing rings XL made of tenacious, specially hardened special steel. Pressing contours of REMS pressing rings XL are system-specific and correspond to the respective pressfitting system. Thus perfect system conformity, safe press jointing.

Adapter tongs Z7 XL 45 kN

For driving REMS pressing rings XL by REMS Akku-Press XL 45 kN 22 V ACC adapter tongs Z7 XL 45 kN are required.

Design

Compact, robust, job site-proven. Small in size, slender design, drive unit with battery only 6.5 kg. Long working stroke for pressings in a single action. Super fast, e.g. Geberit Mapress stainless steel \emptyset 108 mm in just 15 s. Drive unit with inserted pressing tongs can be put down on the battery ready to pick up. Ergonomically designed housing and soft grips. LED work light for illuminating the work place. Machine status check. Swivelling pressing ring seat, rotation angle > 360 °. Secure seating of adapter tongs by automatic locking.

Anti-vibration system

Special drive technology with weight balancing and soft grips for low-vibration, fatigue-free pressing.

Pressing operation by touch-control with ACC

For reliable service, operating and functional safety. Automatic retraction after completion of pressing operation (automatic circuit control).

Drive

Enormous thrust and pressing force for fast and perfect press jointing. Thrust force 45 kN. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6V, 4.4 Ah batteries for approx. 130 pressings, 5.0 Ah batteries for approx. 150 pressings, 9.0 Ah for approx. 270 pressings Geberit Mapress stainless steel Ø 108.0 mm with one battery charge* Graduated charging status check by coloured LEDs. Operating temperature range - 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger $100-240\,\text{V},$ 90 W. Rapid charger $100-240\,\text{V},$ 290 W, for shorter charging times, as accessory. Voltage supply $220-240\,\text{V}/21.6\,\text{V},$ 40 A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.





German Quality Product







REMS Akku-Press XL 45 kN 22V ACC Basic-Pack Z7. Cordless radial press $45 \, \text{kN}$ with automatic circuit control for making press joints XL \emptyset $64-108 \, \text{mm}, \emptyset$ $21 - 4^\circ$. For driving REMS pressing rings XL. Swivelling pressing ring seat with automatic locking. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric dual-piston pump and compact high power hydraulic system. Anti-vibration system. Safety tip switch. LED work light. Battery Li-lon 21.6 V, $5.0 \, \text{Ah}$, rapid charger $100-240 \, \text{V}$, $50-60 \, \text{Hz}$, $90 \, \text{W}$. Adapter tongs $27 \, \text{XL} \, 45 \, \text{kN}$. In XL-Boxx system case.

•	ArtNo.	€
	579014R220	3.193.93

Other voltages on request.



Accessories

Description	ArtNo.	€
REMS Akku-Press XL 45 kN 22 V ACC drive unit, without battery	579001R22	2.065,62
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings 64.0 – 108.0 XL (PR-3S), 2½ – 4" XL (PR-3S), 2½ – 4" XL (PR-3B) with REMS Akku-Press XL 45 kN 22V ACC	579123 R	394,44

REMS pressing rings XL see page 198 – 238

Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100-240 V, 50-60 Hz, 90 W	571585R220	175,42
Rapid charger 100-240 V, 50-60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 40 A,		
for mains operation instead of battery Li-lon 21.6 V	571578R220	517,96
XL-Boxx system case with inserts	579601R	248,08
REMS Lumen 2800 22V, cordless LED flood light, see	page 111	



All prices excl. VAT *Ambient temperature approx. 20°C. 197

for all common pressfitting systems

Select REMS pressing tongs/ REMS pressing rings yourself!

Find the desired press fitting system in the table below and choose the size of pressing tongs/pressing rings that you require. Please note that pressfitting systems for gas installation may only be pressed with the pressing tongs/pressing rings which are highlighted in yellow in the table.

Highly durable pressing tongs/pressing rings made of tenacious, specially hardened special steel. Pressing contours of REMS pressing tongs/pressing rings are system-specific and correspond with the respective pressfitting system. Thus perfect system-conformity, safe press jointing. Pressing jaws of pressing tongs/ pressing rings manufactured on CNC production centres ensure high-precision machining of pressing contour. Low production tolerances as a result.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force or, if the system requires, by REMS Akku-Press XL 45 kN 22V ACC with 45 kN thrust force, see the table below. Adapter tongs (page 238) required for driving REMS (PR) pressing rings. All pressing tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press. All pressing rings S (PR-2B) marked with ** can also be driven with the manual radial press REMS Eco-Press (page 185) using the adapter tong Z8.

Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

REMS pressing tongs (PZ-2B)

REMS pressing tongs (PZ- $2\bar{B}$) with 2 swivellable monoblock pressing jaws. Most sold standard version. REMS ACz, Fz, RFz, RFlz, VMPz pressing tongs with teeth prevent formation of burr on the pressfitting (**Patent EP 2 027 971**).

REMS pressing tongs (PZ-4G)

REMS pressing tongs (PZ-4G) with two pivoted, parallel aligned pressing segments for linear pressing of midsize dimensions.

REMS pressing tongs (PZ-S)

REMS pressing tongs (S) with one fixed and two pivoted pressing segments, for midsize dimensions. REMS VMPz pressing tongs with teeth prevent formation of burr on the pressfitting.

REMS pressing rings (PR-3S)

REMS pressing ring (PR-3S) with 3 pressing segments, 2 swivel guided, for large dimension complex pressings. Ideal pressing through radially controlled movement of pressing segments. Adapter tongs required, see page 238.

REMS pressing rings (PR-3B)

REMS pressing rings (PR-3B) with 3 pressing segments for high quality, large dimension pressings Optimum pressing by radially controlled movement of the pressing segments. Adapter tongs required, see page 238. REMS VAUFz, VFz, VMPz, VUSFz pressing rings with teeth prevent formation of burr on the pressfitting.

REMS pressing ring (PR-2B)

REMS pressing ring (PR-2B) with 2 pressing jaws, for secure engagement of the pressing jaws in tight spaces, for midsize dimensions. Adapter tongs required for driving the REMS (PR-2B) pressing rings, see page 238.


REMS pressing ring S (PR-2B)

REMS pressing ring S (PR-2B), continuously swivellable, with 2 pressing jaws, for secure engagement of the pressing jaws in places of difficult access. Adapter tongs required for driving the REMS S (PR-2B) pressing rings, see page 238.

Traceability according to EN 1775:2007

REMS pressing tongs/pressing rings with pressing contour F, M, V, SA, B, RN and UP have worked a specific marking into the pressing contour which leaves a lasting impression on the pressed fitting after the pressing process. This enables the user to check again whether the most suitable pressing tongs or the suitable pressing ring have been used to make the pressfit connection even after the pressing process.

With this traceability REMS fulfils the recommendations of the European standard EN 1775:2007 for the installation of pressfitting systems for gas.





German Quality Product



REMS pressing tongs (PZ-2B)



REMS pressing tongs (PZ-4G)



REMS pressing tongs (PZ-S)




REMS pressing rings (PR-3S)



REMS pressing rings (PR-3B)



REMS pressing rings (PR-2B)




 $\begin{array}{l} \textbf{Hold-Harmless and Indemnification Agreement} \\ \textbf{See} \ page \ 240. \end{array}$









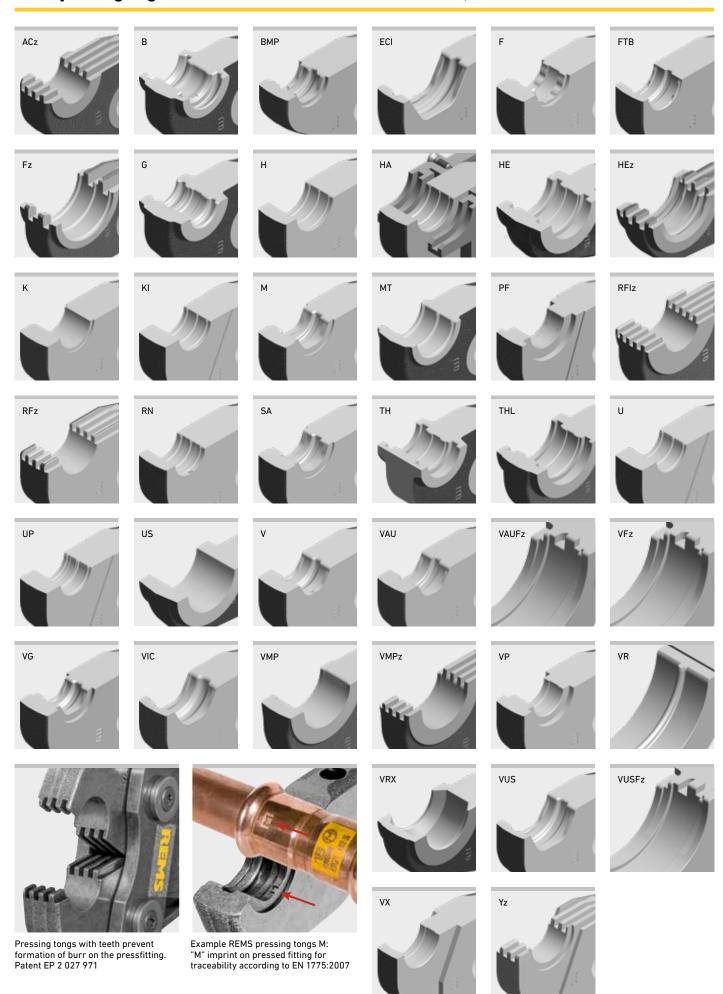

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	•
		Α		
Aalberts integrated	U 14*		570760	174,3
oiping systems /SH MultiPress	U 16* U 20*		570765 570775	174,33 174,33
ON MULLIFIESS	U 25*		570773	174,3
	U 32		570785	204,43
	U 40 TH 14*		570790 570455	249,01 186,31
	TH 16*		570460	186,3
	TH 20* TH 25*		570470 570495	186,33 186,33
	TH 32		570480	186,3
	TH 40		570485	246,9
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,5 645,5
	TH 14 S (PR-2B)**	Z8	574778 R	124,5
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,5 124,5
	TH 25 S (PR-2B)**	Z8	574792 R	124,5
-th-ot-Satemated	TH 32 S (PR-2B)	Z8	574798 R	136,9
alberts integrated iping systems	U 16 ²⁾ U 20 ²⁾		570765 570775	174,3 174,3
'SH MultiPress Gas ²⁾	U 25 ²⁾		570780	174,3
	TH 16 ²⁾ TH 20 ²⁾		570460 570470	186,3 186.3
	TH 16 S (PR-2B) ²⁾	Z8	574782 R	124,5
	TH 20 S (PR-2B) ²⁾	Z8	574788 R	124,5
alberts integrated iping systems	V 12 V 15		570107 570115	154,6 154,6
'SH SudoPress Carbon			570125	154,6
	V 22		570135	154,6
	V 28 V 35		570145 570155	154,6 154,6
	V 42		570165	360,1
	V 42 (PR-2B)	72	572850 R	322,7
	V 54 V 54 (PR-2B)	72	570175 572851 R	370,5 348,7
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,4
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,4 1.355,5
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,5
	V 12 S (PR-2B)	Z8	574748 R	124,5
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,5 124,5
	V 22 S (PR-2B)	Z8	574758 R	124,5
	V 28 S (PR-2B)	Z8	574760 R	124,5
lalberts integrated	V 35 S (PR-2B) V 12	Z8	574762 R 570107	136,90 154,6
iping systems	V 14		570112	154,6
'SH SudoPress Copper	VG 14 V 15		570132 570115	154,6° 154,6°
	V 16		570117	154,6
	VG 16		570137	154,6
	V 18 V 22		570125 570135	154,6 154,6
	V 28		570145	154,6
	V 35		570155	154,6
	V 42 V 42 (PR-2B)	Z2	570165 572850 R	360,1 322,7
	V 54		570175	370,5
	V 54 (PR-2B) V 12 S (PR-2B)	Z2 Z8	572851 R 574748 R	348,73 124.5
	V 14 S (PR-2B)	Z8	574746 K 574800 R	124,5
	VG 14 S (PR-2B)	Z8	574750 R	124,5
	V 15 S (PR-2B) VG 16 S (PR-2B)	Z8 Z8	574752 R 574754 R	124,5 124,5
	V 16 S (PR-2B)	Z8	574802 R	124,5
	V 18 S (PR-2B)	Z8	574756 R	124,5
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,5 124,5
	V 35 S (PR-2B)	Z8	574762 R	136,9
alberts integrated	V 12		570107	154,6
iping systems 'SH SudoPress Copper	V 14 VG 14		570112 570132	154,6 154,6
ias	V 15		570115	154,6
	V 16		570117	154,6
	VG 16 V 18		570137 570125	154,6 154,6
	V 22		570135	154,6
	V 28 V 35		570145 570155	154,6 154,6
	V 42		570165	360,1
	V 42 (PR-2B)	72	572850 R	322,7
	V 54 V 54 (PR-2R)	72	570175 572851 R	370,5
	V 54 (PR-2B) V 12 S (PR-2B)	Z2 Z8	572851 R 574748 R	348,7 124,5
	V 14 S (PR-2B)	Z8	574800 R	124,5
	VG 14 S (PR-2B)	Z8 78	574750 R	124,5
	V 15 S (PR-2B) VG 16 S (PR-2B)	Z8 Z8	574752 R 574754 R	124,5° 124,5°
	V 16 S (PR-2B)	Z8	574802 R	124,5
	V 18 S (PR-2B)	Z8	574756 R	124,5
	V 22 C (DD 2D)			
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,5° 124,5°

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Aalberts integrated	V 15		570115	154,61
piping systems VSH SuoPress	V 18 V 22		570125 570135	154,61 154,61
Stainless	V 28 V 35		570145	154,61 154,61
	V 42		570155 570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 V 54 (PR-2B)	72	570175 572851 R	348,72
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
Aalberts integrated	M 12		570100	154,61
piping systems VSH XPress Carbon	M 15 M 18 ¹⁾		570110 570120	154,61 154,61
	M 22		570130	154,61
	M 28 ¹⁾ M 35		570140 570150	154,61 154,61
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G) M 42 (PR-3S)	72	570170 572706 R	498,19 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	XP 66,7 XL (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R 579101 R	1.161,47 1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 12 S (PR-2B)	Z8 ZE 7 Z7 XE 43 KN *	574736 R	124,51
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Aalberts integrated	M 12	20	570100	154,61
piping systems VSH XPress Copper	M 15 M 18 ¹⁾		570110 570120	154,61 154,61
Ton XI 1000 dopper	M 22		570130	154,61
	M 28 ¹⁾ M 35		570140 570150	154,61 154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S) XP 64,0 XL (PR-3S)	Z2 Z6 XL³) / Z7 XL 45 kN⁴)	572708 R 579100 R	672,57 1.056,63
	XP 66,7 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579108 R	1.161,47
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	XP 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579109 R	1.355,58
	M 12 S (PR-2B) M 15 S (PR-2B)	Z8 Z8	574736 R 574738 R	124,51 124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
Aalberts integrated	M 35 S (PR-2B) M 15	Z8	574746 R 570110	136,96 154,61
piping systems	M 18 ¹⁾		570110	154,61
VSH XPress Copper Gas	M 22 M 28 ¹⁾		570130 570140	154,61 154,61
Uds	M 35		570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	Z2 Z2	572706 R 572708 R	672,57 672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
Aalberts integrated	M 35 S (PR-2B) M 15	Z8	574746 R 570110	136,96 154,61
piping systems	M 18 ¹⁾		570120	154,61
VSH XPress Stainless	M 22 M 28 ¹⁾		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PZ-4G) M 54 (PZ-4G)		570160 570170	498,19 498,19
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S) M 76,1 XL (PR-3S)	Z2 Z6 XL³) / Z7 XL 45 kN⁴)	572708 R 579101 R	672,57 1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S) M 15 S (PR-2B)	Z8	579111 R 574738 R	1.355,58 124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
Aalberts integrated	M 35 S (PR-2B) M 15	Z8	574746 R 570110	136,96 154,61
piping systems	M 18 ¹⁾		570120	154,61
VSH XPress Stainless Gas	M 22 M 28 ¹⁾		570130 570140	154,61 154,61
- 00	M 35		570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	Z2 Z2	572706 R 572708 R	672,57 672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96

System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	€
AC-FIX PRESS	H 12*		570300	168,10	AHLSELL	V 12		570107	154,61
(Global Piping	H 16*		570320	168,10	A-press	V 15 V 18		570115	154,61
Systems)	H 20*		570350	168,10	elförzinkad V	V 22		570125 570135	154,61 154,61
	H 25* H 32		570360 570380	168,10 168,10		V 28		570145	154,61
	RFz 12*		571320	194,05		V 35		570155	154,61
	RFz 16*		571325	194,05		V 42		570165	360,13
	RFz 20*		571330	194,05		V 54 V 12 S (PR-2B)	Z8	570175 574748 R	370,51
	RFz 25		571335	194,05		V 12 S (PR-2B)	Z8	574746 R 574752 R	124,51 124,51
	RFz 32		571340	194,05		V 18 S (PR-2B)	Z8	574756 R	124,51
	U 16*		570765	174,33		V 22 S (PR-2B)	Z8	574758 R	124,51
	U 20*		570775	174,33		V 28 S (PR-2B)	Z8	574760 R	124,51
	U 25* U 32		570780 570785	174,33 204,43	AHLSELL	V 35 S (PR-2B) M 12	Z8	574762 R 570100	136,96
	VX 16*		571635	214,43	A-press koppar M	M 15		570110	154,61 154,61
	VX 20*		571640	214,81	A press koppur	M 18		570120	154,61
AC-FIX PRESS DUO	RFz 16*		571325	194,05		M 22		570130	154,61
(Global Piping	RFz 20*		571330	194,05		M 28		570140	154,61
Systems)	RFz 25		571335	194,05		M 35	70	570150	154,61
	RFz 32		571340	194,05		M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
	TH 16*		570460	186,32		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	TH 20*		570470	186,32		M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	TH 25* TH 26*		570495 570475	186,32 186,32		M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	TH 32		570475	186,32		M 15 S (PR-2B)	Z8	574738 R	124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		M 28 S (PR-2B)	Z8	574744 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51		M 35 S (PR-2B)	Z8	574746 R	136,96
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	AHLSELL	V 12		570107	154,61
	TH 32 S (PR-2B)	Z8	574798 R	136,96	A-press koppar V	V 15		570115	154,61
	U 16*		570765	174,33		V 18 V 22		570125 570135	154,61 154,61
	U 20*		570775	174,33		V 28		570145	154,61
	U 25* U 32		570780 570785	174,33 204,43		V 35		570155	154,61
AC-FIX PRESS-MULT			570320	168,10		V 42		570165	360,13
(Global Piping	H 18*		570340	168,10		V 54	70	570175	370,51
Systems)	H 20*		570350	168,10		V 12 S (PR-2B) V 15 S (PR-2B)	Z8 Z8	574748 R 574752 R	124,51 124,51
	H 25*		570360	168,10		V 18 S (PR-2B)	Z8	574756 R	124,51
	H 32		570380	168,10		V 22 S (PR-2B)	Z8	574758 R	124,51
	RFz 16*		571325	194,05		V 28 S (PR-2B)	Z8	574760 R	124,51
	RFz 20*		571330	194,05	AULOFLI	V 35 S (PR-2B)	Z8	574762 R	136,96
	RFz 25 RFz 32		571335 571340	194,05 194,05	AHLSELL A-press rostfritt	M 15 M 18		570110 570120	154,61 154,61
	U 16*		570765	174,03	A pressiostiliti	M 22		570130	154,61
	U 18*		570770	174,33		M 28		570140	154,61
	U 20*		570775	174,33		M 35		570150	154,61
	U 25*		570780	174,33		M 42 (PR-3S)	72 72	572706 R	672,57
	U 32		570785	204,43		M 54 (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	572708 R 579101 R	672,57 1.161,47
ACOME MT	ACz 12*		572642	194,05		M 88,9 G XL (PR-3S)	Z6 XL 7 Z7 XL 45 kN ⁴	579110 R	1.355,58
	ACz 16*		572644	194,05		M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58
	ACz 20* ACz 25		572646 572648	194,05 194,05		M 15 S (PR-2B)	Z8	574738 R	124,51
AHLSELL	M 12		570100	154,61		M 18 S (PR-2B)	Z8	574740 R	124,51
A-press	M 15		570110	154,61		M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
elförzinkad M	M 18		570120	154,61		M 35 S (PR-2B)	Z8	574744 R	136,96
	M 22		570130	154,61	AIRBEL	M 15		570110	154,61
	M 28		570140	154,61	PRESSCLIM	M 18		570120	154,61
	M 35		570150	154,61		M 22		570130	154,61
	M 42 (PR-3S)	72	572706 R	672,57		M 28 M 35		570140 570150	154,61 154,61
	M 54 (PR-3S)	72 71 31 777 71 751 NA	572708 R	672,57		M 42 (PR-3S)	Z2	572706 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		M 54 (PR-3S)	72	572708 R	672,57
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 KN4)	579110 R 579111 R	1.355,58 1.355,58		M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,47
	M 12 S (PR-2B)	Z8 Z8	574736 R	124,51		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51		M 108,0 G XL (PR-3S) M 15 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579111 R 574738 R	1.355,58 124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51		M 18 S (PR-2B)	Z8	574736 K 574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51		M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51		M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96		M 35 S (PR-2B)	Z8	574746 R	136,96

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- $^{\scriptscriptstyle 3)}\,$ Driven by REMS Power-Press XL ACC, see page 188.
- $^{\mbox{\tiny 4)}}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}\;$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{10)}$ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\ensuremath{\ensuremath{\mathcal{V}}}$ " G" on the pressing jaws for gas installations.
- 12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

 $See \ page \ 238 \ for \ adapter \ tongs. \ Pressing \ tongs/pressing \ rings \ for \ additional \ pressfitting \ systems \ on \ request.$

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	•
IRBEL	M 15		570110	154,6
ERTINOX	M 18		570120	154,6
	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PR-3S)	72	572706 R	672,5
	M 54 (PR-3S)	72	572708 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,4
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,5
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,5
	M 15 S (PR-2B)	Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
_B	TH 16*		570460	186,3
stema Multicapa	TH 18*		570465	186,3
ara calefacción y	TH 20*		570470	186,3
nitario	TH 26*		570475	186,3
	TH 32		570480	186,3
	TH 40		570485	246,9
	TH 50 (PZ-S)		572400	645,5
	TH 63 (PZ-S)		572405	645,5
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 18 S (PR-2B)**	Z8	574786 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574700 R	124,5
	TH 32 S (PR-2B)	Z8	574774 R	136.9
	H 16*	LU	574776 K	168,1
	H 18*		570340	168,1
	H 20*		570350	168,1
	H 26*		570370	168,1
	H 32		570380	168,1
	H 40 (PZ-4G)		570390	565,6
	U 16*		570765	174,3
	U 18*		570770	174,3
	U 20*		570775	174,3
	U 26* 12)		570750	204,4
	U 32		570785	204,4
	U 40		570790	249,0
LB	TH 16*		570460	186,3
istema Multicapa	TH 20*		570470	186,3
ara Gas	TH 26*		570475	186,3
	TH 32		570480	186,3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
	H 16*	20	570320	168,1
	H 20*		570350	168,1
	H 26*		570370	168,1
	H 32		570380	168,1
	U 16*		570765	174,3
	U 20*		570775	174,3
	U 26* 12)			204,4
	U 32		570750	
TEOU ALL			570785	204,4
TECH Altech	RFz 12*		571320	194,0
	RFz 16*		571325	194,0
	RFz 20*		571330	194,0
	RFz 25		571335	194,0
PE MULTYGAS	TH 16*		570460	186,3
erie AP Gas	TH 20*		570470	186,3
	TH 26*		570475	186,3
	TH 32		570480	186,3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
PE Serie AP	B 16*		570850	203,4
	B 20*		570860	203,4
	B 26		570870	224,1
	B 32		570880	224,1
	H 16*		570320	168,1
	H 20*		570350	168,1
	H 26*		570370	168,1
	H 32		570380	168,1
	TH 16*		570460	186,3
	TH 18*		570465	186,3
	TH 20*		570470	186,3
	TH 26*			
			570475 570480	186,3
	TH 32	70	570480	186,3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 18 S (PR-2B)**	Z8	574786 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
			FROR/F	17/ 0
	U 16*		570765	174,3

APE Serie APL	H 16* H 18* H 20* H 25* H 26* H 32 TH 16* TH 18* TH 20* TH 25* TH 26* TH 25*		570320 570340 570350 570360 570370 570380 570460 570465 570470 570495	168,10 168,10 168,10 168,10 168,10 168,32 186,32 186,32
	H 25* H 26* H 32 TH 16* TH 18* TH 20* TH 25* TH 26* TH 26* TH 32		570360 570370 570380 570460 570465 570470	168,10 168,10 168,10 186,32 186,32
	H 26* H 32 TH 16* TH 18* TH 20* TH 25* TH 25* TH 32		570370 570380 570460 570465 570470	168,10 168,10 186,32 186,32
	H 32 TH 16* TH 18* TH 25* TH 25* TH 26* TH 32		570380 570460 570465 570470	168,10 186,32 186,32
	TH 18* TH 20* TH 25* TH 26* TH 32		570465 570470	186,32
	TH 20* TH 25* TH 26* TH 32		570470	
	TH 26* TH 32		570495	
	TH 32		570475	186,32 186,32
			570480	186,32
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Z8 Z8	574782 R 574786 R	124,51 124.51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574792 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16* U 18*		570765 570770	174,33 174,33
	U 20*		570775	174,33
AQUATECHNIK Press-fitting metal	H 16* H 20*		570320 570350	168,10 168,10
ress ritting metat	H 26*		570370	168,10
	H 32 TH 16*		570380 570460	168,10 186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
	U 16*		570765	174,33
	U 20* U 26* 12)		570775 570750	174,33 204,43
	U 32		570785	204,43
AQUATECHNIK Universal	B 16* B 20*		570850 570860	203,40 203,40
	B 26		570870	224,16
	B 32 F 16*		570880 570717	224,16 177,45
	F 20*		570727	177,45
	F 26* F 32		570730 570735	191,98 191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)** F 26 S (PR-2B)**	Z8 Z8	574730 R 574732 R	124,51 124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16* H 20*		570320 570350	168,10 168,10
	H 26*		570370	168,10
	H 32 TH 16*		570380 570460	168,10 186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16* U 20*		570765 570775	174,33 174,33
	U 26* 12)		570750	204,43
ARKA	U 32 H 16*		570785 570320	204,43 168,10
DUROsystem	H 20*		570350	168,10
	H 25* H 26*		570360	168,10 168,10
	H 32		570370 570380	168,10
	TH 16*		570460	186,32
	TH 20* TH 25*		570470 570495	186,32 186,32
	TH 26*		570475	186,32
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574792 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765 570775	174,33 174,33
	U 20*		570110	154,61
Aschl NIR	U 20* M 15			
Aschl NIR	M 15 M 18		570120	154,61 154,61
Aschl NIR	M 15 M 18 M 22 M 28		570120 570130 570140	154,61 154,61
Aschl NIR	M 15 M 18 M 22 M 28 M 35	72	570120 570130 570140 570150	154,61 154,61 154,61
Aschl NIR	M 15 M 18 M 22 M 28	72 72	570120 570130 570140	154,61 154,61
Aschl NIR	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S)	Z2 Z6 XL³) / Z7 XL 45 kN⁴)	570120 570130 570140 570150 572706 R 572708 R 579101 R	154,61 154,61 154,61 672,57 672,57 1.161,47
Aschl NIR	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S)	72	570120 570130 570140 570150 572706 R 572708 R	154,61 154,61 154,61 672,57
Aschl NIR	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76.1 XL (PR-3S) M 88.9 G XL (PR-3S) M 108.0 G XL (PR-3S) M 108.0 G XL (PR-3S)	72 76 XL ³⁾ / 77 XL 45 kN ⁴⁾ 76 XL ³⁾ / 77 XL 45 kN ⁴⁾ 76 XL ³⁾ / 77 XL 45 kN ⁴⁾ 78	570120 570130 570140 570150 572706 R 572708 R 579101 R 579110 R 579111 R 574738 R	154,61 154,61 154,61 672,57 672,57 1.161,47 1.355,58 1.355,58
Aschl NIR	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z2 Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	570120 570130 570140 570150 572706 R 572708 R 579101 R 579111 R	154,61 154,61 154,61 672,57 672,57 1.161,47 1.355,58 1.355,58
Aschl NIR	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S) M 15 S (PR-2B) M 18 S (PR-2B)	Z2 Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8 Z8	570120 570130 570140 570150 572706 R 572708 R 579101 R 579110 R 579111 R 574738 R 574740 R	154,61 154,61 154,61 672,57 672,57 1.161,47 1.355,58 1.355,58 124,51

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	•
ASSOTHERM	M 15		570110	154,6
PC-RAC	M 18		570120	154,6
Carbon Steel	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PZ-4G)		570160	498,1
	M 54 (PZ-4G)	70	570170	498,1
	M 42 (PR-3S)	72	572706 R	672,5
	M 54 (PR-3S)	72	572708 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,4
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,5
	M 108,0 G XL (PR-3S)	Z8 Z8	574738 R	1.355,5 124,5
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8	574736 K 574740 R	124,5
	M 22 S (PR-2B)	Z8	574740 R 574742 R	124,5
		Z8		124,5
	M 28 S (PR-2B)	Z8	574744 R 574746 R	136,9
CCOTHEDM	M 35 S (PR-2B)	20		154.6
ASSOTHERM PI-rax	M 15 M 18		570110 570120	154,6
NOX	M 22		570130	154,6
IIUX	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PZ-4G)		570160	498.1
	M 54 (PZ-4G)		570170	498,1
	M 42 (PR-3S)	Z2	572706 R	672,5
	M 54 (PR-3S)	72	572708 R	672.5
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,4
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	577101 R	1.355,5
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,5
	M 15 S (PR-2B)	Z8 Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
ASSOTHERM	M 15		570110	154.6
PI-RAX	M 18		570120	154,6
nox Gas	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PZ-4G)		570160	498,1
	M 54 (PZ-4G)		570170	498,1
	M 42 (PR-3S)	Z2	572706 R	672,5
	M 54 (PR-3S)	Z2	572708 R	672,5
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.161,4
	M 88,9 G XL (PR-3S)7)	Z7 XL 45 kN ⁴⁾	579110 R	1.355,5
	M 108,0 G XL (PR-3S)7)	Z7 XL 45 kN ⁴⁾	579111 R	1.355,5
	M 15 S (PR-2B)	Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
ASSOTHERM	H 16*		570320	168,1
PM-Multistrato	H 20*		570350	168,1
	H 26*		570370	168,1
	H 32		570380	168,1
	TH 16*		570460	186,3
	TH 20*		570470	186,3
	TH 26*		570475	186,3
	TH 32		570480	186,3
	THL 32		570487	186,3
	TH 40		570485	246,9
	TH 50 (PZ-S)		572400	645,5
	TH 63 (PZ-S)		572405	645,5
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
	U 16*		570765	174,3
	U 20*		570775	174,3
	U 26* 12)		570750	204,4
	U 32		570785	204.4

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
ASSOTHERM	M 15		570110	154,61
IPR-RRA	M 18		570120	154,61
Copper	M 22 M 28		570130 570140	154,61 154.61
	M 35		570150	154,61
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	7/ 2/3/ / 77 2/ / 51 8/4	572708 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
ASSOTHERM	M 35 S (PR-2B) M 15	Z8	574746 R 570110	136,96 154,61
IPR-RRA	M 18		570110	154,61
Copper Gas	M 22		570130	154,61
• •	M 28		570140	154,61
	M 35		570150	154,61
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51 124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51
	M 35 S (PR-2B)	Z8	574744 R	136,96
ASTM F 1807	US 3/8"*		571450	211,70
(Fittings with	US 1/2"*		571455	211,70
Copper Crimp	US 3/4"*		571460	211,70
Ring for PEX tubing)	US 1"*		571465	211,70
	US 1 1/4" US 1 1/2"		571470 571475	211,70 211,70
	US 2"		571477	285,40
ATUSA ITALIA	M 15		570110	154,61
INSTALPRESS	M 18		570120	154,61
CARBON STEEL	M 22		570130	154,61
PRESS FITTINGS	M 28		570140	154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574742 R 574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
ATUSA ITALIA	M 15		570110	154,61
INSTALPRESS	M 18		570120	154,61
STAINLESS STEEL	M 22		570130	154,61
PRESS FITTINGS	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574742 R 574744 R	124,51
	M 35 S (PR-2B)	Z8	574744 R	136,96
AUSTEC	TH 16*		570460	186,32
PEX-B, PEX-AL-PEX	TH 20*		570470	186,32
(AUS)	TH 25*		570495	186,32
	TH 32		570480	186,32 174,33
	U 16* U 20*		570765 570775	174,33
	U 25*		570780	174,33
	11 22		E7070E	20/ /2

570785

204,43

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

U 32

- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- $^{\scriptscriptstyle 3)}\,$ Driven by REMS Power-Press XL ACC, see page 188.
- $^{\mbox{\tiny 4)}}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}$ For making press joints for operating pressure \leq PN 10.
- $^{9)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{10)}$ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\ensuremath{\ensuremath{\mathcal{V}}}$ " G" on the pressing jaws for gas installations.
- 12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	•
AUSTEC	TH 16*	,	570460	186,32
PEX-AL-PEX GAS (AUS)	TH 20* TH 25*		570470 570495	186,32 186,32
(AUS)	TH 32		570480	186,32
	U 16*		570765	174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 32		570785	204,43
AYOR	H 12*		570300	168,10
FIXOCONNECT Press	H 16* H 20*		570320 570350	168,10 168,10
1633	H 25*		570360	168,10
	RFz 12*		571320	194,05
	RFz 16* RFz 20*		571325 571330	194,05 194,05
	RFz 25		571335	194,05
	U 16*		570765	174,33
	U 20* U 25*		570775 570780	174,33
AYOR	H 16*		570320	174,33 168,10
IXOMULTIX	H 20*		570350	168,10
	H 26* H 32		570370	168,10
	H 32 TH 16*		570380 570460	168,11 186,3
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16* U 20*		570765 570775	174,33 174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50 U 63 (PR-3B)	Z4	570795 572837 R	298,89 733,81
	U 63 (PZ-S)	24	572365	645,58
	U 75 (PR-3B)	Z4	572828 R	645,58
YOR Omatherm	H 16* H 20*		570320 570350	168,10
OR YOU -1	H 26*		570370	168,10 168,10
	TH 16*		570460	186,33
	TH 20*		570470	186,32
	TH 26* TH 16 S (PR-2B)**	Z8	570475 574782 R	186,32 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	U 16* U 20*		570765 570775	174,33 174,33
AYOR	H 12*		570300	168.10
SOMATHERM	H 16*		570320	168,10
FOR YOU -2	H 20*		570350	168,10
	H 25* RFz 12*		570360 571320	168,10 194,05
	RFz 16*		571325	194,05
	RFz 20*		571330	194,05
	RFz 25 U 16*		571335	194,05
	U 20*		570765 570775	174,33 174,33
	U 25*		570780	174,33
		В		
Bampi BALPEX	TH 16*		570460	186,32
serie LP	TH 18* TH 20*		570465 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,91 645,51
	TH 63 (PZ-S)		572405	645,5
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574786 R 574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5° 124,5°
	TH 32 S (PR-2B)	Z8	574798 R	136,9
	U 16*		570765	174,3
	U 18* U 20*		570770 570775	174,3 174,3
	U 26* ¹²⁾		570750	204,4
	U 32		570785	204,4
	U 40		570790	249,0
	U 50 U 63 (PR-3B)	Z 4	570795 572837 R	298,8 733,8
	U 63 (PZ-S)		572365	645,5
ampi BALPEX	TH 16*		570460	186,3
erie MP	TH 18*		570465	186,3
	TH 20* TH 26*		570470 570475	186,3 186,3
	TH 32		570475 570480	186,3
			570485	246,9
	TH 40		070400	240,7
	TH 40 TH 50 (PZ-S)		572400	645,5
	TH 40 TH 50 (PZ-S) TH 63 (PZ-S)	70	572400 572405	645,5 645,5
	TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 16 S (PR-2B)**	Z8 Z8	572400 572405 574782 R	645,58 645,58 124,5
	TH 40 TH 50 (PZ-S) TH 63 (PZ-S)	Z8 Z8 Z8 Z8	572400 572405	645,58 645,58 124,51 124,51

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Bampi BALPEX Gas	TH 16* TH 20*		570460 570470	186,32 186,32
UdS	TH 26*		570475	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
BARBI EASYPRESS (Industrial Blansol)	H 12* H 16*		570300 570320	168,10 168,10
(illuusti lat Dialisot)	H 20*		570350	168,10
	H 25* H 32		570360 570380	168,10 168,10
	RFz 12*		571320	194,05
	RFz 16* RFz 20*		571325 571330	194,05
	RFz 25		571335	194,05 194,05
	RFz 32 U 16*		571340 570765	194,05 174.33
	U 20*		570775	174,33
	U 25* U 32		570780 570785	174,33 204,43
BARBI MULTIPEX	H 14*		570310	168,10
(Industrial Blansol)	H 16* H 18*		570320 570340	168,10 168,10
	H 20*		570350	168,10
	H 25* H 26*		570360	168,10
	H 32		570370 570380	168,10 168,10
	RFz 16* RFz 18*		571325 571327	194,05 194.05
	RFz 20*		571327	194,05
	RFz 25		571335 571340	194,05
	RFz 32 TH 16*		570460	194,05 186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16* U 18*		570765 570770	174,33 174,33
	U 20*		570775	174,33
	U 25* U 32		570780 570785	174,33 204,43
	U 40		570790	249,07
	U 50 U 63 (PR-3B)	Z 4	570795 572837 R	298,89 733,81
	U 63 (PZ-S)		572365	645,58
BEGETUBE/ IVAR	B 14* B 16*		570845 570850	203,40 203,40
	B 18*		570855	203,40
	B 20* B 26		570860 570870	203,40 224,16
	B 32		570880	224,16
	Fz 40 Fz 50		570742 570747	205,47 311,35
	F 63 (PZ-S)		572385	645,58
Béné inox	Fz 75 (PR-3B) M 15	74	572830 R 570110	609,25 154,61
Série 41	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	Z2 Z2	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
Brass Form	M 35 S (PR-2B) H 16*	Z8	574746 R 570320	136,96 168,10
Master-Al-Pex	H 18*		570340	168,10
	H 20* TH 16*		570350	168,10 186,32
	TH 18*		570460 570465	186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574786 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R	124,51 136,96
	U 16*	20	574798 R 570765	174,33
	U 18*		570770	174,33
Brass & Fittings	U 20* RFz 16*		570775 571325	174,33 194,05
PRESSMAN MultiPress	RFz 18*		571327	194,05
	ACz 20* RFz 25		572646 571335	194,05 194,05
	NI Z ZJ			194,05
D 0 F'	RFz 32		571340	
Brass & Fittings PRESSMAN RetiPress			571340 571325 571327	194,05 194,05
	RFz 32 RFz 16*		571325	194,05

Driven by

Art.-No.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs/ pressing rings
BRASSTECH	B 16*		570850	203,40	CHIALI	TH 16*
MULTItermoSAN	B 20*		570860	203,40	CHIALIPEX	TH 20*
Brasspress	B 26		570870	224,16		TH 26*
	B 32		570880	224,16		TH 32
	F 16*		570717	177,45		TH 40
	F 20*		570727	177,45		TH 50 (PZ-S)
	F 26*		570730	191,98		TH 63 (PZ-S)
	F 16 S (PR-2B)**	Z8	574728 R	124,51	Climatrix	H 16*
	F 20 S (PR-2B)**	Z8	574730 R	124,51	Climatrix Rhinopex	H 20*
	F 26 S (PR-2B)**	Z8	574732 R	124,51	Cumatrix Killiopex	
	H 16*		570320	168,10		U 16*
	H 18*		570340	168,10		U 20*
	H 20*		570350	168,10		U 26* 12)
	H 26*		570370	168,10		TH 14*
	TH 16*		570460	186,32		TH 16*
	TH 18*		570465	186,32		TH 18*
	TH 20*		570470	186,32		TH 20*
	TH 26*		570475	186,32		TH 26*
	TH 32		570480	186,32		TH 32
	TH 40		570485	246,99		TH 16 S (PR-2B)**
	TH 50 (PZ-S)		572400	645,58		TH 20 S (PR-2B)*
	TH 63 (PZ-S)		572405	645,58		
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		TH 26 S (PR-2B)**
	TH 18 S (PR-2B)**	Z8	574786 R	124,51		TH 32 S (PR-2B)
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	Climatrix	TH 11,6*
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	Variotherm	TH 16*
	TH 32 S (PR-2B)	Z8	574798 R	136,96	System TH	TH 16 S (PR-2B)*
	U 16*		570765	174,33	ClouSet	TH 16*
	U 18*		570770	174,33		TH 18*
	U 20*		570775	174,33		TH 20*
	U 26* 12)		570750	204,43		TH 16 S (PR-2B)**
	U 32		570785	204,43		TH 18 S (PR-2B)*
						TH 20 S (PR-2B)**
		C			C	RFz 12*
		•			Comap	
Cello Products	VUS 1/2" (OD 15.9 mm)		571770	186.79	PEX Press	RFz 16*
>B< Press	VUS 3/4" (OD 22,2 mm)		571775	186,79		RFz 20*
	VUS 1" (OD 28,6 mm)		571780	186,79		RFz 25
	VUS 11/4" (OD 34,9 mm)		571785	186,79	Comap	TH 14*
	VUS 1½" (OD 41,3 mm)		571790	360,13	Multiskin	TH 16*
	VUS 2" (OD 54,0 mm)		571795	370,51		TH 18*
CGR	H 16*		570320	168,10		TH 20*
DYNAFLU	H 20*		570350	168,10		TH 26*
multicouche	H 26*		570370	168,10		TH 32
	H 32		570380	168.10		THL 32
	TH 16*		570460	186,32		TH 40
	TH 20*		570470	186,32		TH 50 (PZ-S)
	TH 26*		570475	186,32		
	TH 32		570473	186,32		TH 63 (PZ-S)
	TH 40		570485	246,99		THz 75 (PR-3B)
	TH 50 (PZ-S)		572400	645,58		TH 16 S (PR-2B)*
	TH 63 (PZ-S)		572405	645,58		TH 20 S (PR-2B)*
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		TH 26 S (PR-2B)*
		Z8				TH 32 S (PR-2B)
	TH 20 S (PR-2B)**		574788 R	124,51		U 14*
	TH 26 S (PR-2B)**	Z8 Z8	574794 R	124,51		U 16*
	TH 32 S (PR-2B)	40	574798 R	136,96		U 18*
	U 16*		570765	174,33		0.18.

System	pressing rings	adapter tongs	ArtNo.	E
CHIALI	TH 16*		570460	186,32
CHIALIPEX	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
Climatrix	H 16*		570320	168,10
Climatrix Rhinopex	H 20*		570350	168,10
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 26* 12)		570750	204,43 186,32
	TH 14* TH 16*		570455 570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
Climatrix	TH 11,6*		570482	186,32
Variotherm	TH 16*		570460	186,32
System TH	TH 16 S (PR-2B)**	Z8	574782 R	124,51
ClouSet	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
Comap	RFz 12*		571320	194,05
PEX Press	RFz 16*		571325	194,05
	RFz 20*		571330	194,05
_	RFz 25		571335	194,05
Comap Multiskin	TH 14*		570455	186,32
MULLISKIN	TH 16*		570460	186,32
	TH 18* TH 20*		570465 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	THL 32		570487	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	THz 75 (PR-3B)	Z4	572829 R	609,25
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 14*		570760	174,33
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50	7/	570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
	U 63 (PZ-S)	7/	572365	645,58
	U 75 (PR-3B)	Ζ4	572828 R	645,58
	H 14*		570310	168,10
	H 16*		570320	168,10
	H 18*		570340 570350	168,10
	H 20*		570350 570370	168,10
	H 26* H 32		570370 570380	168,10 168,10
	H 40 (PZ-4G)		570390	565,67
	70 (12 70)		0,00,0	000,07

571335 Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

570775

570750

570785

570790

570795

572365

570300

570320

570350

570360

571320

571325

571330

572837 R

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

174,33

204.43 204,43

249,07

298.89

733,81

645.58

168.10

168,10

168,10

194.05

194,05

194,05

²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.

Z4

- Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.

U 26* 12)

U 32

U 40

U 50

H 12*

H 20°

H 25*

RFz 12*

RFz 16*

RFz 20*

CGR

PER

DYNAFLU

U 63 (PR-3B)

U 63 (PZ-S)

- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- 12) Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Comap Multiskin Gas	TH 16* TH 20*		570460 570470	186,32 186,32
Piattiokiii oas	TH 26*		570475	186,32
	TH 32 THL 32		570480 570487	186,32 186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,96 174,33
	U 20* U 32		570775 570785	174,33 204,43
	H 16*		570320	168,10
	H 20* H 26*		570350 570370	168,10 168,10
COMISA	H 32 TH 14*		570380 570455	168,10 186,32
Press System	TH 16*		570460	186,32
	TH 18* TH 20*		570465 570470	186,32 186,32
	TH 25* TH 26*		570495 570475	186,32 186,32
	TH 32		570480	186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58
	TH 63 (PZ-S)	Z8	572405	645,58
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Z8	574782 R 574786 R	124,51 124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) H 14*	Z8	574798 R 570310	136,96 168,10
	H 16* H 18*		570320 570340	168,10 168,10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	B 14*		570845	203,40
	B 16* B 18*		570850 570855	203,40 203,40
	B 20* B 26		570860 570870	203,40 224,16
2014104	B 32		570880	224,16
COMISA Press System Gas	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
CONEL	TH 32 S (PR-2B) M 15	Z8	574798 R 570110	136,96 154,61
CONNECT INOX	M 18		570120	154,61
	M 22 M 42 (PR-3S)	72	570130 572706 R	154,61 672,57
	M 54 (PR-3S) V 15	72	572708 R 570115	672,57
	V 18		570125	154,61 154,61
	V 22 V 42 (PR-2B)	72	570135 572850 R	154,61 322,77
CONFI	V 54 (PR-2B)	72	572851 R	348,72
CONEL CONNECT	F 16* F 20*		570717 570727	177,45 177,45
MULTI	F 26* F 32		570730 570735	191,98 191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)** F 26 S (PR-2B)**	Z8 Z8	574730 R 574732 R	124,51 124,51
	F 32 S (PR-2B)** H 16*	Z8	574734 R 570320	136,96 168,10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)**	Z8 Z8	574794 R 574798 R	124,51 136,96
	U 16* U 20*		570765 570775	174,33 174,33
(DN 26)	U 25*		570780	174,33
	U 32 VP 16*		570785 570910	204,43 185,75
	VP 20* VP 32		570915 570925	185,75 205,47
CONEL	F 16*		570717	177,45
CONNECT MV2	F 20* F 26*		570727 570730	177,45 191,98
	F 32	70	570735	191,98
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51 124,51
	F 26 S (PR-2B)** F 32 S (PR-2B)**	Z8 Z8	574732 R 574734 R	124,51 136,96
	TH 16*	20	570460	186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32	70	570480	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)**	Z8 Z8	574794 R 574798 R	124,51 136,96
	(1 11 20)	20	5.4770 R	100,70

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Conex Bänninger <a> Press Inox	M 15 M 18		570110 570120	154,61 154,61
(304)	M 22		570130	154,61
	M 28		570140	154,61
	M 35 M 35 (PR-3S)	72	570150 572727 R	154,61 672,57
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G) M 42 (PR-3S)	72	570170 572706 R	498,19 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124.51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Conex Bänninger	M 15		570110	154,61
<a> Press Inox (316L)	M 18 M 22		570120 570130	154,61 154,61
	M 28		570140	154,61
	M 35 M 35 (PR-3S)	72	570150 572727 R	154,61 672,57
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G) M 42 (PR-3S)	72	570170 572706 R	498,19 672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Conex Bänninger	F 16*	20	570717	177,45
>B< Flex	F 18* F 20*		570720 570727	177,45 177,45
	F 32		570735	177,45
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51
	F 32 S (PR-2B)	Z8	574734 R	124,51 136,96
	H 16*		570320	168,10
	H 18* H 20*		570340 570350	168,10 168,10
	H 25*		570360	168,10
	H 32 RFz 16*		570380 571325	168,10 194,05
	RFz 18*		571327	194,05
	RFz 20* RFz 25		571330 571335	194,05 194,05
	RFz 32		571340	194,05
	TH 16* TH 18*		570460 570465	186,32 186,32
	TH 20*		570470	186,32
	TH 25* TH 32		570495 570480	186,32 186.32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574786 R 574788 R	124,51 124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,96 174.33
	U 18*		570770	174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 32		570785	204,43
Conex Bänninger >B< Flex Gas	F 16* F 18*		570717 570720	177,45
>D< LIGY 042	F 20*		570727	177,45 177,45
	F 32 F 16 S (PR-2B)**	70	570735	191,98
	F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51 124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16* H 18*		570320 570340	168,10 168,10
	H 20*		570350	168,10
	H 25* H 32		570360 570380	168,10 168,10
	RFz 16*		571325	194,05
	RFz 18* RFz 20*		571327 571330	194,05 194,05
	RFz 25		571335	194,05
	RFz 32 TH 16*		571340 570460	194,05 186,32
	TH 18*		570465	186,32
	TH 20* TH 25*		570470 570495	186,32 186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Z8 Z8	574782 R 574786 R	124,51 124,51
	TH 20 S (PR-2B)**	Z8 Z8	574788 R	124,51
	TH 25 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574792 R 574798 R	124,51
	U 16*	20	574798 R 570765	136,96 174,33
	U 18*		570770	174,33
	U 20* U 25*		570775 570780	174,33 174,33
0 5"	U 32		570785	204,43
Conex Bänninger >B< MaxiPro	BMP 1/4" BMP 3/8"		571700 R 571702 R	184,71 184,71
*	BMP 1/2"		571704 R	184,71
	BMP 5/8" BMP 3/4"		571706 R 571708 R	184,71 184,71
	BMP %"		571710 R	184,71
	BMP 1"		571712 R	184,71

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	
Conex Bänninger	V 12		570107	154,
B< Press	V 14 V 15		570112 570115	154, 154,
	V 15 V 16		570113	154,
	V 18		570125	154,
	V 22		570135	154,
	V 28 V 35		570145 570155	154, 154,
	V 42		570165	360,
	V 54		570175	370,
	V 12 S (PR-2B)	Z8	574748 R	124,
	V 14 S (PR-2B) V 15 S (PR-2B)	Z8 Z8	574800 R 574752 R	124,! 124,!
	V 16 S (PR-2B)	Z8	574802 R	124,
	V 18 S (PR-2B)	Z8	574756 R	124,
	V 22 S (PR-2B)	Z8	574758 R	124,
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124, 136,
	M 15	20	570110	154,
	M 22		570130	154,
P D=:	M 28	75	570140	154,
Conex Bänninger >B< Press XL	VFz 64,0 (PR-3B) CBVFz 66,7 (PR-3B)	Z5 Z5	572815 R 572847 R	609, 609,
copper	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816 R	609,
	VFz 88,9 (PR-3B)6)	Z5	572817 R	645,
Conex Bänninger	VFz 108,0 (PR-3B) ⁶⁾ V 15	Z5	572818 R 570115	645, 154.
>B< Press carbon	V 18		570125	154,
- B - I Tess curbon	V 22		570135	154,
	V 28		570145	154,
	V 35 V 42		570155 570165	154, 360,
	V 42 V 42 (PR-2B)	Z2	572850 R	322,
	V 54		570175	370,
	V 54 (PR-2B)	Z2	572851 R	348,
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,! 124,!
	V 22 S (PR-2B)	Z8	574758 R	124,
	V 28 S (PR-2B)	Z8	574760 R	124,
0	V 35 S (PR-2B)	Z8	574762 R	136,
Conex Bänninger >B< Press XL carbon	XP 64,0 XL (PR-3S) XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R 579108 R	1.056, 1.161,
5 11000 AE 0012011	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,
	CBM 88,9 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R	1.355,
Conex Bänninger	CBM 108,0 XL (PR-3S) V 12	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579146 R 570107	1.355, 154,
B< Press Gas	V 12		570112	154,
	V 15		570115	154,
	V 16		570117	154,
	V 18 V 22		570125 570135	154, 154,
	V 28		570145	154,
	V 35		570155	154,
	V 42 V 54		570165	360,
	V 12 S (PR-2B)	Z8	570175 574748 R	370, 124,
	V 14 S (PR-2B)	Z8	574800 R	124,
	V 15 S (PR-2B)	Z8	574752 R	124,
	V 16 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574802 R 574756 R	124, 124,
	V 22 S (PR-2B)	Z8	574758 R	124,
	V 28 S (PR-2B)	Z8	574760 R	124,
	V 35 S (PR-2B)	Z8	574762 R	136,
Conex Bänninger ·B< Press Inox	V 15 V 18		570115 570125	154, 154,
D - 1 1633 IIIUA	V 22		570125	154,
	V 28		570145	154,
	V 35		570155	154,
	V 42 V 42 (PR-2B)	72	570165 572850 R	360, 322,
	V 42 (PK-2B) V 54	LL	572650 K 570175	370,
	V 54 (PR-2B)	72	572851 R	348,
	V 15 S (PR-2B)	Z8	574752 R	124,
	V 18 S (PR-2B)	Z8 Z8	574756 R	124,
	V 22 S (PR-2B) V 28 S (PR-2B)	28 28	574758 R 574760 R	124, 124,
			0, 1, JU II	144,

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Conex Bänninger >B< Press XL stainless	XP 64,0 XL (PR-3S) XP 66,7 XL (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R 579108 R 579101 R	1.056,63 1.161,47 1.161,47
otume55	CBM 88,9 XL (PR-3S) CBM 108,0 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579144 R 579146 R	1.355,58
Conex Bänninger B< Press Solar	V 12 V 14		570107 570112	154,61 154,61
	V 15 V 16		570115 570117	154,61 154,61
	V 18 V 22		570125 570135	154,61 154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42 V 54		570165 570175	360,13 370,51
	V 12 S (PR-2B) V 14 S (PR-2B)	Z8 Z8	574748 R 574800 R	124,51 124,51
	V 15 S (PR-2B) V 16 S (PR-2B)	Z8 Z8	574752 R 574802 R	124,51 124,51
	V 18 S (PR-2B)	Z8 Z8 Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8 Z8	574758 R 574760 R 574762 R	124,51 124,51 136,96
		D		
Debrunner Acifer 1-a Presssystem	M 12 M 15		570100 570110	154,61 154,61
C-Stahl	M 18 M 22		570120 570130	154,61 154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S) M 54 (PR-3S)	Z2 72	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S) M 12 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579111 R 574736 R	1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
HODIDE CVCTEME	M 35 S (PR-2B)	Z8	574746 R	136,96
UOPIPE SYSTEMS UOFIL MKSYSTEM	U 16* U 18*		570765 570770	174,33 174,33
	U 20* U 25*		570775 570780	174,33 174,33
W Verbundrohr	U 32 U 16*		570785 570765	204,43 174,33
nultitubo systems	U 18* U 20*		570770 570775	174,33 174,33
	U 25* U 32		570780 570785	174,33 204,43
	U 40 U 50		570790 570795	249,07 298,89
	U 63 (PR-3B) U 63 (PZ-S)	Z 4	572837 R 572365	733,81 645,58
	U 75 (PR-3B)	74	572828 R	645,58
BRILLE	U 16*	E	570765	174,33
somonflex	U 20* U 25*		570775 570780	174,33 174,33
	H 26* TH 26*		570370 570475	168,10 186,32
	TH 26 S (PR-2B)** U 32	Z8	574794 R 570785	124,51 204,43
BRILLE	U 16*		570765	174,33
lonflex	U 20* U 25*		570775 570780	174,33 174,33
	H 26* TH 26*	70	570370 570475	168,10 186,32
	TH 26 S (PR-2B)** U 32	Z8	574794 R 570785	124,51 204,43

207

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- $^{\scriptscriptstyle 3)}\,$ Driven by REMS Power-Press XL ACC, see page 188.
- $^{\mbox{\tiny 4)}}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- $^{\rm 5)}~$ For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}\;$ For making press joints for operating pressure \leq PN 10.
- $^{9)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{10)}$ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\ensuremath{\ensuremath{\mathcal{V}}}$ " G" on the pressing jaws for gas installations.
- $^{12)}$ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

 $See \ page \ 238 \ for \ adapter \ tongs. Pressing \ tongs/pressing \ rings \ for \ additional \ pressfitting \ systems \ on \ request.$

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
EFFEBI PRESS	M 15		570110	154,61
EFFEBI-PRESS Aisi316	M 18 M 22		570120 570130	154,61 154,61
System M Profile ¹⁾	M 28		570140	154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)8)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
EFFEBI	V 12	20	570107	154,61
EFFEBI-PRESS	V 15		570115	154,61
Aisi316 System V Profile	V 18 V 22		570125 570135	154,61 154,61
	V 28		570145	154,61
	V 35 V 42		570155 570165	154,61 360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54 V 54 (PR-2B)	72	570175 572851 R	370,51 348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8 Z8	574760 R	124,51
EFFEBI	V 35 S (PR-2B) M 12	20	574762 R 570100	136,96 154.61
EFFEBI-PRESS	M 15		570110	154,61
Carbon-S System M Profile ¹⁾	M 18 M 22		570120 570130	154,61 154,61
0,010	M 28		570140	154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
EFFEBI	V 12		570107	154,61
EFFEBI-PRESS Carbon-S	V 15 V 18		570115 570125	154,61 154,61
System V Profile	V 22		570135	154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77
	V 54 V 54 (PR-2B)	Z2	570175 572851 R	370,51 348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
EFFEBI	V 12	20	570107	154,61
EFFEBI-PRESS COPPER	V 14 V 15		570112 570115	154,61 154,61
CUFFER	V 16		570117	154,61
	V 18		570125	154,61
	V 22 V 28		570135 570145	154,61 154,61
	V 35		570155	154,61
	V 42 V 42 (PR-2B)	Z2	570165 572850 R	360,13 322,77
	V 54		570175	370,51
	V 54 (PR-2B) V 12 S (PR-2B)	Z2 Z8	572851 R 574748 R	348,72 124,51
	V 14 S (PR-2B)	Z8	574746 R 574800 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 16 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574802 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
EFFEBI	V 12		570107	154,61
EFFEBI-PRESS UNICO	V 15 V 18		570115 570125	154,61 154,61
	V 22		570135	154,61
	V 28		570145 570155	154,61
	V 35 V 42		570155 570165	154,61 360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54 V 54 (PR-2B)	72	570175 572851 R	370,51 348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8 79	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Z8 Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96

	Pressing tongs /	Driven by		_
System	pressing rings	adapter tongs	ArtNo.	€
EFFEBI-PRESS	V 12 V 15		570107 570115	154,61 154,61
UNICO	V 18		570125	154,61
(GAS)	V 22		570135	154,61
	V 28		570145	154,61
	V 35 V 42		570155 570165	154,61 360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	72	572851 R	348,72
	V 12 S (PR-2B) V 15 S (PR-2B)	Z8 Z8	574748 R 574752 R	124,51 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
EFFEBI	M 15	20	574702 K 570110	154,61
PRESSTIGE	M 18		570120	154,61
	M 22		570130	154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
	V 15	20	570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28 V 35		570145 570155	154,61 154.61
	V 42		570165	360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54	72	570175	370,51
	V 54 (PR-2B) V 15 S (PR-2B)	Z8	572851 R 574752 R	348,72 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
EFFEBI	M 15	20	570110	154,61
PRESSTIGE 4E05	M 18		570120	154,61
	M 22		570130	154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
PRESSTIGE-GAS	M 15		570110 570120	154,61 154,61
FRESSTIUE-UAS	M 18 M 22		570120	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B) V 15	Z8	574746 R 570115	136,96
	V 18		570115	154,61 154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35 V 42		570155 570165	154,61 360,13
	V 42 V 42 (PR-2B)	72	570165 572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	72	572851 R	348,72
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
EFFEBI	V 35 S (PR-2B) TH 16*	Z8	574762 R 570460	136,96 186,32
TOF-GAS	TH 20*		570460	186,32
MULTIPINZA	TH 26*		570475	186,32
	TH 32	70	570480	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 20* H 26*		570350 570370	168,10 168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	U 16* U 20*		570765	174,33
	U 32		570775 570785	174,33 204,43

186,32 186,32 186,32 186,32 186,32 186,32 246,99 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 136,96 168,10
186,32 186,32 186,32 186,32 186,32 186,32 186,32 186,99 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 126,96
186,32 186,32 186,32 246,99 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,55 R 124,55 R 124,55 R 124,55 177,45 177,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,45 171,
186.32 246.99 645.58 R 124.51 R 124.51 R 124.51 R 124.51 R 124.51 R 124.51 R 136.96 177.45 177.45 191.98 205.47 311.35 645.58 R 124.51 R 124.51 R 124.51
186.32 246.99 645.58 645.58 R 124.51 R 124.51 R 124.51 R 124.51 R 124.57 R 124.57 R 136.96 177.45 177.45 191.98 191.98 205.47 311.35 645.58 R 124.51 R 124.51 R 124.51 R 124.51
246,99 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 127,45 177,45 177,45 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51
645,58 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 136,96 177,45 177,45 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 136,96
645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 136,96 177,45 177,45 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51
R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 136,96 177,45 177,45 191,98 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51
R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 136,96 177,45 177,45 191,98 205,47 311,36 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 124,51 R 136,96
R 124,51 R 124,51 R 124,51 R 124,51 R 136,96 177,45 177,45 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 136,96 168,10
R 124,51 R 124,51 R 124,51 R 136,96 177,45 177,45 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 124,51 R 126,68,10
R 124,51 R 124,51 R 136,96 177,45 177,45 191,98 205,47 311,33 645,58 R 124,51 R 124,51 R 124,51 R 126,96
R 124,51 R 136,96 177,45 177,45 191,98 205,47 311,38 645,58 R 124,51 R 124,51 R 124,51 R 136,96
R 136,96 177,45 177,45 177,45 191,98 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 136,96
177,45 177,45 177,45 191,98 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 124,61
177,45 177,45 191,88 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 136,96
177,45 191,98 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 136,96
191,98 191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 126,51 R 136,96
191,98 205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 136,96
205,47 311,35 645,58 R 124,51 R 124,51 R 124,51 R 136,96
311,35 645,58 R 124,51 R 124,51 R 124,51 R 136,96 168,10
645,58 R 124,51 R 124,51 R 124,51 R 136,96 168,10
R 124,51 R 124,51 R 124,51 R 136,96 168,10
R 124,51 R 124,51 R 136,96 168,10
R 124,51 R 136,96 168,10
R 136,96 168,10
168,10
,
168.10
168.10
168,10
168,10
565,67
174,33
174,33
174,33
174,33
204,43
204,43
249,07
298,89
R 733,81
645,58
203,40
203,40
203,40
224,16
224,16
174,33
174,33
174,33
174,33
204,43
174,33
174,33
174,33
174,33
204,43
186,79
186,79
186,79
186,79
360,13
370,51
R 609,25
R 609,25
R 609,25 R 645,58

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
EMMETI GERPEX-	B 16* B 20*		570850 570860	203,40 203,40
FIVPRESS	B 26		570870	224,16
	B 32		570880	224,16
	H 16* H 20*		570320 570350	168,10 168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58 174.33
	U 16* U 20*		570765 570775	174,33
EMPUR	TH 14*		570455	186,32
	TH 15*		570457	186,32
	TH 16* TH 17*		570460 570462	186,32 186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 14 S (PR-2B)** TH 15 S (PR-2B)**	Z8 Z8	574778 R 574780 R	124,51 124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 17 S (PR-2B)**	Z8	574784 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124,51 124,51
sta Rohr	M 15	20	570110	154,61
simplesta SH M	M 18		570120	154,61
	M 22		570130	154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
sta Rohr	M 35 S (PR-2B) M 15	Z8	574746 R 570110	136,96 154,61
implesta ST M	M 18		570120	154,61
	M 22		570130	154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2 Z2	572706 R	672,57
	M 54 (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	572708 R 579101 R	672,57 1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S) ⁸⁾	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
UROTUBI	M 35 S (PR-2B) M 12	Z8	574746 R 570100	136,96 154,61
EUROPA	M 15		570110	154,61
-Steel Pressfitting	M 18		570120	154,61
System M-Profile ¹⁾	M 22 M 28		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S) M 74 1 VI (PD-3S)	Z2 Z6 XL³) / Z7 XL 45 kN⁴)	572708 R 579101 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴ Z6 XL ³ / Z7 XL 45 kN ⁴	579101 K 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- $^{\scriptscriptstyle 3)}\,$ Driven by REMS Power-Press XL ACC, see page 188.
- $^{\mbox{\tiny 4)}}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- $^{\rm 5)}~$ For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}\;$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{10)}$ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\ensuremath{\ensuremath{\mathcal{V}}}$ " G" on the pressing jaws for gas installations.
- $^{12)}$ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

 $See \ page \ 238 \ for \ adapter \ tongs. \ Pressing \ tongs/pressing \ rings \ for \ additional \ pressfitting \ systems \ on \ request.$

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
EUROTUBI	M 15	anapter tempe	570110	154,61
EUROPA Inox Pressfitting	M 18 M 22		570120 570130	154,61 154,61
System M-Profile ¹⁾	M 28		570140	154,61
	M 35 M 42 (PR-3S)	Z2	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124.51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Evans	VAU 15 (½") (OD 12,7 mm)		572687	159,80
Components Presslok	VAU 20 (¾") (OD 19,1 mm) VAU 25 (1") (OD 25,4 mm)		572689 572691	159,80 159,80
	ECI 11/2"		571932	200,28
	ECI 2" (PZ-4G) ECI 2½" XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	571934 579104 R	498,19 1.056,63
	ECI 3" XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579105 R	1.161,47
	ECI 4" XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579106 R	1.355,58
FAR Rubinetterie	TH 14*	F	570455	186,32
PRESSFAR	TH 16*		570455	186,32
	TH 17* TH 18*		570462 570465	186,32 186,32
	TH 20*		570470	186,32
	TH 25* TH 26*		570495	186,32
	TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 16 S (PR-2B)** TH 17 S (PR-2B)**	Z8 Z8	574782 R 574784 R	124,51 124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) H 14*	Z8	574798 R 570310	136,96 168,10
	H 16*		570320	168,10
	H 18* H 20*		570340 570350	168,10 168,10
	H 26*		570370	168,10
	H 32 H 40 (PZ-4G)		570380 570390	168,10 565,67
	U 14*		570760	174,33
	U 16* U 18*		570765 570770	174,33 174,33
	U 20*		570775	174,33
	U 25* U 32		570780 570785	174,33 204,43
	U 40		570790	249,07
	U 50 U 63 (PR-3B)	Z 4	570795 572837 R	298,89 733,81
	U 63 (PZ-S)	24	572365	645,58
F.B.Q. BARONIO BQ PRESS SOLAR	V 12 V 14		570107 570112	154,61 154,61
DQ F NESS SOLAN	V 15		570115	154,61
	V 16 V 18		570117 570125	154,61 154,61
	V 22		570135	154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54 V 54 (PR-2B)	72	570175 572851 R	370,51 348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 14 S (PR-2B) V 15 S (PR-2B)	Z8 Z8	574800 R 574752 R	124,51 124,51
	VG 16 S (PR-2B)	Z8	574754 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Z8 Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
F.B.Q. BARONIO	V 35 S (PR-2B) V 12	Z8	574762 R 570107	136,96 154,61
BQ PRESS WATER	V 14		570112	154,61
	V 15 V 16		570115 570117	154,61 154,61
	V 18		570125	154,61
	V 22 V 28		570135 570145	154,61 154,61
	V 35		570155	154,61
	V 42 V 42 (PR-2B)	Z2	570165 572850 R	360,13 322,77
	V 42 (PR-2B) V 54		572850 K 570175	322,77 370,51
	V 54 (PR-2B)	Z2 79	572851 R	348,72
	V 12 S (PR-2B) V 14 S (PR-2B)	Z8 Z8	574748 R 574800 R	124,51 124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	VG 16 S (PR-2B)	Z8 Z8	574754 R 574756 R	124,51 124,51
	V 10 3 (PK-2D)			,
	V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51

System	Pressing tongs /	Driven by	ArtNo.	€
F.B.Q. BARONIO	pressing rings V 12	adapter tongs	570107	154,61
BQ PRESS GAS	V 14		570112	154,61
	V 15 V 16		570115 570117	154,61 154,61
	V 18		570125	154,61
	V 22 V 28		570135 570145	154,61 154,61
	V 35		570155	154,61
	V 42	70	570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 (PR-2B)	72	572851 R	348,72
	V 12 S (PR-2B) V 14 S (PR-2B)	Z8 Z8	574748 R 574800 R	124,51 124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	VG 16 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574754 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
FERCOFLOOR	RFz 16*		571325	194,05
DUO Press FERCO PEX	RFz 20* RFz 25		571330 571335	194,05 194,05
TERCOTEX	RFz 32		571340	194,05
	TH 16* TH 20*		570460	186,32
	TH 25*		570470 570495	186,32 186,32
	TH 32		570480	186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124.51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
FERCOFLOOR	TH 32 S (PR-2B) RFz 16*	Z8	574798 R 571325	136,96
DUO Press	RFz 20*		571325	194,05 194,05
MULTIFER	RFz 25		571335	194,05
	RFz 32 TH 16*		571340 570460	194,05 186,32
	TH 20*		570470	186,32
	TH 25* TH 32		570495 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574772 R 574798 R	136,96
	U 16* U 18*		570765	174,33
	U 20*		570770 570775	174,33 174,33
	U 25*		570780	174,33
	U 32 U 40		570785 570790	204,43 249,07
	U 50		570795	298,89
FERRO systems	U 63 (PZ-S) TH 16*		572365 570460	645,58 186,32
BRASELÍ	TH 20*		570470	186,32
GPF GAS	TH 25* TH 32		570495 570480	186,32 186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574772 R 574798 R	136,96
FERRO systems BRASELI	U 16* U 18*		570765 570770	174,33
GPF MULT	U 20*		570775	174,33 174,33
Pressfitting	U 25*		570780	174,33
MULTICAPA	U 32 U 40		570785 570790	204,43 249,07
	U 50		570795	298,89
FERRO systems BRASELI	U 16* U 18*		570765 570770	174,33 174,33
GPF PPSU	U 20*		570775	174,33
Pressfitting PEX y MULTICAPA	U 25* U 32		570780 570785	174,33 204,43
I EN Y PIULITOAFA	U 40		570790	249,07
FFDDOt	U 50		570795	298,89
FERRO systems BRASELI	RFz 16* RFz 20*		571325 571330	194,05 194,05
GPF PRESS	RFz 25		571335	194,05
Pressfitting PEX FILINOX	RFz 32 FTB 15		571340 571432	194,05 224,16
Filpress	FTB 18		571434	224,16
	FTB 22		571436	224,16
			571/.38	771.14
	FTB 28 M 42 (PR-3S)	72	571438 572706 R	224,16 672,57
	FTB 28 M 42 (PR-3S) M 54 (PR-3S)	72	572706 R 572708 R	672,57 672,57
	FTB 28 M 42 (PR-3S)		572706 R	672,57

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
FILINOX	M 15		570110	154,61
nstalpress Steel	M 18		570120	154,61
	M 22		570130	154,61 154.61
	M 28 M 35		570140 570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
LINOX	M 15	20	570110	154,61
stalpress Inox	M 18		570120	154,61
•	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z7 XL 45 kN ⁴⁾ Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8 Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
FITTINGS ESTÁNDAR ECO-PRESS	RFz 16*		571325	194,05
	RFz 20*		571330	194,05
	RFz 25		571335	194,05
ITTINGS ESTÁNDAR	RFz 32 RFz 16*		571340 571325	194,05
ULTICAPA	RFz 18*		571325	194,05 194,05
IOLITICAL A	RFz 20*		571330	194,05
	RFz 25		571335	194,05
	RFz 32		571340	194,05
ITTINGS ESTÁNDAR	RFz 16*		571325	194,05
E-X	RFz 20*		571330	194,05
	RFz 25		571335	194,05
0011101	RFz 32		571340	194,05
ORNARA orPress	B 16* B 20*		570850 570860	203,40 203,40
0111622	B 26		570870	224,16
	B 32		570880	224,16
	F 16*		570717	177,45
	F 20*		570727	177,45
	F 26*		570730	191,98
	F 32		570735	191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)**	Z8	574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51
	F 32 S (PR-2B)	Z8	574734 R	136,96
	H 16* H 20*		570320 570350	168,10 168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16* U 20*		570765 570775	174,33 174,33
	U 26* 12)		570775 570750	204,43
	U 20		570705	204,43

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
FORZA	K16/P18*		572600	194,05
WATER CRIMP	K/20*		572605	194,05
(AUS)	K/25* K32		572610 572615	194,05 194,05
	K1/40		572620	194,05
	K1/50		572625	318,61
FORZA STAINLESS	K16/P18*		572600	194,05
WATER CRIMP	K/20*		572605	194,05
FORZA STESSO PEX	U 16* U 20*		570765 570775	174,33 174,33
WATER AND GAS	U 25*		570780	174,33
CRIMP	U 32		570785	204,43
(AUS)	U 40		570790	249,07
	U 50		570795 572365	298,89
FORZA	U 63 (PZ-S) K16/P18*		572600	645,58 194,05
GAS CRIMP	K/20*		572605	194,05
(AUS)	K/25*		572610	194,05
	K32		572615	194,05
	K1/40		572620	194,05
FORZA	K1/50 VAU 15 (OD 12,7 mm)		572625 572687	318,61 159,80
COPPER V PRESS	VAU 20 (OD 19,1 mm)		572689	159,80
(AUS)	VAU 25 (OD 25,4 mm)		572691	159,80
	VAU 32 (OD 31,8 mm)		572693	168,10
	VAU 40 (OD 38,1 mm)		572695	249,07
	VAU 50 (OD 50,8 mm) VAUFz 65 (PR-3B) (OD 63.5 mm)	Z 5	572697 572839 R	441,10 609,25
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5 Z5	572840 R	609,25
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	645,58
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	124,51
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	124,51
FORZA	VAU 25 S (PR-2B)** (OD 25,4 mm) V 15	Z8	574808 R 570115	136,96 154,61
STAINLESS V PRESS	V 22		570135	154,61
(AUS)	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 54 M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	570175	370,51 1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8 Z8	574760 R	124,51
FRABO	V 35 S (PR-2B) M 15	20	574762 R 570110	136,96 154,61
FRABOPRESS	M 18		570120	154,61
316 GAS M	M 22		570130	154,61
	M 28		570140	154,61
	M 35	70	570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
		Z8	574738 R	124.51
	M 15 S (PR-2B)		574740 R	124,51
	M 18 S (PR-2B)	Z!		
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8	574742 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
EDARO	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Z8	574742 R 574744 R 574746 R	124,51 124,51 136,96
FRABO FRABOPRESS	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15	Z8 Z8	574742 R 574744 R 574746 R 570115	124,51 124,51 136,96 154,61
FRABO FRABOPRESS 316 GAS V	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574742 R 574744 R 574746 R	124,51 124,51 136,96 154,61
FRABOPRESS	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 V 18 V 22 V 28	Z8 Z8	574742 R 574744 R 574746 R 570115 570125 570135 570145	124,51 124,51 136,96 154,61 154,61 154,61
FRABOPRESS	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 38 S (PR-2B) V 15 V 18 V 22 V 28 V 35	Z8 Z8	574742 R 574744 R 574746 R 570115 570125 570135 570145 570155	124,51 124,51 136,96 154,61 154,61 154,61 154,61
FRABOPRESS	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 38 S (PR-2B) V 15 V 18 V 22 V 28 V 35 V 42	Z8 Z8 Z8	574742 R 574744 R 574746 R 570115 570125 570135 570145 570155 570165	124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 360,13
FRABOPRESS	M 18 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) V 15 V 18 V 22 V 28 V 35 V 35 V 42 V 42 (PR-2B)	Z8 Z8	574742 R 574744 R 574746 R 570115 570125 570135 570145 570165 570165 572850 R	124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 322,77
FRABOPRESS	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 38 S (PR-2B) V 15 V 18 V 22 V 28 V 35 V 42	Z8 Z8 Z8	574742 R 574744 R 574746 R 570115 570125 570135 570145 570155 570165	124,51 124,51 136,96 154,61 154,61 154,61
FRABOPRESS	M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 V 18 V 22 V 28 V 35 V 42 V 42 V 42 (PR-2B) V 54	28 28 28 28	574742 R 574744 R 574746 R 570115 570125 570135 570145 570155 570165 572850 R 570175	124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 322,77 370,51
FRABOPRESS	M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) V 15 V 18 V 22 V 28 V 35 V 42 V 42 (PR-2B) V 54 (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B)	28 28 29 22 22 28 28	574742 R 574744 R 574746 R 570115 570125 570135 570145 570145 570165 572850 R 570175 572851 R 574752 R 574756 R	124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 322,77 370,51 348,72 124,51
FRABOPRESS	M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 38 S (PR-2B) V 15 V 18 V 22 V 28 V 35 V 42 V 42 (PR-2B) V 54 V 54 (PR-2B) V 15 S (PR-2B)	28 28 28 22 22 22 28	574742 R 574744 R 574746 R 570115 570125 570135 570145 570155 570165 572850 R 570175 572851 R 574752 R	124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 360,13 322,77 370,51 348,72 124,51

211

570785 Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

204,43

- $^{2)}$ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
FRABO	M 15	_auptor tongo	570110	154,61
FRABOPRESS 316 M	M 18 M 22		570120 570130	154,61 154,61
31014	M 28		570140	154,61
	M 35	70	570150	154,61 672.57
	M 42 (PR-3S) M 54 (PR-3S)	Z2 Z2	572706 R 572708 R	672,57
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47
	M 76,1 XL (PR-3S) M 88.9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
FRABO	M 35 S (PR-2B)	Z8	574746 R 570115	136,96
FRABOPRESS	V 15 V 18		570125	154,61 154,61
316 V	V 22		570135	154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54 V 54 (PR-2B)	72	570175 572851 R	370,51 348,72
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
FRABO FRABOPRESS	V 12		570107	154,61
CHROME	V 15 V 18		570115 570125	154,61 154,61
0111101112	V 22		570135	154,61
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
FRABO FRABOPRESS	M 15 M 18		570110 570120	154,61 154,61
C-STEEL M	M 22		570120	154,61
	M 28		570140	154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 66,7 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579107 R	1.161,47
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
FD100	M 35 S (PR-2B)	Z8	574746 R	136,96
FRABO FRABOPRESS	V 12 V 15		570107 570115	154,61 154,61
C-STEEL V	V 18		570125	154,61
	V 22		570135 570145	154,61
	V 28 V 35		570145	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 (PR-2B)	72	572851 R	348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
FRABO	M 12	20	570100	154,61
FRABOPRESS	M 15		570110	154,61
GAS M	M 18 M 22		570120 570130	154,61 154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	Z2 Z2	572706 R 572708 R	672,57 672,57
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
FDADO	M 35 S (PR-2B)	Z8	574746 R	136,96
FRABO Frabopress	V 12 V 15		570107 570115	154,61 154,61
GAS V	V 18		570125	154,61
	V 22		570135 570145	154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B)	Z2	572850 R	322,77
	V 54 V 54 (PR-2B)	72	570175 572851 R	370,51 348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Z8 Z8	574756 R 574758 R	124,51 124,51
			0. 71 00 IL	144,01
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
FRABO FRABOPRESS	V 12 V 15		570107 570115	154,61 154,61
KOMBI	V 18		570125	154,61
	V 22 V 28		570135 570145	154,61 154,61
	V 35 V 42		570155 570165	154,61 360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54 V 54 (PR-2B)	72	570175 572851 R	370,51 348,72
	M 66,7 XL (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R 579101 R	1.161,47 1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S) V 12 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579111 R 574748 R	1.355,58 124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
FRABO Frabopress M	M 12 M 15		570100 570110	154,61 154,61
	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 66,7 XL (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R 579101 R	1.161,47 1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124.51
FDADO	M 35 S (PR-2B)	Z8	574746 R	136,96
FRABO FRABOPRESS	V 15 V 18		570115 570125	154,61 154,61
SOLAR	V 22 V 28		570135 570145	154,61 154,61
	V 35	70	570155	154,61
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
FRABO FRABOPRESS V	V 12 V 15		570107 570115	154,61 154,61
	V 18 V 22		570125 570135	154,61 154,61
	V 28		570145	154,61
	V 35 V 42		570155 570165	154,61 360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370.51
	V 54 (PR-2B)	72	572851 R	348,72
	V 12 S (PR-2B) V 15 S (PR-2B)	Z8 Z8	574748 R 574752 R	124,51 124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Z8 Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
Fränkische	V 35 S (PR-2B) F 16*	Z8	574762 R 570717	136,96 177,45
alpex-duo XS	F 20* F 26*		570727 570730	177,45 191,98
	F 32	70	570735	191,98
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51 124,51
	F 26 S (PR-2B)** F 32 S (PR-2B)**	Z8 Z8	574732 R 574734 R	124,51 136,96
	TH 16*	20	570460	186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)**	Z8 Z8	574794 R 574798 R	124,51 136,96
Fränkische alpex F50 PROFI	F 16* F 20*		570717 570727	177,45 177,45
arpon roo r norr	F 26*		570730	191,98
	F 32 F 16 S (PR-2B)**	Z8	570735 574728 R	191,98 124,51
	F 20 S (PR-2B)** F 26 S (PR-2B)**	Z8 Z8	574730 R 574732 R	124,51 124,51
	F 32 S (PR-2B)**	Z8	574734 R	136,96
	H 16* H 20*		570320 570350	168,10 168,10
	H 26* H 32		570370 570380	168,10 168,10
	TH 16*		570460	186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51
		Z8	574782 R 574788 R	124,51
	TH 20 S (PR-2B)**			
	TH 20 S (PR-2B)** TH 26 S (PR-2B)** TH 32 S (PR-2B)**	Z8 Z8	574794 R 574798 R	124,51 136,96
	TH 26 S (PR-2B)** TH 32 S (PR-2B)** U 16*	Z8	574794 R 574798 R 570765	124,51 136,96 174,33
(DN 26)	TH 26 S (PR-2B)** TH 32 S (PR-2B)** U 16* U 20* U 25*	Z8	574794 R 574798 R 570765 570775 570780	124,51 136,96 174,33 174,33 174,33
(DN 26)	TH 26 S (PR-2B)** TH 32 S (PR-2B)** U 16* U 20*	Z8	574794 R 574798 R 570765 570775	124,51 136,96 174,33 174,33

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Fränkische	Fz 40		570742	205,47
alpex L	Fz 50		570747	311,35
	F 63 (PZ-S) Fz 75 (PR-3B)	Z 4	572385 572830 R	645,58 609,25
	F2 /3 (FN-3D)	G	372030 K	007,23
gabotherm H+S	TH 10*		570467	186,32
	TH 12* TH 14*		570452	186,32
	TH 15*		570455 570457	186,32 186,32
	TH 16*		570460	186,32
	TH 17*		570462	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25* TH 26*		570495 570475	186,32 186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)	70	572405	645,58
	TH 10 S (PR-2B)** TH 12 S (PR-2B)**	Z8 Z8	574772 R 574776 R	124,51 124,51
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 15 S (PR-2B)**	Z8	574780 R	124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 17 S (PR-2B)**	Z8	574784 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574786 R 574788 R	124,51 124,51
	TH 25 S (PR-2B)**	Z8	574700 R 574792 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
Gallagher USA	H 12* (¼") U 14* (¾")		570300 570760	168,10 174,33
YogaPipe ACR	U 16* (½")		570765	174,33
	U 18* (5/8")		570770	174,33
	U 20* (3/4")		570775	174,33
	U 25* (%")		570780	174,33
Geberit Mapress	U 32 (11/8") M 12		570785 570100	204,43 154,61
C-STAHL	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35 M 35 (PR-3S)	72	570150 572727 R	154,61 672,57
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S) M 66,7 XL (PR-3S)	Z2 Z6 XL³) / Z7 XL 45 kN⁴)	572708 R 579107 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47 1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
Geberit Mapress	M 22 M 28		570130 570140	154,61
C-STAHL Sprinkler nass	M 28 M 35 (PR-3S)	72	570140 572727 R	154,61 672,57
op. mass	M 42 (PR-3S)	72	572727 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579107 R	1.161,47
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Geberit Mapress Edelstahl	M 12 M 15 M 18 M 22 M 28 M 35 (PR-3S) M 35 (PR-3S) M 42 (PZ-4G) M 42 (PR-3S) M 44 (PR-3S) M 46 (PR-3S) M 54 (PR-3S) M 59 (PR-3S) M 108 (PR-3S) M 108 (PR-3S) M 108 (PR-2B) M 108 (PR-2B) M 108 (PR-2B) M 108 (PR-2B) M 108 (PR-2B)	72 72 72 76 XL ³⁾ / 77 XL 45 kN ⁴⁾ 76 XL ³⁾ / 77 XL 45 kN ⁴⁾ 78 78 78 78 78 78	570100 570110 5701120 570130 570140 570150 572727 R 570160 572708 R 572708 R 572708 R 579101 R 579110 R 579110 R 57913 R 574736 R 574736 R 574736 R	154.61 154.61 154.61 154.61 154.61 672.57 498.19 672.57 672.57 1.161.47 1.355.58 1.355.58 1.24.51 124.51 124.51
Geberit Mapress Edelstahl Gas	M 35 S (PR-2B) M 15 M 18 M 22 M 28 M 28 M 35 M 35 (PR-3S) M 42 (PR-3S) M 54 (PR-3S) M 54 (PR-3S) M 54, 1X (PR-3S) M 50, 1X (PR-3S) M 108,0 G XL (PR-3S) M 108,0 G XL (PR-2B) M 12 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	72 72 72 72 XL 45 kN ⁴⁾ 77 XL 45 kN ⁴⁾ 27 XL 45 kN ⁴⁾ 28 28 28 28	574746 R 570110 570120 570130 570130 570150 570150 572727 R 572706 R 572708 R 579101 R 579110 R 579111 R 574740 R 574740 R 574744 R 574744 R 574744 R	136,96 154,61 154,61 154,61 154,61 672,57 672,57 672,57 1,161,47 1,355,58 1,355,58 1,24,51 124,51 124,51 124,51 136,96
Geberit Mapress Edelstahl Sprinkler	M 22 M 28 M 35 (PR-3S) M 42 (PR-3S) M 54 (PR-3S) M 66,7 XL (PR-3S) M 75,1 XL (PR-3S) M 89,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	72 72 72 72 76 XL ³⁾ / 27 XL 45 kN ⁴⁾ 76 XL ³⁾ / 27 XL 45 kN ⁴⁾ 76 XL ³⁾ / 27 XL 45 kN ⁴⁾	570130 570140 570140 572727 R 572706 R 572708 R 579107 R 579101 R 579111 R	154,61 154,61 154,61 672,57 672,57 672,57 1.161,47 1.355,58 1.355,58
Geberit Mapress Kupfer	M 12 M 15 M 18 M 18 M 22 M 28 M 35 M 35 (PR-3S) M 42 (PZ-4G) M 42 (PR-3S) M 44 (PR-3S) M 54 (PR-3S) M 54 (PR-3S) M 54 (PR-3S) M 66,7 XL (PR-3S) M 66,7 XL (PR-3S) M 108,0 G XL (PR-3S) M 108,0 G XL (PR-3S) M 12 S (PR-2B) M 15 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B)	22 22 22 23 24 25 XL ³ / 27 XL 45 kN ⁴) 26 XL ³ / 27 XL 45 kN ⁴) 26 XL ³ / 27 XL 45 kN ⁴) 26 XL ³ / 27 XL 45 kN ⁴) 28 28 28 28 28 28 28 28	570100 570110 570110 570120 570130 570140 570150 572727 R 570160 572708 R 572708 R 572708 R 579107 R 579101 R 579101 R 579101 R 579110 R 579140 R 574746 R	154.61 154.61 154.61 154.61 154.61 154.61 154.61 672.57 498.19 672.57 672.57 1.161.47 1.355.58 124.51 124.51 124.51 124.51
Geberit Mapress Kupfer Gas	M 15 M 18 M 22 M 28 M 28 M 35 (R-3S) M 42 (PR-3S) M 42 (PR-3S) M 54 (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B)	72 72 72 78 28 78	570110 570120 570130 570140 570150 572727 R 572706 R 572708 R 574738 R 574740 R 574742 R 574744 R	154,61 154,61 154,61 154,61 154,61 154,61 672,57 672,57 672,57 124,51 124,51 124,51

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	,
Geberit Mepla	G 16*		570400	186,7
	G 20* G 26*		570410 570420	186,7 198,2
	G 32		570430	211,7
	G 40		570440	273,9
	G 50		570450	286,4
Geberit Mepla	G 63 (PZ-S) G 16*		572470 570400	809,5 186,7
Therm	G 20*		570410	186,7
	G 26*		570420	198,2
Geberit Volex	TH 16* TH 20*		570460 570470	186,3 186,3
	TH 26*		570475	186,3
General Fittings	H 16*		570320	168,1
5T00	H 20* H 26*		570350 570370	168,1 168,1
	H 32		570380	168,1
	TH 16*		570460	186,3
	TH 20*		570470	186,3
	TH 26* TH 32		570475 570480	186,3 186,3
	TH 40		570485	246,9
	TH 50 (PZ-S)		572400	645,5
	TH 63 (PZ-S)	70	572405	645,5
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,5 124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
	U 16* U 20*		570765 570775	174,3
	U 32		570785	174,3 204,4
	U 40		570790	249,0
	U 63 (PZ-S)		572365	645,5
annel Fillians	U 63 (PR-3B) H 16*	74	572837 R	733,8
eneral Fittings woprex	H 20*		570320 570350	168,1 168,1
ор.ол	H 26*		570370	168,1
	H 32		570380	168,1
	TH 16* TH 20*		570460 570470	186,3 186,3
	TH 26*		570475	186,3
	TH 32		570480	186,3
	TH 40		570485	246,9
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,5 645,5
	TH 16 S (PR-2B)**	Z8	572405 574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,9 174,3
	U 20*		570775	174,3
	U 32		570785	204,4
	U 40		570790	249,0
	U 63 (PZ-S) U 63 (PR-3B)	Z 4	572365 572837 R	645,5 733,8
ieneral Fittings	B 16*	24	570850	203,4
erie 5SOO	B 18*		570855	203,4
	B 20*		570860	203,4
	B 26 B 32		570870 570880	224,1 224,1
	F 16*		570717	177,4
	F 20*		570727	177,4
	F 26*		570730	191,9
	F 32 F 16 S (PR-2B)**	Z8	570735 574728 R	191,9 124,5
	F 20 S (PR-2B)**	Z8	574730 R	124,5
	F 26 S (PR-2B)**	Z8	574732 R	124,5
	F 32 S (PR-2B) H 16*	Z8	574734 R 570320	136,9 168,1
	H 18*		570340	168,1
	H 20*		570350	168,1
	H 25*		570360	168,1
	H 26* H 32		570370 570380	168,1 168,1
	H 40 (PZ-4G)		570390	565,6
	TH 16*		570460	186,3
	TH 18*		570465	186,3
	TH 20* TH 25*		570470 570495	186,: 186,:
	TH 26*		570495 570475	186,
	TH 32		570480	186,
	TH 40		570485	246,
	TH 50 (PZ-S)		572400 572405	645,
	TH 63 (PZ-S) TH 16 S (PR-2B)**	Z8	572405 574782 R	645, 124,
	TH 18 S (PR-2B)**	Z8	574786 R	124,
	TH 20 S (PR-2B)**	Z8	574788 R	124,
	TH 25 S (PR-2B)**	Z8 79	574792 R	124,
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124, 136,
	U 16*	40	570765	174,
	U 18*		570770	174,3
	U 20*		570775	174,
	U 25*		570780 570785	174,3 204,4
	U 32		570785 570790	249,1
	U 4U		3/11/711	
	U 40 U 63 (PZ-S)		572365	645,

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
General Fittings Trident	H 16* H 20*		570320 570350	168,10 168,10
indent	H 26*		570370	168,10
	H 32		570380	168,10
	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32	70	570480	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16* U 20*		570765 570775	174,33 174,33
	U 32		570785	204,43
General Fittings Trident Gas	TH 16* TH 20*		570460 570470	186,32 186,32
macint ous	TH 26*		570475	186,32
	TH 32	70	570480	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) H 16*	Z8	574798 R	136,96 168.10
	H 20*		570320 570350	168,10
	H 26*		570370	168,10
	U 16* U 20*		570765 570775	174,33 174,33
	U 32		570785	204,43
Giacomini	H 16*		570320	168,10
Raccordi RM Giacomini	H 20* H 26*		570350 570370	168,10 168,10
olacollilli	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 32 U 40		570785 570790	204,43 249,07
	U 50		570795	298,89
Giacomini	H 16*		570320	168,10
RM MULTIGAS	H 20* H 26*		570350 570370	168,10 168,10
	H 32		570380	168,10
	TH 16*		570460	186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32		570480	186,32
	U 16*		570765	174,33
	U 20* U 32		570775 570785	174,33 204,43
Giacomini	V 15		570115	154,61
Valvole Giacomini serie R850V	V 18 V 22		570125 570135	154,61 154,61
Selle Koduv	V 28		570145	154,61
	V 35		570155	154,61
	V 42 V 54		570165 570175	360,13 370,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
	SA 15		570935	185,75
	SA 18 SA 22		570940 570945	185,75 185,75
	SA 28		570950	185,75
	SA 35		570955	185,75
	M 15 M 18		570110 570120	154,61 154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35 M 15 S (PR-2B)	Z8	570150 574738 R	154,61 124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Golan Pipe	U 16*		570765	174,33
Systems	U 20*		570775	174,33
(Scandinavia) Alu-Pres	U 25* U 32		570780 570785	174,33 204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S) U 63 (PR-3B)	Z 4	572365 572837 R	645,58 733,81
	U 75 (PR-3B)	74	572828 R	645,58
Grinnell G-PRESS	VUS ½" (OD 15,9 mm)		571770	186,79
Copper Fittings	VUS ¾" (OD 22,2 mm) VUS 1" (OD 28,6 mm)		571775 571780	186,79 186,79
	VUS 1¼" (OD 34,9 mm)		571785	186,79
	VUS 1½" (OD 41,3 mm)		571790	360,13
	VUS 2" (OD 54,0 mm) VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z 5	571795 572819 R	370,51 609,25
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	

System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	€
GS	TH 14*		570455	186,32	Herotec	H 16*		570320	168,10
Wärmesysteme System TH	TH 16* TH 20*		570460 570470	186,32 186,32	tempusPRESS	H 20*		570350	168,10
System in	TH 26*		570475	186,32	PLUS	H 25* H 32		570360 570380	168,10 168,10
	TH 32		570480	186,32		H 40 (PZ-4G)		570390	565,67
	TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58		RFz 16*		571325	194,05
	TH 63 (PZ-S)		572405	645,58		RFz 20*		571330	194,05
	TH 14 S (PR-2B)**	Z8	574778 R	124,51		RFz 25		571335	194,05
	TH 16 S (PR-2B)**	Z8	574782 R 574788 R	124,51		RFz 32 TH 16*		571340 570460	194,05 186,32
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574766 K 574794 R	124,51 124,51		TH 20*		570470	186,32
	TH 32 S (PR-2B)	Z8	574798 R	136,96		TH 25*		570495	186,32
GS	V 15 V 18		570115	154,61		TH 32		570480	186,32
Wärmesysteme System V	V 22		570125 570135	154,61 154,61		TH 40		570485	246,99
-,	V 28		570145	154,61		TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	V 35	70	570155	154,61		TH 16 S (PR-2B)**	Z8	574782 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51		TH 25 S (PR-2B)**	Z8	574792 R	124,51
	V 28 S (PR-2B)	Z8 Z8	574760 R	124,51		TH 32 S (PR-2B)	Z8	574798 R	136,96
	V 35 S (PR-2B)	20	574762 R	136,96		U 16* U 20*		570765 570775	174,33 174,33
	H					U 25*		570780	174,33
HACTINIK			F70110	157.71		U 32		570785	204,43
HASTINIK Hastinik/Hitpress	M 15 M 18		570110 570120	154,61 154,61		U 40		570790	249,07
пассиния	M 22		570130	154,61		U 50		570795	298,89
	M 28		570140	154,61		U 63 (PZ-S) U 63 (PR-3B)	74	572365 572837 R	645,58 733,81
	M 35 M 42 (PZ-4G)		570150 570160	154,61 498,19		U 75 (PR-3B)	24	572828 R	645,58
	M 54 (PZ-4G)		570170	498,19	Herotec	H 16*		570320	168,10
	M 42 (PR-3S)	72	572706 R	672,57	tempusPRESS	H 20*		570350	168,10
	M 54 (PR-3S) M 76.1 XL (PR-3S)	Z2 Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	572708 R 579101 R	672,57 1.161,47	PLUS PPSU	H 25* H 32		570360 570380	168,10 168,10
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58		TH 16*		570460	186,32
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58		TH 20*		570470	186,32
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51		TH 25*		570495	186,32
	M 22 S (PR-2B)	Z8	574742 R	124,51		TH 32		570480	186,32
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96		TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58
heima24	TH 16*	20	570460	186,32		TH 63 (PZ-S)		572405	645,58
	TH 20*		570470	186,32		TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 26* TH 32		570475 570480	186,32 186,32		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 40		570485	246,99		TH 25 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574792 R 574798 R	124,51 136,96
	TH 50 (PZ-S)		572400	645,58		U 16*	20	570765	174,33
	TH 63 (PZ-S) TH 16 S (PR-2B)**	Z8	572405 574782 R	645,58 124,51		U 20*		570775	174,33
	TH 20 S (PR-2B)**	Z8	574702 R 574788 R	124,51		U 25*		570780	174,33
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		U 32		570785	204,43
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,96 174,33		U 40 U 50		570790 570795	249,07 298,89
	U 20*		570775	174,33		U 63 (PZ-S)		572365	645,58
HEI IDOMA	U 32		570785	204,43		U 63 (PR-3B)	Z4	572837 R	733,81
HELIROMA Klimapress	U 16* U 20*		570765 570775	174,33 174,33	HED 7 DIDEELY	U 75 (PR-3B)	Z4	572828 R	645,58
aprooc	U 25*		570780	174,33	HERZ PIPEFIX	TH 10* TH 16*		570467 570460	186,32 186,32
	U 32		570785	204,43		TH 20*		570470	186,32
	U 40 U 50		570790 570795	249,07 298,89		TH 26*		570475	186,32
	U 63 (PR-3B)	Z4	572837 R	733,81		TH 32		570480	186,32
	U 63 (PZ-S)	71	572365	645,58		TH 40		570485	246,99
HELIROMA	U 75 (PR-3B) U 16*	74	572828 R 570765	645,58 174,33		TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
Klimapress PPSU	U 20*		570775	174,33		THz 75 (PR-3B)	Z4	572829 R	609,25
	U 25*		570780	174,33		TH 10 S (PR-2B)**	Z8	574772 R	124,51
Henco	U 32 TH 14*		570785 570455	204,43 186,32		TH 16 S (PR-2B)**	Z8	574782 R	124,51
×::==	TH 16*		570460	186,32		TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 18*		570465	186,32		TH 32 S (PR-2B)**	Z8	574798 R	136,96
	TH 20* TH 26*		570470 570475	186,32 186,32	HIDRONIX	TH 16*		570460	186,32
	HE 32		571900	223,12	MULTIGAS	TH 20*		570470	186,32
	HEz 40		571904	323,80		TH 26*		570475	186,32

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

All prices excl. VAT

215

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
HIDRONIX	TH 14*		570455	186,32
MULTIPIPE	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	H 14* H 16*		570310 570320	168,10
	H 18*		570340	168,10 168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32 U 14*		570380	168,10
	U 16*		570760 570765	174,33 174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 26* ¹²⁾ U 32		570750 570785	204,43 204,43
HIDRONIX	TH 14*		570455	186,32
UNICO	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	H 14*		570310	168,10
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20* H 26*		570350 570370	168,10 168,10
	H 32		570380	168,10
	U 14*		570760	174,33
	U 16*		570765	174,33
	U 18* U 20*		570770 570775	174,33 174,33
	U 26* 12)		570750	204,43
	U 32		570785	204,43
HITEC	TH 14*		570455	186,32
Sistema Multistrato	TH 16* TH 18*		570460 570465	186,32 186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574774 R	136,96
HITHERM-ISOTUBI	M 15		570110	154,61
NUMEPRESS	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	577110 R 579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
HITHERM	M 15		570110	154,61
HTpress	M 18 M 22		570120	154,61
	M 28		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
HITHERM	M 15		570110	154,61
HTfire	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4) Z6 XL3) / Z7 XL 45 kN4)	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
HITHERM HTair	M 15 M 18		570110 570120	154,61 154,61
111011	M 22		570130	154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R	672,57 672,57
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	572708 R 579101 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Hopewell	M 15		570110	154,61
press fit system	M 18 M 22		570120 570130	154,61 154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G) M 42 (PR-3S)	Z2	570170 572706 R	498,19 672,57
hp praski	M 54 (PR-3S) TH 10*	72	572708 R 570467	672,57 186,32
BAVARIA-press	TH 12*		570452	186,32
	TH 14* TH 16*		570455 570460	186,32 186,32
	TH 17* TH 20*		570462 570470	186,32 186,32
	TH 25*		570495	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40	70	570485	246,99
	TH 10 S (PR-2B)** TH 12 S (PR-2B)**	Z8 Z8	574772 R 574776 R	124,51 124,51
	TH 14 S (PR-2B)** TH 16 S (PR-2B)**	Z8 Z8	574778 R 574782 R	124,51 124,51
	TH 17 S (PR-2B)**	Z8	574784 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
	11102 0 (1 11 25)		07477011	100,70
ICMA	H 16*		570320	168,10
Gempiter	H 20* H 25*		570350 570360	168,10 168,10
	H 26*		570370	168,10
	H 32 H 40 (PZ-4G)		570380 570390	168,10 565,67
	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 25*		570495	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,96 174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 26* 12)		570750	204,43
	U 32 U 40		570785 570790	204,43 249,07
	U 50 U 63 (PR-3B)	Z4	570795 572837 R	298,89 733,81
	U 63 (PZ-S)		572365	645,58
ICMA Sempigas	TH 16* TH 20*		570460 570470	186,32 186,32
oop.guo	TH 25*		570495	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
Idrosanitaria	TH 32 S (PR-2B) TH 16*	Z8	574798 R 570460	136,96 186,32
Bonomi Homegas	TH 20* TH 26*		570470 570475	186,32 186,32
nomeyas	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
Idrosanitaria Ronomi	TH 16* TH 18*		570460 570465	186,32
Bonomi Idropress	TH 20*		570470	186,32 186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs/ pressing rings
DROSISTEMI	TH 16*		570460	186,32	IDROTRADE	M 12
Ta-Press	TH 20*		570470	186,32	StormSTEEL1)	M 15
	TH 26*		570475	186,32		M 18
	TH 32		570480	186,32		M 22
	TH 40		570485	246,99		M 28
	TH 50 (PZ-S)		572400	645,58		
	TH 63 (PZ-S)		572405	645,58		М 35
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		M 42 (PR-3S)
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		M 54 (PR-3S)
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		M 76,1 XL (PR-3S)
	TH 32 S (PR-2B)	Z8	574798 R	136,96		M 88,9 G XL (PR-3
	F 16*		570717	177,45		M 108,0 G XL (PR-3
	F 20*		570727	177,45		
	F 26*		570730	191.98		M 12 S (PR-2B)
	F 32		570735	191,98		M 15 S (PR-2B)
	F 16 S (PR-2B)**	Z8	574728 R	124,51		M 18 S (PR-2B)
	F 20 S (PR-2B)**	Z8	574720 R 574730 R	124,51		M 22 S (PR-2B)
						M 28 S (PR-2B)
	F 26 S (PR-2B)**	Z8	574732 R	124,51		M 35 S (PR-2B)
	F 32 S (PR-2B)	Z8	574734 R	136,96	II TA	
	Fz 40		570742	205,47	ILTA	M 15
	Fz 50		570747	311,35	INOX/CHIBRO	M 18
	F 63 (PZ-S)		572385	645,58	Pressfitting Cuni	M 22
	H 16*		570320	168,10		M 28
	H 20*		570350	168,10		M 35
	H 26*		570370	168,10		M 42 (PR-3S)
	H 32		570380	168,10		
	H 40 (PZ-4G)		570390	565,67		M 54 (PR-3S)
	U 16*		570765	174,33		M 76,1 XL (PR-3S)
	U 20*		570775	174,33		M 88,9 G XL (PR-3
	U 26* 12)		570750	204,43		M 108,0 G XL (PR-3
	U 32		570785	204,43		M 15 S (PR-2B)
	U 40		570790	249,07		M 18 S (PR-2B)
	U 50		570795	298,89		M 22 S (PR-2B)
	U 63 (PZ-S)		572365	645,58		
	B 16*		570850	203,40		M 28 S (PR-2B)
	B 20*		570860	203,40		M 35 S (PR-2B)
	B 26		570870	224,16	ILTA	M 15
	B 32		570880	224,16	INOX/CHIBRO	M 18
DROTRADE					Pressfitting inox	M 22
	H 16*		570320	168,10	· · · · · · · · · · · · · · · · · · ·	M 28
Storm Multipinza	H 20*		570350	168,10		
	H 26*		570370	168,10		M 35
	H 32		570380	168,10		M 42 (PR-3S)
	TH 16*		570460	186,32		M 54 (PR-3S)
	TH 20*		570470	186,32		M 76,1 XL (PR-3S)
	TH 26*		570475	186,32		M 88,9 G XL (PR-3
	TH 32		570480	186,32		
	THL 32		570487	186,32		M 108,0 G XL (PR-3
	TH 40		570485	246,99		M 15 S (PR-2B)
	TH 50 (PZ-S)		572400	645.58		M 18 S (PR-2B)
	TH 63 (PZ-S)		572405	645,58		M 22 S (PR-2B)
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		M 28 S (PR-2B)
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		M 35 S (PR-2B)
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		
		Z8	574774 R 574798 R		Instantor	TH 16*
	TH 32 S (PR-2B)	20		136,96	Press System	TH 20*
	U 16*		570765	174,33		TH 26*
	U 20*		570775	174,33		TH 32
DROTRADE	M 15		570110	154,61		TH 16 S (PR-2B)**
StormPRES ¹⁾	M 18		570120	154,61		
	M 22		570130	154,61		TH 20 S (PR-2B)*
	M 28		570140	154,61		TH 26 S (PR-2B)**
	M 35		570150	154,61		TH 32 S (PR-2B)
	M 42 (PR-3S)	72	572706 R	672,57	Instantor	VI 1/2" S (PR-2B)
	M 54 (PR-3S)	72	572708 R	672,57	Copper Press Imperial	
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47	copper riess imperial	
		27 XL 45 kN ⁴⁾				VI 1" S (PR-2B)
	M 88,9 G XL (PR-3S) ⁸⁾		579110 R	1.355,58	Instantor	M 15
	M 108,0 G XL (PR-3S)8)	Z7 XL 45 kN ⁴⁾	579111 R	1.355,58	Copper Press Metric	M 22
	M 15 S (PR-2B)	Z8	574738 R	124,51		M 28
	M 18 S (PR-2B)	Z8	574740 R	124,51		
	M 22 S (PR-2B)	Z8	574742 R	124,51		M 15 S (PR-2B)
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8	574744 R	124,51		M 22 S (PR-2B)

IDROTRADE StormSTEEL ¹⁾	pressing rings M 12 M 15 M 18	adapter tongs	570100 570110	154,6
StormSTEEL ¹⁾			570110	
	M 18		0.0110	154,6
			570120	154,6
	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PR-3S)	72	572706 R	672,5
	M 54 (PR-3S)	72	572708 R	672,5
	M 76,1 XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾	579101 R	1.161,4
	M 88,9 G XL (PR-3S)8)	Z7 XL 45 kN ⁴⁾	579110 R	1.355,5
	M 108,0 G XL (PR-3S)8)	Z7 XL 45 kN ⁴⁾	579111 R	1.355,5
	M 12 S (PR-2B)	Z8	574736 R	124,5
	M 15 S (PR-2B)	Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
ILTA	M 15		570110	154,6
INOX/CHIBRO	M 18		570120	154,6
Pressfitting Cuni	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PR-3S)	72	572706 R	672,5
	M 54 (PR-3S)	72	572708 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,4
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,5
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,5
	M 15 S (PR-2B)	Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
ILTA	M 15		570110	154,6
INOX/CHIBRO	M 18		570120	154,6
Pressfitting inox	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PR-3S)	Z2	572706 R	672,5
	M 54 (PR-3S)	Z2	572708 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,4
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,5
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,5
	M 15 S (PR-2B)	Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
Instantor	TH 16*		570460	186,3
Press System	TH 20*		570470	186.3
	TH 26*		570475	186,3
	TH 32		570480	186.3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
Instantor	VI ½" S (PR-2B)	Z8	574850 R	124,5
Copper Press Imperial		Z8	574852 R	124,5
oobber i reas iiiiheriar	VI 1" S (PR-2B)	Z8	574854 R	124,5
	11 1 U (1 N 2U)	LU	574034 K	154,6
Inetantor	M 15			104,0
Instantor	M 15			151. 4
Instantor Copper Press Metric	M 22		570130	
	M 22 M 28	70	570130 570140	154,6
	M 22	Z8 Z8	570130	154,6 154,6 124,5 124,5

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
IPA IPANA Press	TH 10* TH 11,6*		570467 570482	186,32 186,32
	TH 12*		570452	186,32
	TH 14* TH 15*		570455 570457	186,32 186,32
	TH 16*		570460	186,32
	TH 17* TH 18*		570462 570465	186,32 186,32
	TH 20*		570470	186,32
	TH 22* TH 25*		570472 570495	186,32 186,32
	TH 26*		570475	186,32
	TH 28		570477	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) THz 75 (PR-3B)	74	572405 572829 R	645,58 609,25
	TH 10 S (PR-2B)**	Z8	574772 R	124,51
	TH 11,6 S (PR-2B)** TH 12 S (PR-2B)**	Z8 Z8	574774 R 574776 R	124,51 124,51
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 15 S (PR-2B)** TH 16 S (PR-2B)**	Z8 Z8	574780 R 574782 R	124,51 124,51
	TH 17 S (PR-2B)**	Z8	574784 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 22 S (PR-2B)**	Z8 Z8	574788 R 574790 R	124,51 124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)** TH 28 S (PR-2B)**	Z8 Z8	574794 R 574796 R	124,51 136,96
	TH 32 S (PR-2B)**	Z8	574778 R	136,76
IPA THU	TH 16*		570460	186,32
IPANA Press	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32		570480	186,32
	TH 40 TH 16 S (PR-2B)**	Z8	570485 574782 R	246,99 124.51
	TH 20 S (PR-2B)**	Z8	574782 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
IPALPEX	TH 32 S (PR-2B) TH 14*	Z8	574798 R 570455	136,96 186,32
(Industrie du	TH 16*		570460	186,32
Plastique et	TH 18* TH 20*		570465 570470	186,32 186,32
Accessoires)	TH 26*		570470	186,32
	THL 32		570487	186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58
	TH 63 (PZ-S)		572405	645,58
IPLEX PIPELINES AUSTRALIA Iplex Pro-fit	K16/P18* PF 22*		572600 571980	194,05 209,62
IPLEX	K16/P18*		572600	194,05
PIPELINES AUSTRALIA	K/20* K/25*		572605 572610	194,05 194,05
lplex K1	K32		572615	194,05
(Gas)	K1/40 K1/50		572620 572625	194,05 318,61
IPLEX	K16/P18*		572600	194,05
PIPELINES AUSTRALIA Iplex K2	K/20* K/25*		572605 572610	194,05 194,05
ISOLTUBEX ISOLPEX IPERT	RFz 16* RFz 20*		571325 571330	194,05 194,05
ISULFEX IFER I	RFIz 25		571337	213,78
	RFIz 32		571342	213,78
ISOLTUBEX Multicapa	RFz 16* RFz 18*		571325 571327	194,05 194,05
	RFz 20*		571330	194,05
	RFIz 25 RFIz 32		571337 571342	213,78 213,78
	U 16*		570765	174,33
	U 18*		570770	174,33 174,33
	11 20*		570775	174.33
	U 20* U 25*		570780	174,33
	U 25* U 32		570785	174,33 204,43
	U 25* U 32 U 40		570785 570790	174,33 204,43 249,07
	U 25* U 32	Z 4	570785	174,33 204,43
	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S)	24	570785 570790 570795 572837 R 572365	174,33 204,43 249,07 298,89 733,81 645,58
ISOLTUBEX Multicana GAS	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16*	74	570785 570790 570795 572837 R 572365 571325	174,33 204,43 249,07 298,89 733,81 645,58 194,05
	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RF2 16* RF2 20* RF1z 25	74	570785 570790 570795 572837 R 572365 571325 571330 571337	174,33 204,43 249,07 298,89 733,81 645,58 194,05 194,05 213,78
Multicapa GAS	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 25 RFIz 32	74	570785 570790 570795 572837 R 572365 571325 571330 571337 571342	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 213,78
Multicapa GAS ISOLTUBEX	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RF2 16* RF2 20* RF1z 25	74	570785 570790 570795 572837 R 572365 571325 571330 571337	174,33 204,43 249,07 298,89 733,81 645,58 194,05 194,05 213,78
Multicapa GAS ISOLTUBEX	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 32 U 16* U 20* U 20*	74	570785 570790 570795 572837 R 572365 571325 571330 571337 571342 570765 570775 570780	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 213,78 174,33 174,33
Multicapa GAS ISOLTUBEX Multicapa-PPSU	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 25 RFIz 25 RFIz 32 U 16* U 20* U 25* U 32	74	570785 570790 570795 572837 R 572365 571325 571330 571337 571342 570765 570775 570780	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 213,78 174,33 174,33 174,33 204,43
ISOLTUBEX Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI NUMEPRESS	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 32 U 16* U 20* U 25* U 32 M 15 M 18 ¹⁰	74	570785 570790 570795 572837 R 572365 571325 571330 571337 571342 570775 570780 570780 570780 570110 570120	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 213,78 174,33 174,33 174,33 204,43 154,61
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RF2 16* RF2 20* RFIZ 25 RFIZ 32 U 16* U 20* U 25* U 32 M 15 M 18 ¹⁰ M 22	74	570785 570790 570795 572837 R 572857 571325 571330 571337 571342 570765 570775 570780 570785 570110 570120 570130	174,33 204,43 249,07 278,89 733,81 645,58 194,05 213,78 174,33 174,33 174,33 174,33 154,61 154,61
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 30 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 25 RFIz 32 U 16* U 20* U 25* U 32 M 15 M 18* M 22 M 28*	24	570785 570790 570795 572837 R 572845 571330 571337 571342 570765 570775 570780 570780 570110 570120 570120 570140	174,33 204,43 249,07 278,89 733,81 65,58 194,05 213,78 213,78 214,43 174,33 174,33 154,61 154,61 154,61
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RF2 16* RF2 20* RFIz 25 RFIz 32 U 16* U 20* U 25* U 32 M 15 M 18" M 22 M 28" M 35 M 42 (PR-3S)	22	570785 570790 570795 572837 R 572365 571325 571337 571337 571342 570765 5707765 5707780 570780 570100 570140 570150 570160 672706 R	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 213,78 174,33 174,33 204,43 154,61 154,61 154,61 154,61
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 25 RFIz 25 RI 25 U 16* U 20* U 25* U 32 M 15 M 18" M 22 M 28" M 35 M 42 (PR-3S) M 54 (PR-3S)	72 22	570785 570790 570795 572837 R 572845 571325 571330 571337 571342 570765 570775 5707780 570100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701100 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701200 5701	174,33 204,43 249,07 298,89 733,81 645,58 194,05 13,78 213,78 213,78 213,78 174,33 174,33 124,43 154,61 154,61 154,61 154,61 154,61 672,57 672,57
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 32 U 16* U 20* U 25* U 32* U 35* U 32 M 15 M 18" M 22 M 28" M 35 M 42 (PR-3S) M 56,1 XL (PR-3S)	22	570785 570790 570795 572837 R 572865 571325 571330 571337 571342 570765 570775 570780 570120 570120 570130 570150 572706 R 572708 R 579101 R	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 213,78 213,78 174,33 174,33 204,43 154,61 154,61 154,61 154,61 672,57 672,57 1.161,47
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RF2 16* RF2 20* RFIZ 25 RFIZ 32 U 16* U 20* U 25* U 32 M 15 M 18" M 22 M 28" M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 188,9 6 XL (PR-3S) M 108,0 6 XL (PR-3S)	Z2 Z2 Z2 Z6 XL ³ / Z7 XL 45 kN ⁴ Z6 XL ³ / Z7 XL 45 kN ⁴ Z6 XL ³ / Z7 XL 45 kN ⁴	570785 570795 570795 572837 R 572845 571325 571330 571337 571342 570765 570778 570780 570110 570120 570130 570140 570150 572706 R 572708 R 5797101 R 579111 R	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 174,33 174,33 204,43 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 155,61 155,61
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RFz 16* RFz 20* RFIz 32 U 16* U 20* U 25* U 32* U 35* U 32* U 40* U 40* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U 50* U	Z2 Z2 Z6 XL ³¹ / Z7 XL 45 kN ⁴¹ Z6 XL ³¹ / Z7 XL 45 kN ⁴¹ Z6 XL ³¹ / Z7 XL 45 kN ⁴¹ Z8	570785 570790 570795 572837 R 572365 571330 571330 571337 571342 570765 570775 570780 570100 570120 570130 570140 570150 572706 R 572706 R 572706 R 579101 R 579110 R 579110 R 579111 R 579111 R	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 213,78 213,78 174,33 174,33 204,43 154,61 154,61 154,61 154,61 154,61 154,61 155,58 1,355,58
Multicapa GAS ISOLTUBEX Multicapa-PPSU ISOTUBI	U 25* U 32 U 40 U 50 U 63 (PR-3B) U 63 (PZ-S) RF2 16* RF2 20* RFIZ 25 RFIZ 32 U 16* U 20* U 25* U 32 M 15 M 18" M 22 M 28" M 35 M 42 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 188,9 6 XL (PR-3S) M 108,0 6 XL (PR-3S)	Z2 Z2 Z2 Z6 XL ³ / Z7 XL 45 kN ⁴ Z6 XL ³ / Z7 XL 45 kN ⁴ Z6 XL ³ / Z7 XL 45 kN ⁴	570785 570795 570795 572837 R 572845 571325 571330 571337 571342 570765 570778 570780 570110 570120 570130 570140 570150 572706 R 572708 R 5797101 R 579111 R	174,33 204,43 249,07 298,89 733,81 645,58 194,05 213,78 174,33 174,33 204,43 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 155,61 155,61

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	
VAR	B 20	,	570860	203,
ALPEX-GAS	B 26		570870	224,
VA D	B 32		570880	224,
VAR var-Press	B 14* B 16*		570845 570850	203, 203,
vai 11000	B 18*		570855	203,
	B 20*		570860	203,
	B 26		570870	224,
	B 32		570880	224,
	Fz 40 Fz 50		570742 570747	205, 311,
	F 63 (PZ-S)		572385	645,
/AR	TH 16*		570460	186
ULTI PRESS	TH 20*		570470	186
AS ITALIA	TH 26*		570475	186
	H 16* H 20*		570320	168
	H 26*		570350 570370	168 168
	U 16*		570765	174
	U 20*		570775	174
'AR	TH 16*		570460	186
ulti Press MP	TH 18*		570465	186
	TH 20*		570470	186
	TH 25* TH 26*		570495 570475	186 186
	TH 32		570480	186
	TH 40		570485	246
	TH 50 (PZ-S)		572400	645
	TH 63 (PZ-S)		572405	645
	TH 16 S (PR-2B)**	Z8	574782 R	124
	TH 18 S (PR-2B)**	Z8	574786 R	124
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124
	TH 25 S (PR-2B)**	28 Z8	574792 R 574794 R	124 124
	TH 32 S (PR-2B)	Z8	574774 R 574798 R	136
	F 16*		570717	177
	F 18*		570720	177
	F 20*		570727	177
	F 26*		570730	191
	F 32		570735	191
	Fz 40 Fz 50		570742 570747	205 311
	F 63 (PZ-S)		572385	645
	F 16 S (PR-2B)**	Z8	574728 R	124
	F 20 S (PR-2B)**	Z8	574730 R	124
	F 26 S (PR-2B)**	Z8	574732 R	124
	F 32 S (PR-2B)	Z8	574734 R	136
	H 16*		570320	168
	H 18* H 20*		570340 570350	168 168
	H 25*		570360	168
	H 26*		570370	168
	H 32		570380	168
	H 40 (PZ-4G)		570390	565
	U 16*		570765	174
	U 18* U 20*		570770 570775	174 174
	U 25*		570780	174
	U 26* 12)		570750	204
	U 32		570785	204
	U 40		570790	249
	U 50		570795	298
	U 63 (PZ-S)		572365 E700E0	645
	B 16* B 18*		570850 570855	203 203
	B 20*		570860	203
	B 26		570870	224
	B 32		570880	224
AR	TH 16*		570460	186
ulti Press Leak	TH 20*		570470 570475	186
IPL)	TH 26* TH 32		570475 570480	186 186
	TH 16 S (PR-2B)**	Z8	574782 R	124
	TH 20 S (PR-2B)**	Z8	574788 R	124
	TH 26 S (PR-2B)**	Z8	574794 R	124
	TH 32 S (PR-2B)	Z8	574798 R	136
	F 16*		570717	177
	F 20* F 26*		570727 570730	177 191
	F 26* F 32		570730 570735	191 191
	F 16 S (PR-2B)**	Z8	574728 R	124
	F 20 S (PR-2B)**	Z8	574730 R	124
	F 26 S (PR-2B)**	Z8	574732 R	124
	F 32 S (PR-2B)	Z8	574734 R	136
	H 16*		570320	168
	H 20*		570350	168
	H 26*		570370 570380	168
	H 32 U 16*		570380 570765	168 174
	U 20*		570775	174
	U 26* ¹²⁾		570750	204
	U 32		570785	204
	B 16*		570850	203,
	B 20*		570860	203
	B 26		570870	224

Art.-No.

570460 570470

570475

570480

570485

574782 R

574788 R

574794 R

574798 R

570310

570320

570330

570340

570350

570370

570380

570790

570795

572365

570110

570120

570130

570140

570150

572706 R

572708 R

579101 R

579110 R

579111 R

574738 R

574740 R

574742 R

574744 R

574746 R

570110

570120

570130

570140

570150

572706 R

572708 R

579101 R

579110 R

579111 R

574738 R

574740 R

574742 R

574744 R

574746 R

570115

570125

570135

570145

570155

570165

570175

572850 R

572851 R

574752 R

574756 R

574758 R

574760 R

574762 R

€ 186,32

186,32

186.32

186 32

246.99

124.51

124,51

124,51

136,96

168 10

168.10

168,10

168,10

168,10

168,10

168 10

249 07

298.89

645,58

154,61

154,61

154,61

154,61

154.61

672 57

672.57

1.161,47

1.355,58

1.355.58

124,51

124,51

124 51

124 51

136,96

154,61

154,61

154.61

154,61

154,61

672 57

672 57

1.161,47

1.355,58

1.355.58

124.51

124,51

124,51

124 51

136,96

154.61

154,61

154.61

154,61

154,61

360.13

322 77

370.51

348,72

124,51

124.51

124,51

124,51

136.96

219

System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs
VAR	TH 16*		570460	186,32	IVT PRIPRESS	TH 16*	
Plastic Multi Press	TH 20*		570470	186,32		TH 20*	
.eak (PMPL)	TH 26*		570475	186,32		TH 26*	
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51		TH 32	
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		TH 40	
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		TH 16 S (PR-2B)**	Z8
	TH 32 S (PR-2B)	Z8	574798 R	136,96		TH 20 S (PR-2B)**	Z8
	F 16*		570717	177,45		TH 26 S (PR-2B)**	Z8
	F 20*		570727	177,45		TH 32 S (PR-2B)	Z8
	F 26*		570730	191,98			
	F 32	70	570735	191,98			J
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51 124,51			•
	F 26 S (PR-2B)**	Z8	574732 R	124,51	Jäger - Aquatec	H 14*	
	F 32 S (PR-2B)	Z8	574734 R	136,96	Aquapress H	H 16*	
	H 16*		570320	168,10		H 17*	
	H 20*		570350	168,10		H 18*	
	H 26*		570370	168,10		H 20*	
	H 32		570380	168,10		H 26*	
	U 16*		570765	174,33		H 32	
	U 20* U 26* ¹²⁾		570775	174,33		U 40	
	U 32		570750 570785	204,43 204,43		U 50	
	B 16*		570765	204,43		U 63 (PZ-S)	
	B 20*		570860	203,40	Jäger - Aquatec	M 15	
	B 26		570870	224,16	C-Stahl -	M 18	
	B 32		570880	224,16	Press Typ M	M 22	
IVAR	TH 16*		570460	186,32	11633 19 14	M 28	
Plastic Multi Press	TH 20*		570470	186,32		M 35	
PMP	TH 25*		570495	186,32		M 42 (PR-3S)	Z2
	TH 26*		570475	186,32		M 54 (PR-3S)	72
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51		M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN
	TH 25 S (PR-2B)**	Z8	574792 R	124,51			Z6 XL ³ / Z7 XL 45 kN
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		M 108,0 G XL (PR-3S)	Z8 Z8
	TH 32 S (PR-2B)	Z8	574798 R	136,96		M 15 S (PR-2B)	
	F 16*		570717	177,45		M 18 S (PR-2B)	Z8 Z8
	F 20*		570727	177,45		M 22 S (PR-2B)	
	F 26*		570730	191,98		M 28 S (PR-2B)	Z8 Z8
	F 32 F 16 S (PR-2B)**	Z8	570735 574728 R	191,98 124,51	12 4 1	M 35 S (PR-2B)	
	F 20 S (PR-2B)**	Z8	574730 R	124,51	Jäger - Aquatec	M 15	
	F 26 S (PR-2B)**	Z8	574732 R	124,51	Edelstahl -	M 18	
	F 32 S (PR-2B)	Z8	574734 R	136,96	Press Typ M	M 22	
	H 16*		570320	168,10		M 28	
	H 20*		570350	168,10		M 35	
	H 25*		570360	168,10		M 42 (PR-3S)	72
	H 26*		570370	168,10		M 54 (PR-3S)	72
	H 32		570380	168,10		M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN
	U 16* U 20*		570765 570775	174,33 174,33		M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN
	U 25*		570780	174,33		M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN
	U 26* ¹²⁾		570750	204,43		M 15 S (PR-2B)	Z8
	U 32		570785	204,43		M 18 S (PR-2B)	Z8
	B 16*		570850	203,40		M 22 S (PR-2B)	Z8
	B 20*		570860	203,40		M 28 S (PR-2B)	Z8
	B 26		570870	224,16		M 35 S (PR-2B)	Z8
	B 32		570880	224,16	Jäger - Aquatec	V 15	
IVT Edelstahl-	M 15		570110	154,61	Kupfer -	V 18	
Presssystem	M 18 ¹⁾		570120	154,61	Press Typ V	V 22	
	M 22 M 28 ¹⁾		570130 570140	154,61 154,61		V 28	
	M 35		570140	154,61		V 35	
	M 42 (PR-3S)	72	572706 R	672,57		V 42	
	M 54 (PR-3S)	72	572708 R	672,57		V 42 (PR-2B)	72
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)		1.161,47		V 54	
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58		V 54 (PR-2B)	72
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)		1.355,58		V 15 S (PR-2B)	Z8
	M 15 S (PR-2B)	Z8	574738 R	124,51		V 18 S (PR-2B)	Z8
	M 18 S (PR-2B)	Z8	574740 R	124,51		V 22 S (PR-2B)	Z8
	M 22 S (PR-2B)	Z8	574742 R	124,51			LU
	M 28 S (PR-2B)	Z8	574744 R	124,51		V 28 S (PR-2B)	Z8

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- ³⁾ Driven by REMS Power-Press XL ACC, see page 188.
- $^{\mbox{\tiny 4)}}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}$ For making press joints for operating pressure \leq PN 10.
- $^{9)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{10)}$ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\ensuremath{\cancel{1}}$ G" on the pressing jaws for gas installations.
- $^{12)}$ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Jansen AG JANSEN COMISA	TH 14* TH 16*		570455 570460	186,32 186,32
JANSEN COMISA	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 14 S (PR-2B)**	Z8	572405 574778 R	645,58 124,51
	TH 16 S (PR-2B)**	Z8	574776 R 574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
araflex-	TH 14*	20	570455	186,32
resssystem	TH 16*		570460	186,32
	TH 17* TH 18*		570462 570465	186,32 186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 14 S (PR-2B)**	Z8	572405 574778 R	645,58 124,51
	TH 16 S (PR-2B)**	Z8	574778 R	124,51
	TH 17 S (PR-2B)**	Z8	574784 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574786 R 574788 R	124,51 124,51
	TH 25 S (PR-2B)**	Z8	574766 R 574792 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
UNGWOO	TH 32 S (PR-2B)	Z8	574798 R	136,96
UNGWUU WPress	VUS ½" (OD 15,9 mm) VUS ¾" (OD 22,2 mm)		571770 571775	186,79 186,79
	VUS 1" (OD 28,6 mm)		571780	186,79
	VUS 1¼" (0D 34,9 mm)		571785 571790	186,79
	VUS 1½" (OD 41,3 mm) VUS 2" (OD 54,0 mm)		571790 571795	360,13 370,51
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z 5	572819 R	609,25
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58
· • • • • • • • • • • • • • • • • • • •	K		5505/0	45/ 00
AN AN-therm Press LBP	U 14* U 16*		570760 570765	174,33 174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 26* ¹²⁾ U 32		570750 570785	204,43 204,43
	U 40		570790	249,07
	TH 14*		570455	186,32
	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)	70	572405	645,58
	TH 14 S (PR-2B)** TH 16 S (PR-2B)**	Z8 Z8	574778 R 574782 R	124,51 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
AN	M 15	20	570110	154,61
AN-therm Inox	M 18 ¹⁾		570120	154,61
	M 22 M 28 ¹⁾		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G) M 42 (PR-3S)	72	570170 572706 R	498,19 672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8 Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
AN	M 12		570100	154,61
AN-therm Steel	M 15		570110	154,61
	M 18 ¹⁾ M 22		570120 570130	154,61 154,61
	M 28 ¹⁾		570140	154,61
	M 35		570150	154,61
	M 42 (PZ-4G) M 54 (PZ-4G)		570160 570170	498,19 498,19
	M 42 (PR-3S)	72	570170 572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 88.9 G XL (PR-3S)		0 I I U II	
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 108,0 G XL (PR-3S) M 12 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	574736 R	124,51
	M 108,0 G XL (PR-3S) M 12 S (PR-2B) M 15 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8 Z8	574736 R 574738 R	124,51 124,51
	M 108,0 G XL (PR-3S) M 12 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	574736 R	124,51

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
KAN KAN-therm	U 14* U 16*		570760 570765	174,33 174,33
UltraPRESS	U 20*		570775	174,33
	U 25* U 26* ¹²⁾		570780 570750	174,33 204,43
	U 32		570785	204,43
	U 40		570790	249,07
	TH 14* TH 16*		570455 570460	186,32 186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26* TH 32		570475 570480	186,32 186.32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 14 S (PR-2B)**	Z8	572405 574778 R	645,58 124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8 Z8	574788 R	124,51
	TH 25 S (PR-2B)** TH 26 S (PR-2B)**	Z8	574792 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
KE KELIT COPPERFIX	M 15 M 18		570110	154,61
Kupfer	M 22		570120 570130	154,61 154,61
	M 28		570140	154,61
	M 35	70	570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672.57
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S) M 15 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579111 R 574738 R	1.355,58 124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
KE KELIT	U 16*	20	570765	174,33
KELIT KELOX	U 18*		570770	174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S) U 63 (PR-3B)	Z 4	572365 572837 R	645,58 733,81
	U 75 (PR-3B)	Ž4	572828 R	645,58
KE KELIT	U 16*		570765	174,33
KELOX-PPSU-W	U 18* U 20*		570770 570775	174,33 174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40 U 50		570790 570795	249,07 298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	74	572837 R	733,81
KE KELIT	U 75 (PR-3B) U 16*	24	572828 R 570765	645,58 174,33
KELOX-ULTRAX	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25* U 32		570780 570785	174,33 204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S) U 63 (PR-3B)	Z 4	572365 572837 R	645,58 733,81
	U 75 (PR-3B)	Z4	572828 R	645,58
KE KELIT	U 16*		570765	174,33
KELOX-ULTRAX-W	U 18* U 20*		570770 570775	174,33 174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40 U 50		570790 570795	249,07 298,89
	U 63 (PZ-S)		572365	645,58
	U 63 (PR-3B)	24	572837 R	733,81
KE KELIT	U 75 (PR-3B) U 16*	24	572828 R 570765	645,58 174,33
KELOX-WINDOX-U	U 18*		570770	174,33
	U 20*		570775	174,33
	U 25* U 32		570780 570785	174,33 204,43
	U 40		570790	249,07
	U 50 U 43 (P7_S)		570795	298,89
	U 63 (PZ-S) U 63 (PR-3B)	Z 4	572365 572837 R	645,58 733,81
	U 75 (PR-3B)	Z4 Z4	572828 R	645,58
KE KELIT	M 15		570110	154,61
steelFIX C-Stahl	M 18 M 22		570120 570130	154,61 154,61
•	M 28		570140	154,61
	M 35	70	570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8 Z8	574742 R 574744 R 574746 R	124,51 124,51 136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	
KE KELIT	M 15	auapter tongs	570110	154,6
steelFIX	M 18		570120	154,6
Edelstahl	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PR-3S)	72	572706 R	672,5
	M 54 (PR-3S)	72	572708 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,4 1.355,5
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 K 579111 R	1.355,5
	M 15 S (PR-2B)	Z8 Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,
	M 22 S (PR-2B)	Z8	574742 R	124,
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
KEMBLA	VAU 15 (OD 12,7 mm)		572687	159,8
KemPress	VAU 20 (OD 19,1 mm)		572689	159,8
(AUS)	VAU 25 (OD 25,4 mm)		572691	159,8
	VAU 32 (OD 31,8 mm)		572693	168,
	VAU 40 (OD 38,1 mm)		572695	249,0
VENDI A	VAU 50 (OD 50,8 mm)		572697	441,1
KEMBLA KemPress Gas	VAU 15 (OD 12,7 mm)		572687	159,8
(AUS)	VAU 20 (OD 19,1 mm) VAU 25 (OD 25.4 mm)		572689 572691	159,8 159,8
(AU3)	VAU 32 (OD 31,8 mm)		572693	168.1
	VAU 40 (OD 38,1 mm)		572695	249,1
	VAU 50 (OD 50,8 mm)		572697	441,1
KISAN	KI 16*		571360	197.
Kisan KD	KI 20*		571370	197,
Visali KD	KI 25*		571375	197,
	TH 16*		570460	186,3
	TH 20*		570470	186,3
	TH 25*		570495	186,3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
V10.4.N	TH 25 S (PR-2B)**	Z8	574792 R	124,5
KISAN Kisan WL	KI 16* KI 20*		571360 571370	197,1 197,1
KISAN WL	KI 25*		571375	197,
	KI 32		571380	265.
	TH 16*		570460	186,
	TH 20*		570470	186,
	TH 25*		570495	186,
	TH 32		570480	186,
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 25 S (PR-2B)**	Z8	574792 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
KISAN	KI 16*		571360	197,
Kisan WM	KI 20*		571370	197,1
	KI 25* KI 32		571375	197,
	*** **		571380	265,
VICAN			570775	174,
KISAN Kisan WP	U 20*			
	U 25*		570780 570785	
	U 25* U 32		570785	204,
	U 25* U 32 U 40		570785 570790	204, 249,
	U 25* U 32		570785	204,4 249,1 298,1
	U 25* U 32 U 40 U 50		570785 570790 570795	204,4 249,1 298,1 645,1
	U 25* U 32 U 40 U 50 U 63 (PZ-S)		570785 570790 570795 572365	204,, 249,, 298,, 645,, 645,
	U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B)		570785 570790 570795 572365 572828 R	204, 249, 298, 645, 645, 186,
	U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B) TH 20*		570785 570790 570795 572365 572828 R 570470	204, 249, 298, 645, 645, 186,
KISAN Kisan WR	U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B) TH 20* TH 25*		570785 570790 570795 572365 572828 R 570470 570495	204, 249, 298, 645, 645, 186, 186,
	U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B) TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S)		570785 570790 570795 572365 572828 R 570470 570495 570480 570485 572400	174,: 204,4 249,1 298,6 645,! 645,! 186,: 186,: 246,6
	U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B) TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S)		570785 570790 570795 570795 572865 572828 R 570470 570495 570480 570485 572400 572405	204,. 249,! 298,! 645,! 186,: 186,: 246, 645,!
	U 25* U 32 U 40 U 50 U 63 (PZ-S) U 75 (PR-3B) TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S)	28 28	570785 570790 570795 572365 572828 R 570470 570495 570480 570485 572400	204,. 249,! 298,! 645,! 186,. 186,. 246,! 645,!

KISAN Kistal C	pressing rings	Driven by adapter tongs	ArtNo.	€
Kistal C	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	72 21 31 4 77 21 4 51 146	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8 727 XL 43 KN	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574740 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
KISAN	M 15		570110	154,61
Kistal Inox	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
	L			
LEGEND-PRESS	VUS ½" (OD 15,9 mm)		571770	186,79
press fitting	VUS 3/4" (OD 22,2 mm)		571775	186,79
system	VUS 1" (OD 28,6 mm)		571780	186,79
	VUS 1¼" (OD 34,9 mm)		571785	186,79
	VUS 1½" (OD 41,3 mm)		571790	360,13
	VUS 2" (OD 54,0 mm)		571795	370,51
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5 	572820 R	609,25
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58
LK Systems	V 12		570107	154,61
LK >B <press< td=""><td>V 15</td><td></td><td>570115</td><td>154,61</td></press<>	V 15		570115	154,61
	V 18		570125	154,61
	V 22 V 28		570135 570145	154,61
	V 35		570145	154,61 154,61
	V 42		570165	360,13
	V 54		570175	370,51
		70	574748 R	
				12/, 51
	V 12 S (PR-2B)	Z8 78		
	V 12 S (PR-2B) V 15 S (PR-2B)	Z8	574752 R	124,51
	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51
	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B)	Z8 Z8 Z8	574752 R 574756 R 574758 R	124,51 124,51 124,51
	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574752 R 574756 R 574758 R 574760 R	124,51 124,51 124,51 124,51
LK Systems	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R	124,51 124,51 124,51 124,51 136,96
LK Systems LK >B+Press	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R	124,51 124,51 124,51 124,51 136,96
	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 25 S (PR-2B) V 35 S (PR-2B) V 12	Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R 570107	124,51 124,51 124,51 124,51 136,96 154,61
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22</td><td>Z8 Z8 Z8 Z8</td><td>574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115</td><td>124,51 124,51 124,51 124,51 136,96 154,61 154,61</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22	Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115	124,51 124,51 124,51 124,51 136,96 154,61 154,61
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28</td><td>Z8 Z8 Z8 Z8</td><td>574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145</td><td>124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28	Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145	124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 28 S (PR-2B) V 28 S (PR-2B) V 15 V 15 V 18 V 22 V 28 V 35</td><td>Z8 Z8 Z8 Z8</td><td>574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145 570155</td><td>124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 28 S (PR-2B) V 28 S (PR-2B) V 15 V 15 V 18 V 22 V 28 V 35	Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145 570155	124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42</td><td>Z8 Z8 Z8 Z8</td><td>574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570145 570145 570155 570165</td><td>124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 154,61 360,13</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42	Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570145 570145 570155 570165	124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 154,61 360,13
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42 V 54</td><td>28 28 28 28 28</td><td>574752 R 574756 R 574758 R 574760 R 574760 R 570107 570115 570125 570125 570135 570145 570165 570175</td><td>124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 370,51</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42 V 54	28 28 28 28 28	574752 R 574756 R 574758 R 574760 R 574760 R 570107 570115 570125 570125 570135 570145 570165 570175	124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 370,51
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 12 S (PR-2B)</td><td>28 28 28 28 28</td><td>574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570145 570155 570165 570175 574748 R</td><td>124,51 124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 12 S (PR-2B)	28 28 28 28 28	574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570145 570155 570165 570175 574748 R	124,51 124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 28 S (PR-2B) V 28 S (PR-2B) V 15 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B)</td><td>Z8 Z8 Z8 Z8 Z8 Z8</td><td>574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145 570155 570165 570165 570175 574748 R 574752 R</td><td>124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 370,51 124,51</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 28 S (PR-2B) V 28 S (PR-2B) V 15 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B)	Z8 Z8 Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145 570155 570165 570165 570175 574748 R 574752 R	124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 370,51 124,51
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B)</td><td>28 28 28 28 28 28 28</td><td>574752 R 574756 R 574758 R 574760 R 574760 R 570107 570115 570125 570135 570145 570145 570175 570175 574748 R 574752 R 574756 R</td><td>124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 124,51</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B) V 12 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 18 S (PR-2B)	28 28 28 28 28 28 28	574752 R 574756 R 574758 R 574760 R 574760 R 570107 570115 570125 570135 570145 570145 570175 570175 574748 R 574752 R 574756 R	124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 124,51
LK >B <press< td=""><td>V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 28 S (PR-2B) V 28 S (PR-2B) V 15 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B)</td><td>Z8 Z8 Z8 Z8 Z8 Z8</td><td>574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145 570155 570165 570165 570175 574748 R 574752 R</td><td>124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 370,57 124,51</td></press<>	V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 28 S (PR-2B) V 28 S (PR-2B) V 15 V 15 V 18 V 22 V 28 V 35 V 42 V 54 V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B) V 15 S (PR-2B)	Z8 Z8 Z8 Z8 Z8 Z8	574752 R 574756 R 574758 R 574760 R 574762 R 570107 570115 570125 570135 570145 570155 570165 570165 570175 574748 R 574752 R	124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 360,13 370,57 124,51

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
LK Systems	V 15	auapter tongs	570115	154,61
LK >B <press< td=""><td>V 18</td><td></td><td>570125</td><td>154,61</td></press<>	V 18		570125	154,61
Gas	V 22 V 28		570135 570145	154,61 154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 54 V 15 S (PR-2B)	Z8	570175 574752 R	370,51 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B) V 35 S (PR-2B)	Z8 Z8	574760 R 574762 R	124,51 136,96
LK Systems	TH 16*	20	570460	186,32
LK Universal	TH 20*		570470	186,32
	TH 25* TH 32		570495 570480	186,32
	TH 40		570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
		М		
MAINCOR Mainpress	U 16* U 20*		570765 570775	174,33 174,33
	U 25*		570780	174,33
	U 32 U 40		570785 570790	204,43 249,07
	U 50		570795	298,89
	U 63 (PZ-S)		572365	645,58
MAINCOD	U 63 (PR-3B)	Z4	572837 R	733,81
MAINCOR Mainflor	U 16* U 20*		570765 570775	174,33 174,33
Mair Heiztechnik	H 11,5*		570315	168,10
M-Press	TH 16*		570460	186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
Ma.s.ter System PRESSMASTER	TH 14* TH 16*		570455 570460	186,32 186,32
RESSMASTER	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 25* TH 26*		570495 570475	186,32 186,32
	TH 32		570473	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 14 S (PR-2B)**	Z8	572405 574778 R	645,58 124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8 Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8	574788 R 574792 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 14* H 16*		570310 570320	168,10 168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	H 40 (PZ-4G)		570390	565,67
	U 14*		570760	174,33
	U 16* U 18*		570765 570770	174,33 174.33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32 U 40		570785 570790	204,43 249,07
	U 50		570795	249,07
	U 63 (PR-3B)	Z4	572837 R	733,81
Meier Tobler	U 63 (PZ-S)		572365	645,58
	U 1/*		570320 570350	168,10
	H 16* H 20*			198 111
Metalplast - Stramax	H 16* H 20* H 25*		570360	168,10 168,10
Metalplast - Stramax	H 20* H 25* H 32		570380	168,10 168,10
Metalplast - Stramax	H 20* H 25* H 32 RFz 16*		570380 571325	168,10 168,10 194,05
Metalplast - Stramax	H 20* H 25* H 32		570380	168,10 168,10
Metalplast - Stramax	H 20* H 25* H 32* H 32 RFz 16* RFz 20* RFz 25 RFz 32		570380 571325 571330 571335 571340	168,10 168,10 194,05 194,05 194,05 194,05
Metalplast - Stramax	H 20* H 25* H 32 RF2 16* RF2 20* RF2 25 RF2 32 TH 16*		570380 571325 571330 571335 571340 570460	168,10 168,10 194,05 194,05 194,05 194,05 186,32
Metalplast - Stramax	H 20* H 25* H 32* H 32 RFz 16* RFz 20* RFz 25 RFz 32		570380 571325 571330 571335 571340	168,10 168,10 194,05 194,05 194,05 194,05
Metalplast - Stramax	H 20* H 25* H 32* RFz 16* RFz 20* RFz 25 RFz 32 TH 16* TH 20* TH 25* TH 32		570380 571325 571330 571335 571340 570460 570470 570495 570480	168,10 168,10 194,05 194,05 194,05 194,05 186,32 186,32 186,32
Metalplast - Stramax	H 20° H 25° H 25° RF2 16° RF2 20° RF2 25 RF2 32 TH 16° TH 20° TH 25° TH 32 TH 40		570380 571325 571330 571335 571340 570460 570470 570495 570480 570485	168,10 168,10 194,05 194,05 194,05 194,05 186,32 186,32 186,32 186,32 246,99
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 32 TH 16* TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S)		570380 571325 571330 571335 571340 570460 570470 570495 570480 570485 572400	168,10 168,10 194,05 194,05 194,05 194,05 186,32 186,32 186,32 246,99 645,58
Metalplast - Stramax	H 20° H 25° H 25° RF2 16° RF2 20° RF2 25 RF2 32 TH 16° TH 20° TH 25° TH 32 TH 40	28	570380 571325 571330 571335 571340 570460 570470 570495 570480 570485	168,10 168,10 194,05 194,05 194,05 194,05 186,32 186,32 186,32 186,32 246,99
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 32 TH 16* TH 20* TH 25* TH 32 TH 30* TH 40 TH 50 (PZ-S) TH 65 (PR-2B)** TH 20 S (PR-2B)**	Z8	570380 571325 571330 571335 571340 570460 570470 570495 570480 570485 572405 572405 574782 R	168.10 168.10 194.05 194.05 194.05 194.05 186.32 186.32 246.99 645.58 645.58 124.51
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 22 RFz 32 TH 16* TH 20* TH 55* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 63 (PZ-S) TH 10 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	570380 571325 571330 571335 571340 570460 570470 570495 570485 570485 572400 572405 574782 R 574782 R	168.10 168.10 194.05 194.05 194.05 186.32 186.32 186.32 246.99 645.58 645.58 124.51 124.51
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 25 RFz 32 TH 16* TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 16 S (PR-2B)** TH 25 (PR-2B)** TH 32 S (PR-2B) TH 32 S (PR-2B)	Z8	570380 571325 571330 571335 571340 570460 570470 570495 570480 572400 572405 574782 R 574782 R 574789 R	168.10 168.10 194.05 194.05 194.05 186.32 186.32 186.32 246.79 645.58 645.58 124.51 124.51 124.51
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 220* RFz 32 TH 16* TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 63 (PZ-S) TH 16 S (PR-ZB)** TH 25 S (PR-ZB)** TH 25 S (PR-ZB)** TH 32 S (PR-ZB) U 16*	Z8 Z8	570380 571325 571330 571335 571340 570460 570470 570495 570485 570485 572400 572405 574782 R 574782 R	168,10 168,10 194,05 194,05 194,05 186,32 186,32 186,32 246,99 645,58 645,58 124,51 124,51 124,51 136,96
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 25 RFz 32 TH 16* TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 16 S (PR-2B)** TH 25 (PR-2B)** TH 25 (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)**	Z8 Z8	570380 571325 571330 571335 571340 570460 570470 570495 570485 570485 572400 572405 574782 R 574788 R 574792 R 574798 R 570765 570775	168,10 168,10 194,05 194,05 194,05 186,32 186,32 246,99 645,58 645,58 124,51 124,51 124,51 124,51 124,53 174,33 174,33
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 32 TH 16* TH 20* TH 25* TH 32 TH 30 TH 40 TH 50 (PZ-S) TH 63 (PR-2B)** TH 20 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)**	Z8 Z8	570380 571325 571330 571335 571340 570460 570470 570495 570485 572400 572405 574782 R 574792 R 574798 R 574798 R 574798 R 570775 570780 570785	168.10 194.05 194.05 194.05 194.05 186.32 186.32 246.99 645.58 645.58 124.51 124.51 136.94 174.33 174.33 174.33 204.43
Metalplast - Stramax	H 20* H 25* H 32 RFz 16* RFz 20* RFz 25 RFz 32 TH 16* TH 20* TH 25* TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 16 S (PR-2B)** TH 25 (PR-2B)** TH 25 (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)** TH 32 S (PR-2B)**	Z8 Z8	570380 571325 571330 571335 571340 570460 570470 570495 570485 570485 572400 572405 574782 R 574788 R 574792 R 574798 R 570765 570775	168,10 168,10 194,05 194,05 194,05 186,32 186,32 246,99 645,58 645,58 124,51 124,51 124,51 124,51 124,53 174,33 174,33
Metalplast - Stramax Serie MM	H 20* H 25* H 32 RFz 16* RFz 20* RFz 220* RFz 32 TH 16* TH 20* TH 25* TH 32 TH 32 TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 63 (PZ-S) TH 65 (PR-2B)** TH 25 (PR-2B)** TH 32 (PR-2B)** TH 32 (PR-2B) U 16* U 20* U 20* U 32 U 40	Z8 Z8	570380 571325 571330 571335 571340 570460 570470 570495 570480 570485 572400 572405 572405 574782 R 574782 R 574792 R 574798 R 570775 570780 570785 570785	168,10 168,10 194,05 194,05 194,05 186,32 186,32 186,32 246,99 645,58 645,58 124,51 124,51 124,51 124,51 136,96 174,33 174,33 204,43

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
METALGRUP	U 16*		570765	174,33
Permatubo	U 18*		570770	174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
METALGRUP	U 63 (PZ-S) RFz 16*		572365 571325	645,58
METALGRUP PexGrup	RFz 20*		571325	194,05 194,05
ологир	RFz 25		571335	194,05
	RFz 32		571340	194,05
METALGRUP	U 16*		570765	174,33
MultiGrup	U 18*		570770	174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 32		570785	204,43
Aueller Streamline	VUS 1/2" (OD 15,9 mm)		571770	186,79
PRS Copper Press	VUS ¾" (OD 22,2 mm)		571775	186,79
	VUS 1" (OD 28,6 mm)		571780	186,79
	VUS 1¼" (OD 34,9 mm)		571785	186,79
	VUS 1½" (0D 41,3 mm) VUS 2" (0D 54,0 mm)		571790 571795	360,13 370.51
	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609.25
	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609.25
	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5	572821 R	645,58
MULTITHERM	TH 16*		570460	186,32
PRESSSYSTEM	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	THz 75 (PR-3B)	Z4	572829 R	609,25
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
Multicapas Industrial	TH 32 S (PR-2B) RFz 16*	Z8	574798 R 571325	136,96 194,05
MULLICAPAS IIIUUSLI IAL NIS PEX	RFz 20*		571330	194,05
IS PEX	RFz 25		571335	194,05
	RFz 32		571340	194,05
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25* U 32		570780 570785	174,33 204,43
Multicapas Industrial			570320	168.10
AIS XPRT	H 20*		570350	168,10
	H 25*		570360	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	RFz 16*		571325	194,05
	RFz 20* RFz 25		571330 571335	194,05 194,05
	RFz 32		571340	194,05
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	THz 75 (PR-3B)	Z 4	572829 R	609,25
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
	U 16*	20	570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PZ-S) U 63 (PR-3B)	Z 4	572365 572837 R	645,58 733,81
	U 75 (PR-3B)	Z4 Z4	572837 R 572828 R	/33,81 645,58
Multicapas Industrial			570765	174,33
nultitubo systems MC			570770	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795 572365	298,89
	II 63 (P7-S)			
	U 63 (PZ-S) U 63 (PR-3B)	Z 4	572837 R	645,58 733,81

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Multicapas Industr	ial H16*	-	570320	168,10	NUPI Industrie	B 16*		570850	203,40
multitubo systems			570350	168,10	Italiane Multinupi	B 18* B 20*		570855 570860	203,40 203,40
	H 25* H 26*		570360 570370	168,10 168,10	Muttiliupi	B 26		570870	224,16
	H 32		570370	168,10		B 32		570880	224,16
	п 32 RFz 16*		571325	194,05		F 16*		570717	177,45
	RFz 20*		571330	194,05		F 18*		570720	177,45
	RFz 25		571335	194,05		F 20*		570727	177,45
	RFz 32		571340	194,05		F 26*		570730	191,98
	TH 16*		570460	186,32		F 32 F 16 S (PR-2B)**	Z8	570735 574728 R	191,98 124,51
	TH 20*		570470	186,32		F 20 S (PR-2B)**	Z8	574730 R	124,51
	TH 25*		570495	186,32		F 26 S (PR-2B)**	Z8	574732 R	124,51
	TH 26*		570475	186,32		F 32 S (PR-2B)	Z8	574734 R	136,96
	TH 32		570480	186,32		H 16*		570320	168,10
	TH 40		570485	246,99		H 18*		570340	168,10
	TH 50 (PZ-S)		572400	645,58		H 20* H 25*		570350 570360	168,10 168,10
	TH 63 (PZ-S)	7/	572405	645,58		H 26*		570370	168,10
	THz 75 (PR-3B) TH 16 S (PR-2B)**	Z4 Z8	572829 R 574782 R	609,25 124,51		H 32		570380	168,10
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		TH 16*		570460	186,32
	TH 25 S (PR-2B)**	Z8	574792 R	124,51		TH 18*		570465	186,32
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		TH 20*		570470	186,32
	TH 32 S (PR-2B)	Z8	574798 R	136,96		TH 25*		570495	186,32
	U 16*		570765	174,33		TH 26* TH 32		570475 570480	186,32 186,32
	U 20*		570775	174,33		TH 16 S (PR-2B)**	Z8	574782 R	124,51
	U 25*		570780	174,33		TH 18 S (PR-2B)**	Z8	574786 R	124,51
	U 32		570785	204,43		TH 20 S (PR-2B)**	Z8	574788 R	124,51
	U 40		570790	249,07		TH 25 S (PR-2B)**	Z8	574792 R	124,51
	U 50		570795	298,89		TH 26 S (PR-2B)**	Z8	574794 R	124,51
	U 63 (PZ-S)		572365	645,58		TH 32 S (PR-2B) U 14*	Z8	574798 R 570760	136,96 174,33
	U 63 (PR-3B)	Z4 Z4	572837 R	733,81		U 16*		570765	174,33
	U 75 (PR-3B)		572828 R 570460	645,58 186,32		U 18*		570770	174,33
multipipe Deutschl multipipe mp	TH 20*		570470	186,32		U 20*		570775	174,33
muttipipe mp	TH 26*		570475	186,32		U 25*		570780	174,33
	TH 32		570480	186,32		U 26* 12)		570750	204,43
	TH 40		570485	246,99		U 32		570785	204,43
	TH 50 (PZ-S)		572400	645,58		U 40 U 50		570790 570795	249,07 298,89
	TH 63 (PZ-S)		572405	645,58		U 63 (PR-3B)	Z 4	572837 R	733,81
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		U 63 (PZ-S)	- ·	572365	645,58
	TH 20 S (PR-2B)**	Z8	574788 R	124,51	Nussbaum	VMP 3/8" (0D 17,2 mm)		571740	214,81
	TH 26 S (PR-2B)**	Z8	574794 R	124,51	Optifitt-Press	VMP ½" G (OD 21,3 mm)		571766 R	214,81
	TH 32 S (PR-2B)	Z8	574798 R	136,96		VMPz 3/4" (0D 26,9 mm)		571764	214,81
		NI				VMPz 1" (0D 33,7 mm) VMPz 11/4" (PZ-S) (0D 42,4 mm)		571767 572413	214,81 704,75
		N				VMPz 1½" (PR-3B) (0D 48,3 mm)	Z 5	572844 R	479,50
NEUTHERM	H 16*		570320	168,10		VMPz 2" (PR-3B) (0D 60,3 mm)	Z5	572845 R	479,50
MEKUPRESS-HT	H 20*		570350	168,10	Nussbaum	VRX 16		571750	196,13
	H 26*		570370	168,10	Optiflex-Flowpress	VRX 20		571752	196,13
	H 32		570380	168,10		VRX 25		571754	214,81
	H 40 (PZ-4G)		570390	565,67		VRX 32 VRX 40		571756 571758	214,81 298,89
	U 40		570790	249,07		VRX 50		571760	348,72
NIBCO	VUS ½" (OD 15,9 mm)		571770	186,79		VRX 63		571797	560,47
Press System	VUS ¾" (OD 22,2 mm)		571775	186,79	Nussbaum	V 15		570115	154,61
Copper	VUS 1" (OD 28,6 mm)		571780	186,79	Optipress	V 18		570125	154,61
	VUS 1¼" (OD 34,9 mm)		571785	186,79	Aquaplus	V 22		570135	154,61
	VUS 1½" (OD 41,3 mm)		571790	360,13		V 28		570145	154,61
NICOLL FLUVO	VUS 2" (OD 54,0 mm)		571795	370,51		V 35 V 42		570155 570165	154,61 360,13
NICOLL FLUXO	TH 16* TH 20*		570460 570470	186,32		V 42 V 42 (PR-2B)	Z2	572850 R	322,77
	TH 26*		570470 570475	186,32 186,32		V 54		570175	370,51
	TH 32		570480	186,32		V 54 (PR-2B)	Z2	572851 R	348,72
	TH 40		570485	246,99		VFz 64,0 (PR-3B)	Z5	572815 R	609,25
	TH 50 (PZ-S)		572400	645,58		VFz 76,1 (PR-3B)	Z5	572816 R	609,25
	TH 63 (PZ-S)		572405	645,58		VFz 88,9 (PR-3B)	Z5	572817 R	645,58
	THz 75 (PR-3B)	Z4	572829 R	609,25		VFz 108,0 (PR-3B) V 15 S (PR-2B)	Z5 Z8	572818 R 574752 R	645,58 124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51		V 18 S (PR-2B)	Z8	574756 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51		V 22 S (PR-2B)	Z8	574758 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51		V 28 S (PR-2B)	Z8	574760 R	124,51
	TH 32 S (PR-2R)	78	574798 R	136 96		V 35 S (PR-2R)	78	574762 R	136.96

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 1) Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.

136,96

- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- $^{\scriptscriptstyle 3)}\,$ Driven by REMS Power-Press XL ACC, see page 188.
- $^{\mbox{\tiny 4)}}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- $^{\rm 5)}~$ For taking suitable pressing inserts.
- 6) Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- $^{9)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{10)}$ For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\ensuremath{\ensuremath{\mathcal{V}}}$ " G" on the pressing jaws for gas installations.
- $^{12)}$ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

All prices excl. VAT

223

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Nussbaum	V 15	auapter tongs	570115	154,61
Optipress-Gaz	V 18 V 22		570125 570135	154,61 154,61
	V 28		570145 570155	154,61
	V 35 V 42		570165	154,61 360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 V 54 (PR-2B)	72	570175 572851 R	348,72
	VFz 64,0 (PR-3B) VFz 76,1 (PR-3B)	Z5 Z5	572815 R 572816 R	609,25 609,25
	VFz 88,9 (PR-3B)	Z 5	572817 R	645,58
	VFz 108,0 (PR-3B) V 15 S (PR-2B)	Z5 Z8	572818 R 574752 R	645,58 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
Nussbaum Optipress-Therm	V 15 V 18		570115 570125	154,61 154,61
	V 22 V 28		570135 570145	154,61
	V 35		570145	154,61 154,61
	V 42 V 42 (PR-2B)	72	570165 572850 R	360,13 322,77
	V 42 (FR-26) V 54	22	572030 K	370,51
	V 54 (PR-2B)	Z2 Z5	572851 R 572815 R	348,72
	VFz 64,0 (PR-3B) VFz 76,1 (PR-3B)	Z 5	572816 R	609,25 609,25
	VFz 88,9 (PR-3B) VFz 108,0 (PR-3B)	Z5 Z5	572817 R 572818 R	645,58 645,58
	VFZ 108,0 (PR-3B) V 15 S (PR-2B)	Z8	572818 R 574752 R	645,58 124,51
	V 18 S (PR-2B)	Z8 Z8	574756 R 574758 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8	574756 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
	0			
Oventrop Cofit P	H 16 A* H 20 A*		570620 570650	214,81 214,81
COILLY	H 26 A*		570670	214,81
	H 32 A		570680	214,81
	H 40 A U 50		570690 570795	373,63 298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
Oventrop	U 63 (PZ-S) H 16 A*		572365 570620	645,58 214,81
Cofit PD	H 20 A*		570650	214,81
Oventrop	H 26 A* H 16 A*		570670 570620	214,81 214,81
Cofit PDK	H 20 A*		570650	214,81
Oventrop Cofit PD-HT	H 16 A* H 20 A*		570620 570650	214,81 214,81
	H 25 A*		570660	214,81
Oventrop	H 32 A H 16 A*		570680 570620	214,81 214,81
Cofit PDK-HT	H 20 A*		570650	214,81
PBTub	RFz 12*		571320	194,05
SERTIPRESS	RFz 16*		571325	194,05
	RFz 20* RFz 25		571330 571335	194,05 194,05
PBTub	М 15		570110	154,61
SERTI-STEEL	M 18 M 22		570120 570130	154,61 154,61
	M 28		570140	154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124.51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Pegler Yorkshire	> Aalberts integrated piping systems	20	074740 K	100,70
PERFEXIM	U 16*		570765	174,33
PERFEKT System	U 20* U 25*		570775 570780	174,33 174,33
	U 32		570785	204,43
PERFEXIM PERFEKT	U 16* U 20*		570765 570775	174,33 174,33
SYSTEM PLUS	U 25*		570780	174,33
	U 32 U 40		570785 570790	204,43 249,07
	U 50		570795	298,89
	U 63 (PZ-S) TH 16*		572365 570460	645,58 186,32
	TH 20*		570460 570470	186,32
	TH 25*		570495 570480	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 16 S (PR-2B)**	Z8	572405 574782 R	645,58 124,51
				,
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8 Z8	574788 R 574792 R	124,51 124,51

	Pressing tongs /	Driven by		
System	pressing rings	adapter tongs	ArtNo.	€
PERFILTUBO PERFILALUPEX	U 16* U 18*		570765 570770	174,33 174,33
	U 20*		570775	174,33
	U 25* U 32		570780 570785	174,33 204,43
	U 40 U 50		570790	249,07
	U 63 (PR-3B)	Z 4	570795 572837 R	298,89 733,81
	U 63 (PZ-S) U 75 (PR-3B)	74	572365 572828 R	645,58 645,58
PERFILTUBO	M 15	24	570110	154,61
PERFILPRESS	M 18 M 22		570120 570130	154,61 154,61
	M 28		570140	154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672.57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S) M 15 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579101 R 574738 R	1.161,47 124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
PEXTUBE PexTube	RFz 16* RFz 20*		571325 571330	194,05 194,05
	RFIz 25		571337	213,78
Pipelife	RFIz 32 M 15		571342 570110	213,78 154,61
C-PRESS	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35	70	570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Pipelife	TH 16*	20	570460	186,32
RADOPRESS	TH 18* TH 20*		570465 570470	186,32 186,32
	TH 26*		570470	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 16 S (PR-2B)**	Z8	572405 574782 R	645,58 124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8 Z8	574798 R	136,96
Pipetec Connect	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 16 S (PR-2B)**	Z8	572405 574782 R	645,58 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
	U 16*		570765	174,33
	U 20* U 32		570775 570785	174,33 204,43
PLASTICA ALFA	TH 16*		570460	186,32
Multypex	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32	70	570480	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
PLASTICA ALFA	TH 32 S (PR-2B) TH 16*	Z8	574798 R 570460	136,96 186,32
Multypex Air	TH 20*		570470	186,32 186,32
	TH 26* TH 32		570475 570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
PLASTICA ALFA	TH 32 S (PR-2B) TH 16*	Z8	574798 R 570460	136,96 186,32
Multypexalfa Gas	TH 20*		570470	186,32
	TH 26*	70	570475	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
DI ACTICA AL CA	TH 26 S (PR-2B)** TH 16*	Z8	574794 R	124,51
PLASTICA ALFA Multypexalfa Gas	TH 20*		570460 570470	186,32 186,32
protek	TH 26*	70	570475 574782 P	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
DI ACTICA ALEA	TH 26 S (PR-2B)**	Z8	574794 R	124,51
PLASTICA ALFA Multypex Plus	TH 16* TH 20*		570460 570470	186,32 186,32
••	TH 26*		570475	186,32
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,32 124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51

System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	•
PLASTICA ALFA	TH 16*		570460	186,3
Multypex Thermo	TH 20*		570470	186,3
	TH 26*		570475 570480	186,3
	TH 32 TH 16 S (PR-2B)**	Z8	574782 R	186,3 124.5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
PLASTICA ALFA	TH 16*		570460 570470	186,3 186.3
Multypex Thermo Plus	TH 26*		570475	186,3
	TH 32		570480	186,3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
DI (071000 FFDD0	TH 32 S (PR-2B)	Z8	574798 R	136,9
PLÁSTICOS FERRO FERROPLAST	U 16* U 20*		570765 570775	174,3
GPF MULT Pressfitting			570780	174,3 174,3
MULTICAPA	U 32		570785	204,4
PLÁSTICOS FERRO	U 16*		570765	174,3
FERROPLAST	U 20*		570775	174,3
GPF PPSU	U 25*		570780	174,3
Pressfitting PEX y MULTICAPA	U 32		570785	204,4
PLÁSTICOS FERRO	RFz 16*		571325	194,0
FERROPLAST GPF PRESS	RFz 20*		571330	194,0
Pressfitting PEX	RFz 25 RFz 32		571335 571340	194,0 194,0
PLUMBING PLUS	K16/P18*		572600	194,0
EZIPEX Crimp	K/20*		572605	194,0
AUS)	K/25*		572610	194,0
	K32		572615	194,0
	K1/40		572620	194,0
PLUMBING PLUS	K1/50 K16/P18*		572625 572600	318,6 194.0
EZIPEX Gas	K/20*		572605	194,0
(AUS)	K/25*		572610	194,0
	K32		572615	194,0
	K1/40		572620	194,0
	K1/50		572625	318,6
PLUMBING PLUS EZIPRESS Gas	VAU 15 (OD 12,7 mm) VAU 20 (OD 19,1 mm)		572687 572689	159,8 159,8
(AUS)	VAU 25 (OD 25,4 mm)		572691	159,8
(A00)	VAU 32 (OD 31,8 mm)		572693	168,1
	VAU 40 (OD 38,1 mm)		572695	249,0
	VAU 50 (OD 50,8 mm)		572697	441,1
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z5	572839 R	609,2
	VAUF 200 (PR-3B) (OD 76,2 mm)	Z5	572840 R	609,2
PLUMBING PLUS	VAUFz 100 (PR-3B) (OD 101,6 mm) VAU 15 (OD 12,7 mm)	Z5	572841 R 572687	645,5 159,8
EZIPRESS Solar	VAU 20 (OD 19.1 mm)		572689	159,8
(AUS)	VAU 25 (OD 25,4 mm)		572691	159,8
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	124,5
	VAU 20 S (PR-2B)** (OD 19,1 mm)	Z8	574806 R	124,5
	VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8	574808 R	136,9
PLUMBING PLUS	VAU 15 (OD 12,7 mm)		572687	159,8
EZIPRESS Water (AUS)	VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm)		572689	159,8 159,8
(AUS)	VAU 32 (OD 31,8 mm)		572691 572693	168,1
	VAU 40 (OD 38,1 mm)		572695	249,0
	VAU 50 (OD 50,8 mm)		572697	441,1
	VAUFz 65 (PR-3B) (OD 63,5 mm)	Z 5	572839 R	609,2
	VAUFz 80 (PR-3B) (OD 76,2 mm)	Z5	572840 R	609,2
	VAUFz 100 (PR-3B) (OD 101,6 mm)	Z5	572841 R	645,5
	VAU 15 S (PR-2B) (OD 12,7 mm)	Z8	574804 R	124,5
	VAU 20 S (PR-2B)** (OD 19,1 mm) VAU 25 S (PR-2B)** (OD 25,4 mm)	Z8 Z8	574806 R 574808 R	124,5 136,9
POLYPIPE	TH 10*	LU	570467	186,3
POLYSURE	TH 15*		570457	186,3
	TH 22*		570472	186,3
	TH 28		570477	186,3

System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	€
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich) POLYSAN- C-Stahl-Press- System M	M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 56,1 XL (PR-3S) M 76,1 XL (PR-3S) M 108,0 G XL (PR-3S) M 108,0 G XL (PR-3S) M 108,0 FR-2B) M 20 S (PR-2B) M 22 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B) M 35 S (PR-2B)	72 72 76 XL ³¹ / 77 XL 45 kN ⁴⁾ 76 XL ³¹ / 77 XL 45 kN ⁴⁾ 76 XL ³¹ / 27 XL 45 kN ⁴⁾ 78 78 78 78 78	570110 570120 570130 570140 570150 572706 R 572706 R 572708 R 579101 R 579111 R 579111 R 579111 R 574738 R 574740 R 574744 R 574746 R	154,61 154,61 154,61 154,61 154,61 672,57 1.161,47 1.355,58 124,51 124,51 124,51 136,96
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich) POLYSAN- Edelstahl Press-System 1.4520	M 15 M 18 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 54 (PR-3S) M 76,1 XL (PR-3S) M 108,0 G XL (PR-3S) M 108,0 G XL (PR-3S) M 108,0 FR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 35 S (PR-2B)	72 72 76 XL ³¹ / 77 XL 45 kN ⁴³ 76 XL ³¹ / 77 XL 45 kN ⁴³ 78 78 78 78 78 78	570110 570120 570120 570130 570140 570150 572706 R 572708 R 579101 R 579111 R 579111 R 574738 R 574740 R 574744 R 574744 R	154,61 154,61 154,61 154,61 154,61 672,57 1.161,47 1.355,58 124,51 124,51 124,51 124,51 136,96
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich) POLYSAN- Edelstahl Press-System Gas	M 15 M 18 M 22 M 22 M 28 M 32 M 42 (PR-3S) M 54 (PR-3S) M 54 (PR-3S) M 55 (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B)	Z2 Z2 Z7 XL 45 kN ⁴⁾ Z7 XL 45 kN ⁴⁾ Z7 XL 45 kN ⁴⁾ Z8 Z8 Z8 Z8 Z8 Z8 Z8	570110 570120 570130 570140 570150 572706 R 572708 R 572708 R 579111 R 579110 R 579110 R 579140 R 574738 R 574740 R 574744 R 574744 R	154,61 154,61 154,61 154,61 154,61 672,57 1.161,47 1.355,58 1.4,51 124,51 124,51 124,51 136,96
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich) POLYSAN- Edelstahl Press-System Wasser	M 15 M 18 M 22 M 28 M 35 M 35 M 42 (PR-3S) M 54 (PR-3S)	72 72 76 XL ³⁾ / 27 XL 45 kN ⁴⁾ 76 XL ³⁾ / 27 XL 45 kN ⁴⁾ 78 XB 78 ZB 78 ZB	570110 570120 570130 570140 570150 572706 R 572706 R 572708 R 57910 R 579110 R 579111 R 579110 R 574738 R 574740 R 574742 R 574744 R 574746 R	154,61 154,61 154,61 154,61 154,61 672,57 672,57 1.161,47 1.355,58 124,51 124,51 124,51 124,51 136,96
POLYSAN Handelsges. m.b.H. & Co KG (Krems/Öster- reich) POLYSAN- Press-System	TH 14* TH 16* TH 16* TH 17* TH 18* TH 20* TH 20* TH 22 TH 32 TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 63 (PZ-S) TH 14 S (PR-ZB)** TH 15 (PR-ZB)** TH 16 S (PR-ZB)** TH 17 S (PR-ZB)** TH 25 (PR-ZB)** TH 25 (PR-ZB)** TH 26 S (PR-ZB)** TH 26 S (PR-ZB)** TH 26 S (PR-ZB)** TH 26 S (PR-ZB)** TH 32 S (PR-ZB)**	Z4 28 28 28 28 28 28 28 28 28	570455 570460 570462 570465 570470 570475 570480 572400 572405 572829 R 57478 R 574782 R 574788 R 574788 R 574788 R 574798 R	186,32 186,32 186,32 186,32 186,32 186,32 246,99 645,58 645,58 645,58 124,51 124,51 124,51 124,51 124,51 124,51

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
POLYSAN Handelsges.	TH 14* TH 16*		570455 570460	186,32 186,32
m.b.H. & Co KG	TH 17*		570462	186,32
(Krems/Oster- reich)	TH 18* TH 20*		570465 570470	186,32 186,32
POLYSAN-Henco- Press-System	TH 26* HE 32		570475 571900	186,32 223,12
r ress-system	HEz 40		571904	323,80
	TH 14 S (PR-2B)** TH 16 S (PR-2B)**	Z8 Z8	574778 R 574782 R	124,51 124,51
	TH 17 S (PR-2B)**	Z8	574784 R	124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574786 R 574788 R	124,51 124,51
POLYSAN (España)	TH 26 S (PR-2B)** U 16*	Z8	574794 R 570765	124,51 174,33
"Rainbow"	U 18*		570770	174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 32 U 40		570785 570790	204,43 249,07
	U 50		570795	298,89
	U 63 (PR-3B) U 63 (PZ-S)	Z4	572837 R 572365	733,81 645,58
Prandelli	H 14*		570310	168,10
Multyrama Pf	H 16* H 18*		570320 570340	168,10 168,10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	U 40 U 50		570790 570795	249,07 298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
Prandelli Multyrama Pfm	H 16* H 18*		570320 570340	168,10 168,10
,	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	TH 16* TH 18*		570460 570465	186,32 186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 16 S (PR-2B)**	Z8	572400 574782 R	645,58 124,51
	TH 18 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574786 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,96 174,33
	U 18*		570770	174,33
	U 20* U 40		570775 570790	174,33 249,07
	U 50 U 63 (PR-3B)	Z 4	570795 572837 R	298,89 733,81
PURMO	F 16*	24	570717	177,45
Cleverfit Radial	F 20* F 26*		570727 570730	177,45 191,98
	F 32	70	570735	191,98
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51 124,51
	F 26 S (PR-2B)** F 32 S (PR-2B)	Z8 Z8	574732 R 574734 R	124,51 136,96
	H 16*	20	570320	168,10
	H 20* H 26*		570350 570370	168,10 168,10
	H 32		570380	168,10
	TH 14* TH 16*		570455 570460	186,32 186,32
	TH 17* TH 20*		570462 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 14 S (PR-2B)**	Z8	572405 574778 R	645,58 124,51
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 17 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574784 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
	U 16*	20	570765	174,33
	U 20* U 32		570775 570785	174,33 204,43
	VP 16*		570910	185,75
	VP 20* VP 25		570915 570920	185,75 185,75
		R		
Raccorderie Metalliche	M 15 M 18		570110 570120	154,61 154,61
aesPRES ¹⁾	M 22		570130	154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S) M 15 S (PR-2B)	72 78	572708 R 574738 R	672,57 124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Raccorderie Metalliche	M 15 M 18	unaptor tongo	570110 570120	154,61 154,61
inoxPRES ¹⁾	M 22 M 28		570130 570140	154,61 154.61
	M 35	70	570150	154,61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S) ⁸⁾ M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾ Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S) ⁸⁾ M 15 S (PR-2B)	Z7 XL 45 kN ⁴⁾ Z8	579111 R 574738 R	1.355,58 124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Raccorderie Metalliche	M 15 M 18	20	570110 570120	154,61
MARINEPRES ¹⁾	M 22		570130	154,61 154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S) ⁸⁾ M 88,9 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾ Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S) ⁸⁾ M 15 S (PR-2B)	Z7 XL 45 kN ⁴⁾ Z8	579111 R 574738 R	1.355,58
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
Raccorderie	M 35 S (PR-2B) M 15	Z8	574746 R 570110	136,96 154,61
Metalliche steelPRES ¹⁾	M 18 M 22		570120 570130	154,61 154,61
	M 28 M 35		570140 570150	154,61 154.61
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,57 672,57
	M 76,1 XL (PR-3S)8)	Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S) ⁸⁾ M 108,0 G XL (PR-3S) ⁸⁾	Z7 XL 45 kN ⁴⁾ Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
RBM Tita-fix	M 35 S (PR-2B) B 14*	Z8	574746 R 570845	136,96
NDM IIId-IIX	B 16*		570850	203,40
	B 18* B 20*		570855 570860	203,40 203,40
	B 26 F 16*		570870 570717	224,16 177,45
	F 18* F 20*		570720 570727	177,45 177,45
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51 124,51
	H 14* H 16*	20	570310 570320	168,10 168,10
	H 18*		570340	168,10
	H 20* H 26*		570350 570370	168,10 168,10
	H 32 TH 14*		570380 570455	168,10 186,32
	TH 16* TH 18*		570460 570465	186,32 186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S) TH 16 S (PR-2B)**	Z8	572405 574782 R	645,58 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B) U 14*	Z8	574798 R 570760	136,96 174,33
	U 16* U 18*		570765 570770	174,33 174,33
RBM Tita-gas	U 20* TH 16*		570775 570460	174,33 186,32
KDM IIIa yas	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
Redi Nicoll Fluxo	TH 14* TH 16*		570455 570460	186,32 186,32
	TH 18* TH 20*		570465 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	THz 75 (PR-3B) TH 16 S (PR-2B)**	Z4 Z8	572829 R 574782 R	609,25 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
Rodi Nicell Floor	TH 32 S (PR-2B)	Z8	574798 R	136,96
Redi Nicoll Fluxo Gas	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26* TH 16 S (PR-2B)**	Z8	570475 574782 R	186,32 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
RIFENG U	U 14*		570760	174,33
PRESS FITTING (F5)	U 16* U 18*		570765 570770	174,33 174,33
(1 3)	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40 U 50		570790	249,07
	U 63 (PZ-S)		570795 572365	298,89 645,58
	U 63 (PR-3B)	24	572837 R	733,81
	U 75 (PR-3B)	24	572828 R	645,58
RIFENG TH	TH 16* TH 20*		570460	186,32
PRESS FITTING (F9)	TH 25*		570470 570495	186,32 186,32
,	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
RIQUIER	RFz 12*		571320	194.05
A SERTIR	RFz 16*		571325	194,05
	RFz 20*		571330	194,05
DIQUIED	RFz 25		571335	194,05
RIQUIER Système multicouche	TH 16* TH 20*		570460 570470	186,32 186,32
oyotomo mattiodadiio	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,96 174,33
	U 20*		570775	174,33
	U 32		570785	204,43
	U 40		570790	249,07
D. I. D. O. I.	U 50		570795	298,89
Roth PressCheck	RN 14* RN 16		572672 572670	174,33 174,33
	RN 17*		572674	174,33
	RN 20*		572676	174,33
	RN 25/26		572678	174,33
	RN 32 RN 40 (PR-3S)	72	572680 572714 R	204,43 672,57
	RN 50 (PR-3S)	72	572714 R	672,57
	RNz 63 (PR-3B)	74	572836 R	733,81
Rubinetterie	M 15		570110	154,61
Bresciane	M 18		570120	154,61
Bonomi TURBO CuNi	M 22 M 28		570130 570140	154,61 154,61
TORDO CUM	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S) M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47 1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³ / Z7 XL 45 kN ⁴	579111 R	1.355,58
	M 15 S (PR-2B)	Z8 727 X2 40 KM	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
Rubinetterie	M 15	20	570110	154,61
Bresciane	M 18		570120	154,61
Bonomi	M 22		570130	154,61
TURBO INOX	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S)	Z2	570150 572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574740 R 574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Rubinetterie	M 15		570110	154,61
Bresciane	M 18		570120	154,61
Bonomi	M 22		570130	154,61
TURBO INOX GAS	M 28 M 35		570140 570150	154,61
	м 42 (PR-3S)	72	572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
Rubinetterie	M 15		570110	154,61
Bresciane	M 18		570120	154,61
Bonomi	M 22		570130	154,61
TURBO STEEL	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S)	72	572700 R 572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
Rubinetterie	B 14*		570845	203,40
Bresciane n:	B 16*		570850	203,40
Bonomi TURBO PRESS	B 18* B 20*		570855 570860	203,40 203,40
TOKDO FKL33	B 26		570870	203,40
	B 32		570880	224,16
	H 14*		570310	168,10
	H 16*		570320	168,10
	H 18*		570340	168,10
	H 20*		570350	168,10
	H 26*		570370	168,10
	H 32		570380	168,10
	TH 14*		570455	186,32
	TH 16*		570460	186,32
	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 14*		570760	174,33
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 26* ¹²⁾		570750 570785	204,43 204,43
Rubinetterie	U 32 TH 16*		570785	186,32
Bresciane	TH 20*		570460	186,32
Bonomi	TH 26*		570475	186,32
TURBO PRESS	TH 32		570480	186,32
GAS	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
		5		
SA.MI PLASTIC	TH 14*	-	570455	186,32
	TH 16* TH 18*		570460 570465	186,32 186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 14 S (PR-2B)**	Z8	574778 R	124,51
	TH 16 S (PR-2B)** TH 18 S (PR-2B)**	Z8 Z8	574782 R 574786 R	124,51 124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
SA.MI PLASTIC	TH 32 S (PR-2B) TH 16*	Z8	574798 R 570460	136,96 186,32
Multistrato Gas	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32	70	570480	186,32
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
SANHA 3fit-Press Pb-free	B 16* B 20*		570850 570860	203,40 203,40
Serie 25000	B 26 B 32		570870 570880	224,16 224.16
	F 16*		570717	177,45
	F 20* F 26*		570727 570730	177,45 191,98
	F 32 Fz 40		570735 570742	191,98 205,47
	Fz 50 F 63 (PZ-S)		570747 572385	311,35 645.58
	F 16 S (PR-2B)** F 20 S (PR-2B)**	Z8 Z8	574728 R 574730 R	124,51
	F 26 S (PR-2B)**	Z8	574732 R	124,51 124,51
	F 32 S (PR-2B) H 16*	Z8	574734 R 570320	136,96 168,10
	H 20* H 26*		570350 570370	168,10 168,10
	H 32 H 40 (PZ-4G)		570380 570390	168,10 565,67
	TH 16*		570460	186,32
	TH 20* TH 26*		570470 570475	186,32 186,32
	TH 32 TH 40		570480 570485	186,32 246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,96 174,33
	U 20* U 26* ¹²⁾		570775 570750	174,33 204,43
	U 32 U 40		570785 570790	204,43 249,07
	U 50	7/	570795	298,89
	U 63 (PR-3B) U 63 (PZ-S)	Z4 	572837 R 572365	733,81 645,58
SANHA 3fit-Press PPSU	B 16* B 20*		570850 570860	203,40 203,40
Serie 35000	B 26 B 32		570870 570880	224,16 224,16
	F 16* F 20*		570717 570727	177,45 177,45
	F 26*		570730	191,98
	F 32 F 16 S (PR-2B)**	Z8	570735 574728 R	191,98 124,51
	F 20 S (PR-2B)** F 26 S (PR-2B)**	Z8 Z8	574730 R 574732 R	124,51 124,51
	F 32 S (PR-2B) H 16*	Z8	574734 R 570320	136,96 168.10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,51 124,51
	TH 20 S (PR-2B)**		574794 R	
	TH 20 S (PR-2B)** TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574798 R	124,51 136,96
	TH 26 S (PR-2B)** TH 32 S (PR-2B) U 16*		574798 R 570765	136,96 174,33
	TH 26 S (PR-2B)** TH 32 S (PR-2B) U 16* U 20* U 26* 12)		574798 R 570765 570775 570750	136,96 174,33 174,33 204,43
SANHA	TH 26 S (PR-2B)** TH 32 S (PR-2B) U 16* U 20* U 26* U 32 VMP ½* G (00 21,3 mm)		574798 R 570765 570775 570750 570785 571766 R	136,96 174,33 174,33 204,43 204,43 214,81
SANHA Heavy Steel Press	TH 26 S (PR-2B)** TH 32 S (PR-2B) U 16* U 20* U 26* 12! U 32		574798 R 570765 570775 570750 570785	136,96 174,33 174,33 204,43 204,43 214,81 214,81
	TH 26 S (PR-2B)** TH 32 S (PR-2B) U 16* U 20* U 26* U 32 VMP ½" G (0D 21,3 mm) VMP2 ¾" (0D 26,9 mm) VMP2 1" (0D 33,7 mm) VMP2 1" (PZ-S) (0D 42,4 mm)	Z8	574798 R 570765 570775 570775 570785 571766 R 571764 571767 572413	136,96 174,33 174,33 204,43 204,43 214,81 214,81 214,81 704,75
Heavy Steel Press	TH 26 5 (PR-2B)** TH 32 5 (PR-2B) U 16* U 20* U 26**20 U 32 VMP ½** 6 (00 21,3 mm) VMP 2 ½** (00 26,9 mm) VMP 1½** (PZ-S) (00 42,4 mm) VMP 2 ½** (PZ-S) (00 48,3 mm) VMP 2 ½** (PR-3B) (00 48,3 mm) VMP 2 ½** (PR-3B) (00 48,3 mm)		574798 R 570765 570775 570750 570785 571766 R 571764 571767 572413 572844 R 572845 R	136,96 174,33 174,33 204,43 204,43 214,81 214,81 704,75 479,50
SANHA Heavy Steel Press	TH 26 S (PR-2B)** TH 32 S (PR-2B) U 16* U 20* U 26* U 32 VMP ½" G (00 21,3 mm) VMP2 ¾" (00 26,9 mm) VMP2 1½" (PR-3B) (00 42,4 mm) VMP2 1½" (PR-3B) (00 48,3 mm) VMP2 1½" (PR-3B) (00 60,3 mm) VMP 2" (PR-3B) (00 60,3 mm) VMP ½" G (00 21,3 mm) VMP ½" G (00 21,3 mm) VMP 24" G (00 26,9 mm)	Z8 Z5	574798 R 570765 570775 570750 570785 571766 R 571764 571767 572413 572844 R 572845 R 571766 R	136,96 174,33 174,33 204,43 204,43 214,81 214,81 704,75 479,50 479,50 214,81 214,81
Heavy Steel Press	TH 26 \$ (PR-2B)** TH 32 \$ (PR-2B) U 16* U 20* U 26* 12) U 32 VMP ½" \$ (00 21,3 mm) VMP2 ¾" (00 26,9 mm) VMP2 1½" (PZ-S) (00 42,4 mm) VMP2 1½" (PZ-S) (00 42,4 mm) VMP2 1½" (PZ-S) (00 43,3 mm) VMP2 1½" (PZ-S) (00 43,3 mm) VMP ½" \$ (00 21,3 mm) VMP \$ (PZ-S) (00 3,3 mm)	Z8 Z5	574798 R 570765 570775 570775 570750 570785 571764 571764 571767 572413 572844 R 572845 R	136,96 174,33 174,33 204,43 204,43 214,81 214,81 704,75 479,50 479,50

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
SANHA-NiroSan	SA 15		570935	185,75
Gas Presssystem Serie 17000	SA 18 SA 22		570940 570945	185,75 185,75
	SA 28 SA 35		570950 570955	185,75 185,75
	M 15		570110	154,61
	M 18 M 22		570120 570130	154,61 154,61
	M 28 M 35		570140 570150	154,61 154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S) M 76,1 XL (PR-3S)	Z2 Z7 XL 45 kN ⁴⁾	572708 R 579101 R	672,57 1.161,47
	M 88,9 G XL (PR-3S) ⁷⁾ M 108,0 G XL (PR-3S) ⁷⁾	Z7 XL 45 kN ⁴⁾ Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
	V 15	20	570115	154,61
	V 18 V 22		570125 570135	154,61 154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42	70	570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 (PR-2B) V 15 S (PR-2B)	Z2 Z8	572851 R 574752 R	348,72 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
SANHA-NiroSan	V 35 S (PR-2B) SA 15	Z8	574762 R 570935	136,96 185,75
Industry	SA 18		570940	185,75
Presssystem Serie 18000	SA 22 SA 28		570945 570950	185,75 185,75
	SA 35 M 15		570955 570110	185,75 154,61
	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	XP 64,0 XL (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R 579101 R	1.056,63 1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
	V 15	20	570115	154,61
	V 18 V 22		570125 570135	154,61 154,61
	V 28 V 35		570145 570155	154,61
	V 42		570155 570165	154,61 360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 (PR-2B) V 15 S (PR-2B)	Z2 Z8	572851 R 574752 R	348,72 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
SANHA-NiroSan-	V 35 S (PR-2B) SA 15	Z8	574762 R 570935	136,96 185,75
Presssystem	SA 18		570940	185,75
Serie 9000	SA 22 SA 28		570945 570950	185,75 185,75
	SA 35 M 15		570955 570110	185,75 154,61
	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	Z2	572708 R	672,57
	XP 64,0 XL (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579100 R 579101 R	1.056,63 1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58 1.355,58
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B) M 22 S (PR-2B)	Z8 Z8	574740 R 574742 R	124,51 124,51
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,51 136,96
	V 15	20	570115	154,61
	V 18 V 22		570125 570135	154,61 154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 (PR-2B) V 15 S (PR-2B)	Z2 Z8	572851 R 574752 R	348,72 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	€
SANHA-NiroSan	SA 15		570935	185,75	SANHA	SA 15		570935	185,75
SF Presssystem	SA 18		570940	185,75	NiroTherm	SA 18		570940	185,75
Serie 19000 (silicone free)	SA 22 SA 28		570945 570950	185,75 185,75	Industry	SA 22		570945	185,75
(Siticolle II ee)	SA 35		570755	185,75	Serie 98000	SA 28		570950	185,75
	M 15		570110	154,61		SA 35		570955	185,75
	M 18		570120	154,61		M 15		570110	154,61
	M 22		570130	154,61		M 18		570120	154,61
	M 28		570140	154,61		M 22		570130	154,61
	M 35	70	570150	154,61		M 28		570140	154,61
	M 42 (PR-3S) M 54 (PR-3S)	Z2 Z2	572706 R 572708 R	672,57 672,57		M 35		570150	154,61
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		M 42 (PR-3S)	72	572706 R	672,57
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58		M 54 (PR-3S)	72	572708 R	672,57
	M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58		M 76,1 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579101 R	1.161,47
	M 15 S (PR-2B)	Z8	574738 R	124,51		M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 18 S (PR-2B)	Z8	574740 R	124,51		M 108,0 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579111 R	1.355,58
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51		M 15 S (PR-2B)	Z8	574738 R	124,51
	M 35 S (PR-2B)	Z8	574744 R	136,96		M 18 S (PR-2B)	Z8	574740 R	124,51
	V 15	20	570115	154,61		M 22 S (PR-2B)	Z8	574742 R	124,51
	V 18		570125	154,61		M 28 S (PR-2B)	Z8	574744 R	124,51
	V 22		570135	154,61		M 35 S (PR-2B)	Z8	574746 R	136,96
	V 28		570145	154,61		V 15		570115	154,61
	V 35		570155	154,61		V 18		570125	154,61
	V 42 V 42 (PR-2B)	72	570165 572850 R	360,13 322,77		V 22		570135	154,61
	V 54	LL	572030 K	370,51		V 28		570145	154,61
	V 54 (PR-2B)	72	572851 R	348,72		V 35		570155	154,61
	V 15 S (PR-2B)	Z8	574752 R	124,51		V 42		570165	360,13
	V 18 S (PR-2B)	Z8	574756 R	124,51		V 42 (PR-2B)	72	572850 R	322,77
	V 22 S (PR-2B)	Z8	574758 R	124,51		V 54		570175	370,51
	V 28 S (PR-2B)	Z8	574760 R 574762 R	124,51		V 54 (PR-2B)	72	572851 R	348,72
SANHA	V 35 S (PR-2B) SA 15	Z8	574762 K 570935	136,96 185,75		V 15 S (PR-2B)	Z8	574752 R	124,51
NiroTherm	SA 18		570940	185,75		V 18 S (PR-2B)	Z8	574756 R	124,51
Serie 91000	SA 22		570945	185,75		V 22 S (PR-2B)	Z8	574758 R	124,51
	SA 28		570950	185,75		V 28 S (PR-2B)	Z8	574760 R	124,51
	SA 35		570955	185,75		V 35 S (PR-2B)	Z8	574762 R	136,96
	M 15		570110	154,61	SANHA-Press	SA 12		570930	269,83
	M 18 M 22		570120 570130	154,61 154,61	Chrom	SA 15		570935	185,75
	M 28		570140	154,61	Serie 16000	SA 18		570940	185,75
	M 35		570150	154,61		SA 22		570945	185,75
	M 42 (PR-3S)	72	572706 R	672,57		SA 28		570950	185,75
	M 54 (PR-3S)	72	572708 R	672,57		M 12		570100	154,61
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47		M 15		570110	154,61
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58		M 18		570120	154,61
	M 108,0 G XL (PR-3S) M 15 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579111 R 574738 R	1.355,58 124,51		M 22		570130	154,61
	M 18 S (PR-2B)	Z8	574730 R	124,51		M 28		570140	154,61
	M 22 S (PR-2B)	Z8	574742 R	124,51		M 12 S (PR-2B)	Z8	574736 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51		M 15 S (PR-2B)	Z8	574738 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96		M 18 S (PR-2B)	Z8	574740 R	124,51
	V 15		570115	154,61		M 22 S (PR-2B)	Z8	574742 R	124,51
	V 18 V 22		570125 570135	154,61 154,61		M 28 S (PR-2B)	Z8	574744 R	124,51
	V 22 V 28		570145	154,61		V 12		570107	154,61
	V 35		570155	154,61		V 15		570115	154,61
	V 42		570165	360,13		V 18		570125	154,61
	V 42 (PR-2B)	72	572850 R	322,77		V 22		570135	154,61
	V 54		570175	370,51		V 28		570145	154,61
	V 54 (PR-2B)	72	572851 R	348,72		V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574752 R 574756 R	124,51 124,51		V 15 S (PR-2B)	Z8	574752 R	124,51
	V 10 S (PR-2B)	Z8	574758 R	124,51		V 18 S (PR-2B)	Z8	574756 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51		V 22 S (PR-2B)	Z8	574758 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96		V 28 S (PR-2B)	Z8	574760 R	124,51

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- $^{9)}$ For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€	System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
SANHA-Press GAS Pressfittings Serie 10000/ Serie 11000	SA 12 SA 14 SA 15 SA 16 SA 16 SA 18 SA 22 SA 28 SA 35 M 12 M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) M 12 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 29 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B)	Z2 Z2 Z8 Z8 Z8 Z8 Z8	570930 570932 570935 570940 570940 570940 570950 570950 570100 570110 570120 570130 570140 570150 572706 R 572708 R 574743 R 574740 R 574744 R 574744 R 574744 R 574746 R 574746 R 574745 R 574745 R 574745 R 574745 R 574745 R 574746 R 574746 R 574746 R 574746 R 574747 R 574745 R 574745 R 574745 R 574746 R 574746 R 574746 R 574746 R 574746 R 574747 S 574747 S 574746 R 574746 R 574746 R 574747 S 574746 R 574746 S 570112 570113 570115 570115	269,83 269,83 185,75 185,75 185,75 185,75 185,75 185,75 154,61 154,61 154,61 154,61 154,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 124,51 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61	SANHA-Press SOLAR Pressfittings Serie 12000/ Serie 13000	SA 12 SA 15 SA 18 SA 22 SA 28 SA 35 M 12 M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) X P 64,0 XL (PR-3S) X P 64,0 XL (PR-3S) M 66,7 XL (PR-3S) M 66,7 XL (PR-3S) M 76,1 XL (PR-3S) M 18,0 G XL (PR-3S) M 18,0 G XL (PR-3S) M 18 S (PR-2B) M 15 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) M 35 S (PR-2B) V 12 V 15 V 18 V 22	72 72 76 XL ³³ / 27 XL 45 kM ⁴³ 76 XL ³³ / 27 XL 45 kM ⁴³ 76 XL ³³ / 27 XL 45 kM ⁴³ 76 XL ³³ / 27 XL 45 kM ⁴³ 76 XL ³³ / 27 XL 45 kM ⁴³ 76 XL ³³ / 27 XL 45 kM ⁴³ 78 78 78 78 78 78 78 78 78 78 78 78	570930 570935 570940 570945 570955 570955 570100 570110 570120 570130 570140 570150 572706 R 572706 R 579100 R 579100 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579104 R 579107 R 579107 R 579107 R 579108 R 579107 R 579108 R 579107 R 579108 R 579107 R 579108 R 579108 R 579107 R 579108 R 579108 R 579107 R 579108 R 579108 R 579107 R 579108 R 579108 R 579107 R 579108 R 579108 R 579107 R 579108 R 579108 R 579107 R 579108 R 579108 R 579107 R 579110 R 579110 R 579110 R 579111 R 574736 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R 574746 R	269,83 185,75 185,75 185,75 185,75 185,75 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 161,47 1.161,47 1.161,47 1.355,58 1.355,58 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51 1.24,51
	V 35 V 42 V 42 (PR-2B) V 54 V 54 (PR-2B) V 12 S (PR-2B) V 614 S (PR-2B) V 15 S (PR-2B) V 616 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B)	Z2 Z2 Z8 Z8 Z8 Z8 Z8 Z8 Z8	570155 570165 572850 R 570175 572851 R 574748 R 574750 R 574752 R 574754 R 574756 R 574756 R 574758 R 574760 R	154,61 360,13 322,77 370,51 348,72 124,51 124,51 124,51 124,51 124,51 124,51 124,51	-	V 28 V 35 V 42 V 42 (PR-2B) V 54 V 54 (PR-2B) V 12 S (PR-2B) V 15 S (PR-2B) V 18 S (PR-2B) V 22 S (PR-2B) V 28 S (PR-2B) V 35 S (PR-2B)	Z2 Z2 Z8 Z8 Z8 Z8 Z8 Z8 Z8	570145 570155 570165 572850 R 570175 572851 R 574748 R 574752 R 574756 R 574758 R 574760 R 574760 R	154,61 154,61 360,13 322,77 370,51 348,72 124,51 124,51 124,51 124,51 124,51 136,96
SANHA-Press Pressfittings Serie 6000	V 35 S (PR-2B) SA 12 SA 12 SA 14 SA 15 SA 16 SA 18 SA 22 SA 28 SA 35 M 12 M 15 M 18 M 22 M 28 M 35 M 42 (PR-3S) M 54 (PR-3S) XP 64,0 XL (PR-3S) XP 64,0 XL (PR-3S) M 66,7 XL (PR-3S) M 66,7 XL (PR-3S) M 12 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 22 S (PR-2B) M 28 S (PR-2B) M 29 S (PR-2B) M 18 S (PR-2B) M 20 S (PR-2B) M 20 S (PR-2B) M 21 S (PR-2B) M 22 S (PR-2B) M 23 S (PR-2B) M 25 S (PR-2B) M 26 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B)	78 72 72 72 74 75 74 75 74 75 75 75 75 75	574762 R 570930 570932 570932 570935 570937 570940 570940 570940 570950 570950 570950 570100 570110 570120 570130 570140 570150 572706 R 572708 R 579100 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 R 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 579101 S 570107 570125 570135 570145 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570155 570165 572850 R 574750 R 574750 R 574750 R 574750 R 574750 R	136,96 269,83 269,83 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,61 154,61 154,61 154,61 154,61 124,51 124,51 124,51 124,51 136,96 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61	SANHA PURAPRESS Serie 8000	SA 12 SA 14 SA 15 SA 16 SA 18 SA 22 SA 28 SA 35 M 12 M 15" M 18" M 22" M 28" M 35" M 42 (PR-3S) M 42 (PR-3S) M 54 (PR-3S) XP 64,0 XL (PR-3S) XP 64,0 XL (PR-3S) M 66,7 XL (PR-3S) M 66,7 XL (PR-3S) M 108,0 G XL (PR-3S) M 108,0 G XL (PR-2B) M 15 S (PR-2B) M 15 S (PR-2B) M 28 S (PR-2B) M 28 S (PR-2B) M 29 S (PR-2B) M 15 S (PR-2B) M 15 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B) M 29 S (PR-2B) M 15 S (PR-2B) M 15 S (PR-2B) M 27 S (PR-2B) M 28 S (PR-2B) M 29 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B) M 18 S (PR-2B)	Z2 Z2 Z6 XL ³⁾ / Z7 XL 45 kM ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kM ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kM ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kM ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kM ⁴⁾ Z8 Z8 Z8 Z8 Z8 Z8 Z8 Z8 Z8 Z8 Z8 Z8 Z8	570930 570932 570935 570937 570940 570945 570955 570100 570110 570110 570120 570130 570140 570150 672706 R 672708 R 679100 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 679101 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67910 R 67	269,83 269,83 185,75 185,75 185,75 185,75 185,75 185,75 185,75 185,75 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61 154,61

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
SANHA-Therm Serie 24000	SA 12 SA 15		570930 570935	269,83 185,75
36116 24000	SA 18		570940	185,75
	SA 22		570945	185,75
	SA 28 SA 35		570950 570955	185,75 185,75
	M 12		570100	154,61
	M 15		570110	154,61
	M 18 M 22		570120 570130	154,61 154,61
	M 28		570140	154,61
	M 35 M 42 (PR-3S)	Z2	570150 572706 R	154,61 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	XP 66,7 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579108 R	1.161,47
	M 66,7 XL (PR-3S) M 76,1 XL (PR-3S)	Z6 XL ³ / Z7 XL 45 KN ⁴ / Z6 XL ³ / Z7 XL 45 KN ⁴ /	579107 R 579101 R	1.161,47 1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S) M 12 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579111 R 574736 R	1.355,58 124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,51 124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
	V 12		570107	154,61
	V 15 V 18		570115 570125	154,61 154,61
	V 22		570135	154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54 V 54 (PR-2B)	Z2	570175 572851 R	370,51 348,72
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Z8 Z8	574756 R 574758 R	124,51 124.51
	V 28 S (PR-2B)	Z8	574760 R	124,51
ANHA-Therm	V 35 S (PR-2B) SA 12	Z8	574762 R 570930	136,96 269,83
ndustry	SA 15		570935	185,75
erie 28000	SA 18 SA 22		570940 570945	185,75 185,75
	SA 28		570950	185,75
	SA 35		570955	185,75
	M 12 M 15		570100 570110	154,61 154,61
	M 18		570120	154,61
	M 22 M 28		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 42 (PR-3S)	72	572706 R	672,57
	M 54 (PR-3S) XP 66.7 XL (PR-3S)	Z2 Z6 XL³) / Z7 XL 45 kN⁴)	572708 R 579108 R	672,57 1.161,47
	M 66,7 XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579107 R	1.161,47
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R 579110 R	1.161,47
	M 88,9 G XL (PR-3S) M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,58 1.355,58
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B) M 18 S (PR-2B)	Z8 Z8	574738 R 574740 R	124,51 124,51
	M 22 S (PR-2B)	Z8	574740 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B) V 12	Z8	574746 R 570107	136,9 <i>6</i> 154,61
	V 15		570115	154,61
	V 18 V 22		570125 570135	154,61 154.61
	V 22 V 28		570145	154,61
	V 35		570155	154,61
	V 42 V 42 (PR-2B)	Z2	570165 572850 R	360,13 322,77
	V 54		570175	370,51
	V 54 (PR-2B)	72	572851 R	348,72
	V 12 S (PR-2B) V 15 S (PR-2B)	Z8 Z8	574748 R 574752 R	124,51 124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
SANITOP	M 15		570110	154,61
PERMATUBO INOX	M 18 ¹⁾		570120	154,61
	M 22 M 28 ¹⁾		570130 570140	154,61 154,61
	M 35		570150	154,61
	M 35 (PR-3S)	Z2	572727 R	672,57
	M 42 (PZ-4G)		570160	498,19
	M 54 (PZ-4G)		570170	498,19
	M 42 (PR-3S)	Z2	572706 R	672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,58
	M 108,0 G XL (PR-3S) M 15 S (PR-2B)	Z8 Z8	579111 R 574738 R	1.355,58 124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
SANPRO	TH 16*		570460	186,32
THPRESS	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B)	Z8	574774 R	136,96
SATEC SK VITerm	TH 16*	20	570460	186,32
O 20 O 71101	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	U 40		570790	249,07
	U 50		570795	298,89
CAVEIID DEEL EV	U 63 (PZ-S) TH 16*		572365	645,58
SAVEUR REFLEX PEX Water	TH 20*		570460 570470	186,32 186,32
I LA Water	TH 25*		570475	186.32
	TH 32		570480	186,32
SAVEUR REFLEX	TH 16*		570460	186,32
PEX-AL-PEX	TH 20*		570470	186,32
Gas	TH 25*		570495	186,32
	TH 32		570480	186,32
Schütz	TH 14*		570455	186,32
duo-flex	TH 16*		570460	186,32
tri-o-flex	TH 17* TH 20*		570462 570470	186,32 186,32
	TH 25*		570470	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
Schwer Fittings	M 12		570100	154,61
AQUApress	M 15		570110	154,61
	M 18		570120	154,61
	M 22		570130	154,61
	M 28		570140	154,61
	M 35		570150	154,61
	M 42 (PZ-4G) M 54 (PZ-4G)		570160	498,19
	M 42 (PR-3S)	72	570170 572706 R	498,19 672,57
	M 54 (PR-3S)	72	572708 R	672,57
	M 12 S (PR-2B)	Z8	574736 R	124,51
	M 15 S (PR-2B)	Z8	574738 R	124,51
	M 18 S (PR-2B)	Z8	574740 R	124,51
	M 22 S (PR-2B)	Z8	574742 R	124,51
	M 28 S (PR-2B)	Z8	574744 R	124,51
	M 35 S (PR-2B)	Z8	574746 R	136,96
Seppelfricke	> Aalberts integrated piping s	ystems		
SESTA	TH 14*		570455	186,32
SESTA GAS	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32

231

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	(
SESTA	H 16*	uuuptei tongo	570320	168,1
istema	H 20*		570350	168,1
nultistrato	TH 14*		570455	186,3
	TH 16*		570460	186,3
	TH 18* TH 20*		570465 570470	186,33 186,33
	TH 26*		570470	186,3
	TH 32		570473	186,3
	TH 40		570485	246,9
	TH 50 (PZ-S)		572400	645,5
	TH 63 (PZ-S)		572405	645,5
	U 16*		570765	174,3
	U 20*		570775	174,3
SIGMA LI	TH 16*		570460	186,3
remium	TH 20*		570470	186,3
	TH 25*		570495	186,3
	TH 32 TH 16 S (PR-2B)**	Z8	570480 574782 R	186,33 124,5
	TH 20 S (PR-2B)**	Z8	574782 R	124,5
	TH 25 S (PR-2B)**	Z8	574700 R 574792 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
	U 16*	20	570765	174,3
	U 20*		570775	174,3
	U 25*		570780	174,3
	U 32		570785	204,43
LOVARM	U 16*		570765	174,3
EX-THERM	U 20*		570775	174,33
	H 26*		570370	168,10
	U 32		570785	204,43
	H 16*		570320	168,10
	H 20*		570350	168,11
	H 26*		570370	168,11
TANDADD	H 32		570380	168,11
TANDARD Idraulica	H 16* H 20*		570320 570350	168,11
ultiStandard	H 25*		570360	168,11 168,11
uttistanuaru	H 32		570380	168,11
	RFz 16*		571325	194,0
	RFz 20*		571330	194,0
	RFz 25		571335	194,0
	RFz 32		571340	194,0
	TH 16*		570460	186,33
	TH 20*		570470	186,33
	TH 25*		570495	186,33
	TH 32		570480	186,33
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 25 S (PR-2B)**	Z8	574792 R	124,5
	TH 32 S (PR-2B) U 16*	Z8	574798 R 570765	136,90 174,33
	U 18*		570770	174,3
	U 20*		570775	174,3
	U 25*		570780	174,33
	U 32		570785	204.43
	U 40		570790	249,0
	U 50		570795	298,89
	U 63 (PR-3B)	Z4	572837 R	733,81
	U 63 (PZ-S)		572365	645,58
teeltrade	M 15		570110	154,6
resssystem	M 18 ¹⁾		570120	154,6
delstahl	M 22		570130	154,6
ontur M	M 28 ¹⁾		570140	154,6
	M 35	70	570150	154,6
	M 42 (PR-3S) M 54 (PR-3S)	Z2 Z2	572706 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	572708 R 579101 R	672,51 1.161,41
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,5
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,5
	M 15 S (PR-2B)	Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
ELBI	H 16*		570320	168,1
likraft	H 20*		570350	168,1
	H 26*		570370	168,1
	TH 16*		570460	186,3
	TH 20*		570470	186,3
	TH 26*		570475	186,3
	TH 32		570480	186,3
	TH 40		570485	246,9
	TH 50 (PZ-S)		572400	645,51
	TH 63 (PZ-S)	70	572405	645,5
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8 79	574788 R	124,5
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R	124,5
	U 16*	70	574798 R 570765	136,9 174,3
	U 20*		570775	174,3
	U 26* ¹²⁾		570750	204,4
ELBI	TH 16*		570750	186,3
	TH 20*		570460 570470	186,3
			570470	186,3
Stelgas	IH 76*			
orgao	TH 26* TH 16 S (PR-2R)**	78		
otguo	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,5 124,5

STH Weston N 50 M 22 M 28 M 29 M 29 M 25 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 27 M 28 M 28 M 29 M 28 M 29 M 28 M 27 M 27 M 27 M 27 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28 M 28	System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
M 28		M 15			154,61 154,61
M. 4.2 (PR. 28) 22 57.7716 R M. 5.3 (PR. 28) 22 57.7716 R M. 5.3 (PR. 28) 28 57.773 R M. 2.5 (PR. 28) 28 57.773 R M. 2.5 (PR. 28) 28 57.774 R TOM BRASS PR. 28 28 57.774 R TOM BRASS PR. 28 28 57.774 R TOM BRASS PR. 28 28 57.774 R TOM BRASS PR. 28 28 57.774 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 29 57.775 R TOM BRASS PR. 28 29 57.775 R TOM BRASS PR. 28 29 57.775 R TOM BRASS PR. 28 29 57.775 R TOM BRASS PR. 28 29 57.775 R TOM BRASS PR. 28 29 57.775 R TOM BRASS PR. 28 29 57.775 R TOM BRASS PR. 28 29 29 57.775 R TOM BRASS PR. 28 29 29 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS PR. 28 28 57.775 R TOM BRASS	CUFFER FRESS				154,61
M S (PR-2S)			70		154,61
M 22 S (PR-28)					672,57 672,57
THERMACUME ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***BERNALL** ***B					124,51
TOM BRASS Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1600 H 18° Serie 1700 gas H 16° Serie 1700 gas H 16° Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1700 gas Serie 1					124,51 124,51
TOM BRASS Serie 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 H 18" Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 1600 Fig. 160			Z8	574746 R	136,96
Serie 1600 H 18"			Т		
H 25' \$70320 H 22' \$70320 H 32' \$70320 H 18' \$70440 H 18' \$70445 H 18' \$70445 H 18' \$70445 H 12' \$70470 H 12' \$70470 H 12' \$70470 H 12' \$70470 H 12' \$70475 H 12' \$70475 H 12' \$70475 H 14 2' \$70475 H 14 2' \$70475 H 15 (PF-28)' 28 \$77482 H 18 S (PF-28)' 28 \$77498 H 25 S (PF-28)' 28 \$77498 H 25 S (PF-28)' 28 \$77498 H 25 S (PF-28)' 28 \$77498 H 25 S (PF-28)' 28 \$77498 H 26 S (PF-28)' 28 \$77498 H 27		H 18*		570340	168,10 168,10
H 32					168,10 168,10
TH 16" \$70440 TH 18" \$70440 TH 18" \$70445 TH 20" \$70470 TH 20" \$70470 TH 20" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$70475 TH 22" \$					168,10
TH 20" TH 22" TH 25" TH 25" TH 25" TH 26" TH 125" TH 140" TH 150 (PT-S) TH 150 (PT-S) TH 150 (PT-S) TH 150 (PT-S) TH 151 S (PR-28)" TH 161 S (PR-28)" TH 162 S (PR-28)" TH 262 S (PR-28)" TH 263 S (PR-28)" TH 263 S (PR-28)" TH 264 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265 S (PR-28)" TH 265					168,10 186,32
THE 25" TH 25" TH 26" TH 26" TH 32" TH 40 ST0455 TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (PZ-S) TH 30 (P					186,32
TH. 132 TH. 40 TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) TH. 50 (PC-S) T					186,32 186,32
TH 40					186,32
TH 63 (PP-2B)** 78 574782 R TH 10 S (PP-2B)** 78 574782 R TH 10 S (PP-2B)** 78 574782 R TH 10 S (PP-2B)** 78 574782 R TH 20 S (PP-2B)** 78 574792 R TH 25 S (PP-2B)** 78 574794 R TH 25 S (PP-2B)** 78 574794 R TH 25 S (PP-2B)** 78 570775 TH 25 S (PP-2B)** 78 570775 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770780 TH 25 S (PP-2B)** 78 770470 TH 25 S (PP-2B)** 78 770470 TH 25 S (PP-2B)** 78 770470 TH 25 S (PP-2B)** 78 770470 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 770770 TH 25 S (PP-2B)** 78 7					186,32 246,99
TH IA S (PR-2B)**				572400	645,58
THE 2D S (PR-2B)**			Z8		645,58 124,51
TH 25 S (PR-2B)**			Z8	574786 R	124,51
TH 26 S (PR-2B)**					124,51 124,51
U 18* S70770		TH 26 S (PR-2B)**		574794 R	124,51
U 20" 570775 U 25" 570780 U 26" 110 125" 570780 U 26" 110 125" 570780 170750 U 26" 110 125" 570780 170750 U 32 570785 185" 18" 18" 570320 18" 18" 570320 18" 18" 570330 18" 18" 570330 18" 18" 570330 18" 18" 570330 18" 18" 570460 18" 18" 570460 18" 18" 570460 18" 18" 18" 570465 18" 18" 18" 570465 18" 18" 570467 18" 18" 570467 18" 18" 570467 18" 18" 570467 18" 18" 570467 18" 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 570470 18" 5704					174,33 174,33
U 26		U 20*		570775	174,33
U 32					174,33 204,43
Serie 2600 H 18° 570340 H 20° 570350 H 25° 570360 H 25° 570370 H 26° 570370 H 32 570370 TH 16° 570460 TH 18° 570460 TH 18° 570465 TH 20° 570470 TH 20° 570475 TH 16 S (PR-28)** Z8 574782 R TH 20 S (PR-28)** Z8 574782 R TH 16 S (PR-28)** Z8 570775 TH 16 S (PR-28)** Z8 570775 TH 16 S (PR-28)** Z8 570775 TH 25° 570775 TH 25° 570775 TH 25° 570775 TH 25° 570775 TH 26° 570775 TH 26° 570775 TH 26° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570775 TH 28° 570776 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 570770 TH 28° 5		U 32		570785	204,43
H 20° \$70350					168,10 168,10
H 26' 570370 H 32 570380 TH 16' 570460 TH 18' 570465 TH 20' 570475 TH 20' 570475 TH 20' 570487 TH 132 570487 TH 18' 570487 TH 132 570487 TH 18' 570475 TH 132 570487 TH 18' 570487 TH 18' 570487 TH 18' 570487 TH 18' 570487 TH 18' 570487 TH 18' 570487 TH 18' 570487 TH 18' 570765 TH 26' 570776 TH 26' 570776 TH 20' 570770 TH 20' 570770 TH 20' 570775 TH 20' 570770 TH 20' 570770 TH 20' 570770 TH 20' 570775 TH 20' 570775 TH 20' 570775 TH 20' 570775 TH 20' 570775 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570485 TH 30' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 570470 TH 20' 5704	00110 2000	H 20*		570350	168,10
H 32 TH 16* TH 16* TH 18* TH 20* TH 20* TH 20* TH 25* TH 20* TH 25* TH 26* TH 18* TH 18* TT 27* TH 18 S (PR-2B)** TH 18 S (PR-2B)** TH 20 S (PR-2B)** U 16* U 10* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20* U 20*					168,10 168,10
TH 18* TH 20* TH 25* TH 26* TH 26* TH 26* TH 26* TH 12					168,10
TH 20* TH 25* TH 26* TH 26* TH 26* TH 18 (PR-2B)** TH 18 S (PR-2B)** TH 18 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 28 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)					186,32 186,32
TH 26' THL 32 TH 16 S (PR-2B)** TH 16 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 27 S (PR-2B)** TH 28 S (PR-2B)** TH 29 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 27 S (PR-2B)** TH 27 S (PR-2B)** TH 27 S (PR-2B)** TH 28 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 29 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)*		TH 20*		570470	186,32
THL 32 TH 16 S (PR-2B)** TH 18 S (PR-2B)** TH 18 S (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 27 S (PR-2B)** TH 28 S (PR-2B)** TH 29 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20					186,32 186,32
TH 18 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 27 S (PR-2B)** TH 28 S (PR-2B)** TH 29 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-		THL 32			186,32
TH 20 S (PR-2B)** TH 25 S (PR-2B)** TH 25 S (PR-2B)** TH 25 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-					124,51 124,51
TH 26 S (PR-2B)** U 16* U 18* U 18* U 10* S70075 U 20* S70775 U 25* S70780 U 26**** U 26**** U 32* S70780 U 32* S70785 TDM BRASS TH 16* Serie 1700 gas TH 20* TH 26* TH 26* Serie 1700 gas TH 20* TH 26* TH 20* TH 26* TH 20* TH 26* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH		TH 20 S (PR-2B)**	Z8	574788 R	124,51
U 16* U 18* U 18* S70775 U 20* S70775 U 25* U 25* U 26* U 26* U 26* U 26* U 32 S70780 U 32 S70785 TDM BRASS TH 16* Serie 1700 gas TH 20* TH 26* TH 20* TH 26* TH 20* TH 26* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH					124,51 124.51
U 20* 570775 U 25* 570780 U 26****** U 26************************************		U 16*	20	570765	174,33
U 25* U 26*107 U 26*107 U 26*107 U 27 U 27 U 28 TDM BRASS TH 16* Serie 1700 gas TH 20* TH 26* TH 26* TH 26* TH 26* TH 26* TH 26 SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)** TH 20 S SPR-2B)*					174,33 174,33
U 32 570785 TDM BRASS TH 16* 570460 Serie 1700 gas TH 20* 570470 TH 26* 570475 TH 12 2 570487 TH 12 2 570487 TH 12 0 5 (PR-2B)** 28 574792 R TH 20 5 (PR-2B)** 28 574794 R TERMOLUTZ H 14* 570320 TH 20* 5 (PR-2B)** 28 574798 R TE-SA TH 20* 5 (PR-2B)** 28 574798 R TE-SA TH 16* 570470 TH 20 5 (PR-2B)** 28 574790 TE-SA Press TH 16* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570470 TH 20* 570480 TH 50 (PZ-S) TH 40 570485 TH 40 570485 TH 40 570485 TH 16 S (PR-2B)** 28 57478 R TH 16 S (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R TH 20 5 (PR-2B)** 28 574798 R THERMACOME H 10* 570320 ACOPEX ALU		U 25*		570780	174,33
TDM BRASS TH 16* Serie 1700 gas TH 20* Serie 1700 gas TH 20* TH 26* TH 26* TH 10* TH 26* TH 10* TH 10* TH 10* TH 10* TH 10* TH 10* TH 10* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH					204,43 204,43
TH 26*					186,32
THL 32 TH 16 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 26 S (PR-2B)** TH 20 S (PR-2B)** THERMOLUTZ H 14* TH 20 S (PR-2B)** TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20*	Serie 1700 gas				186,32 186,32
TH 20 S (PR-2B)**				570487	186,32
TH 26 S (PR-2B)** TermoConcept TC-PRESS THERMOLUTZ H 14*					124,51 124,51
TC-PRESS THERMOLUTZ H 14* H 16* TH 20* TH 20 S (PR-2B)** TE-SA TE-SA TH 14* TH 20* TH 20* TH 20* TH 20* TH 20* TH 32 TH 20* TH 32 TH 40 TH 32 TH 40 TH 40 TH 50 (PZ-S) TH 50 (PZ-S) TH 63 (PZ-S) TH 63 (PZ-S) TH 63 (PZ-S) TH 14 S (PR-2B)** TH 15 S (PR-2B)** TH 18 S (PR-2B)** TH 18 S (PR-2B)** TH 28 S 74478 R TH 29 S 74478 R TH 20 S 74478 R TH 20 S 74478 R TH 20 S 74478 R TH 20 S 74478 R TH 20 S 74478 R TH 20 S 74478 R TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 20 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2B)** TH 30 S (PR-2		TH 26 S (PR-2B)**		574794 R	124,51
H 16* TH 20* TH 20* TH 20 S (PR-2B)** Z8 TE-SA TE-SA TH 14* TE-SA press TH 16* Serie 800 TH 18* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 40 TH 50 (PZ-S) TH 40 TH 50 (PZ-S) TH 40 TH 50 (PZ-S) TH 63 (PZ-S) TH 14 S (PR-2B)** TH 18 S (PR-2B)** TH 18 S (PR-2B)** TH 18 S (PR-2B)** TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20* TH 20*	TC-PRESS				305,17
TH 20* 570470 TH 20 S (PR-28)** 28 574788 R TE-SA TH 14* 570455 TE-SA press TH 16* 570460 serie 900 TH 18* 570460 TH 20* 570470 TH 26* 570475 TH 32 570480 TH 40 570485 TH 50 (PZ-S) 572405 TH 63 (PZ-S) 572405 TH 18 S (PR-28)** Z8 574778 R TH 16 S (PR-28)** Z8 574782 R TH 18 S (PR-28)** Z8 574788 R TH 20 S (PR-28)** Z8 574798 R TH 26 S (PR-28)** Z8 574798 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370	THERMULUIZ				168,10 168,10
TE-SA TH 14* 570455 TE-SA press TH 16* 570460 serie 800 TH 18* 570465 TH 20* 570470 TH 26* 570475 TH 32 570480 TH 50 (PZ-S) 570480 TH 50 (PZ-S) 572400 TH 63 (PZ-S)* 28 57478 R TH 18 S (PR-2B)** 28 57478 R TH 20 S (PR-2B)** 28 57478 R TH 20 S (PR-2B)** 28 57479 R TH 20 S (PR-2B)** 28 57479 R TH 20 S (PR-2B)** 28 57479 R TH 20 S (PR-2B)** 28 57479 R TH 20 S (PR-2B)** 28 57479 R TH 20 S (PR-2B)** 28 57479 R TH 20 S (PR-2B)** 28 57479 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370		TH 20*		570470	186,32
TE-SA press serie 800	TF-SA		Z8		124,51 186,32
TH 20* 570470 TH 26* 570475 TH 32 570480 TH 32 570480 TH 40 570485 TH 50 (PZ-S) 572400 TH 63 (PZ-S) 572405 TH 14 S (PR-2B)** Z8 57478 R TH 16 S (PR-2B)** Z8 57478 R TH 18 S (PR-2B)** Z8 57478 R TH 20 S (PR-2B)** Z8 57478 R TH 20 S (PR-2B)** Z8 57479 R TH 20 S (PR-2B)** Z8 57479 R TH 20 S (PR-2B)** Z8 57479 R TH 20 S (PR-2B)** Z8 57479 R TH 20 S (PR-2B)** Z8 57479 R TH 20 S (PR-2B)** Z8 57479 R TH 20 S (PR-2B)** Z8 57479 R	TE-SA press	TH 16*		570460	186,32
TH 26* 570475 TH 32 570480 TH 32 570480 TH 40 570485 TH 50 (PZ-S) 572400 TH 63 (PZ-S) 572405 TH 14 S (PR-2B)** Z8 574778 R TH 18 S (PR-2B)** Z8 574786 R TH 18 S (PR-2B)** Z8 574786 R TH 20 S (PR-2B)** Z8 574786 R TH 20 S (PR-2B)** Z8 574796 R TH 20 S (PR-2B)** Z8 574798 R TH 20 S (PR-2B)** Z8 574798 R TH 20 S (PR-2B)** Z8 574798 R TH 20 S (PR-2B)** Z8 574798 R TH 20 S (PR-2B)** Z8 574798 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370	serie 800				186,32 186,32
TH 40 570485 TH 50 (PZ-S) 572400 TH 63 (PZ-S) 572405 TH 14 S (PR-2B)** Z8 57478 R TH 16 S (PR-2B)** Z8 57478 R TH 16 S (PR-2B)** Z8 57478 R TH 20 S (PR-2B)** Z8 57478 R TH 20 S (PR-2B)** Z8 57478 R TH 20 S (PR-2B)** Z8 57479 R TH 32 S (PR-2B) Z8 57479 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370		TH 26*		570475	186,32
TH 50 (PZ-S) 572400 TH 63 (PZ-S) 572405 TH 14 5 (PR-2B)** 28 57478 R TH 16 5 (PR-2B)** 28 57478 R TH 18 5 (PR-2B)** 28 574786 R TH 19 5 (PR-2B)** 28 574786 R TH 20 5 (PR-2B)** 28 574788 R TH 20 5 (PR-2B)** 28 574794 R TH 32 5 (PR-2B) 28 574794 R TH 32 5 (PR-2B) 28 574798 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370					186,32 246,99
TH 14 S (PR-2B)** Z8 574778 R TH 16 S (PR-2B)** Z8 574782 R TH 18 S (PR-2B)** Z8 574786 R TH 20 S (PR-2B)** Z8 574786 R TH 20 S (PR-2B)** Z8 574798 R TH 26 S (PR-2B)** Z8 574794 R TH 32 S (PR-2B) Z8 574798 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370		TH 50 (PZ-S)		572400	645,58
TH 16 S (PR-2B)** Z8 574782 R TH 18 S (PR-2B)** Z8 574786 R TH 20 S (PR-2B)** Z8 574786 R TH 20 S (PR-2B)** Z8 574794 R TH 32 S (PR-2B) Z8 57479 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370			78		645,58 124,51
TH 20 S (PR-2B)** Z8 574788 R TH 26 S (PR-2B)** Z8 574794 R TH 32 S (PR-2B) Z8 574798 R THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370		TH 16 S (PR-2B)**	Z8		124,51
TH 26 S (PR-2B)** Z8 574794 R TH 32 S (PR-2B) Z8 574798 R THERMACOME ACOPEX ALU H 16* 570320 H 20* 570350 H 26* 570370					124,51 124,51
THERMACOME H 16* 570320 ACOPEX ALU H 20* 570350 H 26* 570370		TH 26 S (PR-2B)**	Z8	574794 R	124,51
ACOPEX ALU H 20* 570350 H 26* 570370	THERMYLUME		Z8		136,96 168,10
		H 20*		570350	168,10
					168,10 168,10
TH 16* 570460		TH 16*		570460	186,32
TH 20* 570470				570470	186,32
					186,32 186,32
					174,33
					174,33 204,43

System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	
ГІЕММЕ	TH 14*		570455	186,
1650 AL-COBRAPEX	TH 16*		570460	186,
	TH 18* TH 20*		570465 570470	186, 186,
	TH 25*		570495	186,
	TH 26*		570475	186,
	THL 32		570487	186,
	TH 40		570485	246,
	TH 50 (PZ-S)		572400	645,
	TH 63 (PZ-S) THz 75 (PR-3B)	Z 4	572405 572829 R	645, 609,
	TH 14 S (PR-2B)**	Z8	574778 R	124.
	TH 16 S (PR-2B)**	Z8	574782 R	124,
	TH 18 S (PR-2B)**	Z8	574786 R	124,
	TH 20 S (PR-2B)**	Z8	574788 R	124,
	TH 25 S (PR-2B)**	Z8	574792 R	124,
751115	TH 26 S (PR-2B)**	Z8	574794 R	124,
TEMME 700 Cobrapex	RFz 12* RFz 16*		571320 571325	194, 194,
700 CODICAT LX	RFz 20*		571330	194,
	RFz 25		571335	194,
	RFz 32		571340	194
	TH 40		570485	246
	TH 50 (PZ-S)		572400	645,
	TH 63 (PZ-S)		572405	645,
TEMME	TH 16*		570460	186
650 AL-COBRAPEX	TH 20* TH 26*		570470 570475	186, 186,
INJ	THL 32		570487	186,
	TH 16 S (PR-2B)**	Z8	574782 R	124
	TH 20 S (PR-2B)**	Z8	574788 R	124
	TH 26 S (PR-2B)**	Z8	574794 R	124
IGRE	TH 16*		570460	186
LPEX GÁS	TH 20*		570470	186
	TH 26* TH 32		570475	186
KM	TH 14*		570480 570455	186 186
ystemtechnik	TH 16*		570460	186
,	TH 20*		570470	186
	TH 26*		570475	186
	TH 32		570480	186
	TH 40		570485	246
	TH 50 (PZ-S)		572400	645
RA Multi TRA+	TH 63 (PZ-S) H 16*		572405 570320	645 168
NA MULLI INA+	H 20*		570350	168
	H 25*		570360	168
	H 26*		570370	168
	H 32		570380	168
	H 40 (PZ-4G)		570390	565
	TH 16*		570460	186
	TH 20*		570470	186
	TH 25* TH 26*		570495 570475	186 186
	TH 32		570480	186
	TH 40		570485	246
	TH 50 (PZ-S)		572400	645
	TH 63 (PZ-S)		572405	645
	THz 75 (PR-3B)	Z4	572829 R	609
	TH 16 S (PR-2B)**	Z8	574782 R	124
	TH 20 S (PR-2B)** TH 25 S (PR-2B)**	Z8	574788 R	124
	TH 26 S (PR-2B)**	Z8 Z8	574792 R 574794 R	124 124
	TH 32 S (PR-2B)	Z8	574798 R	136
	U 16*		570765	174
	U 20*		570775	174
	U 25*		570780	174
	U 26* 12)		570750	204
	U 32		570785	204
	U 40		570790	249
	U 50	7/	570795	298
	U 63 (PR-3B)	Z4	572837 R	733
	U 63 (PZ-S)		572365	645

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
TRA MULTITRAPRESS	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20* U 25*		570775 570780	174,33 174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PR-3B)	Z 4	572837 R	733,81
	U 63 (PZ-S)		572365	645,58
TRA TRAPRESS	H 12*		570300	168,10
	H 16*		570320	168,10
	H 20* H 25*		570350 570360	168,10 168,10
	H 32		570380	168,10
	RFz 12*		571320	194,05
	RFz 16*		571325	194,05
	RFz 20*		571330	194,05
	RFz 25		571335	194,05
	RFz 32		571340	194,05
Tradelink TradePex Crimp	K16/P18* K/20*		572600	194,05
Water	K/25*		572605 572610	194,05 194,05
Water	K32		572615	194,05
	K1/40		572620	194,05
	K1/50		572625	318,61
Tradelink	K16/P18*		572600	194,05
TradePex Crimp	K/20*		572605	194,05
Gas	K/25*		572610	194,05
	K32 K1/40		572615 572620	194,05 194,05
	K1/50		572625	318,61
TUBIPLAST ITALY	TH 16*		570460	186,32
MULTILAYER PIPE	TH 18*		570465	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,99
	TH 63 (PZ-S)		572405	645,58 645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	H 16*		570320	168,10
	H 18* H 20*		570340 570350	168,10 168,10
	H 26*		570370	168,10
	H 32		570370	168,10
	U 16*		570765	174,33
	U 18*		570770	174,33
	U 20*		570775	174,33
	U 26* 12)		570750	204,43
TUDIDI ACT ITALY	U 32		570785	204,43
TUBIPLAST ITALY MULTILAYER PIPE	TH 16* TH 18*		570460 570465	186,32 186.32
GAS SYSTEM	TH 20*		570470	186,32
UND DIDILIN	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 18 S (PR-2B)**	Z8	574786 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8 Z8	574794 R	124,51
TWEETOP	TH 32 S (PR-2B) U 16*	£0	574798 R 570765	136,96 174,33
INCLIUT	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	U 50		570795	298,89
	U 63 (PR-3B)	24	572837 R	733,81
	U 63 (PZ-S) U 75 (PR-3B)	74	572365 572828 R	645,58 645,58
	U / 3 UPK=3DI	14	3//4/8 K	በ43 38

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
		U		
UNICAL AG	U 16*		570765	174,33
MAX-MULTIPEX	U 20* H 26*		570775 570370	174,33 168,10
	U 26* 12)		570750	204,43
UNIDELTA	U 32 TH 16*		570785 570460	204,43 186,32
DELTAPRESS	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,51 124,51
	TH 32 S (PR-2B) H 16*	Z8	574798 R 570320	136,96 168,10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	H 40 (PZ-4G)		570390	565,67
	U 16* U 20*		570765 570775	174,33
	U 32		570785	174,33 204,43
	U 40		570790	249,07
	U 50 U 63 (PZ-S)		570795 572365	298,89 645,58
UNIDELTA DELTAPRESS GAS	TH 16* TH 20*		570460	186,32
PLLINI RE33 DA3	TH 26*		570470 570475	186,32 186,32
	TH 32 TH 16 S (PR-2B)**	Z8	570480	186,32 124,51
	TH 20 S (PR-2B)**	Z8	574782 R 574788 R	124,51
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,51 136,96
	H 16*	20	570320	168,10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	U 16*		570765 570775	174,33
	U 20* U 32		570785	174,33 204,43
Uponor	UP 14* UP 16*		572630 572632	174,33 174,33
	UP 20*		572636	174,33
	UP 25 UP 32		572638 572640	174,33 204,43
	U 40		570790	249,07
	U 50 U 63 (PR-3B)	74	570795 572837 R	298,89 733,81
	U 63 (PZ-S)		572365	645,58
	U 75 (PR-3B)	Z4	572828 R	645,58
Valsir Bravopress	B 16*	V	570850	203,40
Tuton brutopicoo	B 20*		570860	203,40
	B 26 B 32		570870 570880	224,16 224,16
	F 16*		570717	177,45
	F 20* F 26*		570727 570730	177,45 191,98
	F 16 S (PR-2B)**	Z8	574728 R	124,51
	F 20 S (PR-2B)** F 26 S (PR-2B)**	Z8 Z8	574730 R 574732 R	124,51 124,51
	H 16*	20	570320	168,10
	H 20* H 26*		570350 570370	168,10 168,10
	H 32		570380	168,10
	H 32 V TH 16*		570685 570460	214,81 186,32
	TH 20*		570470	186,32
	TH 26* TH 32		570475 570480	186,32 186,32
	U 16*		570765	174,33
	U 20* U 26* ¹²⁾		570775 570750	174,33 204,43
	U 32		570785	204,43
Valsir PEXAL	H 14* H 16*		570310 570320	168,10 168,10
	H 20*		570350	168,10
	H 26* H 32		570370 570380	168,10 168,10
	H 32 V		570685	214,81
	TH 16* TH 20*		570460 570470	186,32 186,32
	TH 26*		570475	186,32
	TH 32 TH 40		570480 570485	186,32
	TH 40 TH 50 (PZ-S)		570485 572400	246,99 645,58
	TH 63 (PZ-S)		572405	645,58
	U 16* U 20*		570765 570775	174,33 174,33
	U 26* 12)		570750	204,43
	U 32 U 40		570785 570790	204,43 249,07
	U 50 U 63 (PR-3B)	71.	570795	298,89
	11 D 3 LPK-1KI	Z4	572837 R	733,81
	U 63 (PZ-S)	Z 4	572365	645,58

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Van Marcke NV SYSTEMPEX	TH 16* TH 20*		570460 570470	186,32 186,32
SISILMILA	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S) TH 63 (PZ-S)		572400 572405	645,58 645,58
	THz 75 (PR-3B)	Z4	572829 R	609,2
	TH 16 S (PR-2B)**	Z8 Z8	574782 R	124,5
	TH 20 S (PR-2B)** TH 26 S (PR-2B)**	Z8	574788 R 574794 R	124,5° 124,5°
	TH 32 S (PR-2B)	Z8	574798 R	136,96
Van Marcke NV	M 12		570100	154,6
Tubipress	M 15 M 18		570110 570120	154,6° 154.6°
	M 22		570130	154,6
	M 28		570140	154,6
	M 35 M 42 (PZ-4G)		570150 570160	154,6° 498,1°
	M 54 (PZ-4G)		570170	498,1
	M 42 (PR-3S)	72	572706 R	672,5
	M 54 (PR-3S) M 76,1 XL (PR-3S)	Z2 Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	572708 R 579101 R	672,5° 1.161,4°
	M 88,9 G XL (PR-3S)	Z6 XL3) / Z7 XL 45 kN4)	579110 R	1.355,58
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,5
	M 12 S (PR-2B) M 15 S (PR-2B)	Z8 Z8	574736 R 574738 R	124,5 124.5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,5 136,9
Variotherm	TH 11,6*		570482	186,32
System TH	TH 16*		570460	186,32
	TH 20* TH 11,6 S (PR-2B)**	Z8	570470 574774 R	186,32 124.5
	TH 16 S (PR-2B)**	Z8	574774 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
VESBO Carbon	M 15 M 18		570110 570120	154,6° 154,6°
CARDON	M 22		570130	154,6
	M 28		570140	154,6
	M 35 M 42 (PR-3S)	72	570150 572706 R	154,6 672,5
	M 54 (PR-3S)	72	572708 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,47
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R 579111 R	1.355,58
	M 108,0 G XL (PR-3S) M 15 S (PR-2B)	Z8 XL-7 Z7 XL 45 KN **	574738 R	1.355,58 124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B) M 28 S (PR-2B)	Z8 Z8	574742 R 574744 R	124,5
	M 35 S (PR-2B)	Z8	574744 R 574746 R	124,5° 136,96
VESB0	M 15		570110	154,6
INOX	M 18 M 22		570120 570130	154,6° 154,6°
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PR-3S) M 54 (PR-3S)	72 72	572706 R 572708 R	672,5 672,5
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,4
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,5
	M 108,0 G XL (PR-3S) M 15 S (PR-2B)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾ Z8	579111 R 574738 R	1.355,5 124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B) M 35 S (PR-2B)	Z8 Z8	574744 R 574746 R	124,5 136,9
VESBO	TH 16*	20	570460	186,32
MULTIPRESS TH-U	TH 20*		570470	186,3
	TH 26* TH 32		570475 570480	186,3 186,3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8 Z8	574794 R 574798 R	124,5
	U 16*	20	570765	136,9 174,3
	U 20*		570775	174,3
	U 26* ¹²⁾		570750	204,4
VESB0	U 32 U 16*		570785 570765	204,4 174,3
VPREMIUM	U 20*		570775	174,3
	U 25*		570780	174,3
	U 32 U 40		570785 570790	204,43 249,0
	U 50		570795	298,8
Viana Frants	U 63 (PZ-S)		572365	645,58
Viega Fonterra	VX 12* VP 14/15*		571630 570905	214,8 185,7
	VP 16/17*		570910	185,7
	VP 20*		570915	185,7
Viega MegaPress	VP 25 ²⁾ VMP ³ / ₈ " (0D 17,2 mm)		570920 571740	185,75 214,81
viega megarress (ASTM) ¹⁰⁾	VMP 1/2" G (OD 21,3 mm)		571740 571766 R	214,8
	VMPz 3/4" (OD 26,9 mm)		571764	214,8
	VMPz 1" (OD 33,7 mm) VMPz 11/4" (PZ-S) (OD 42,4 mm)		571767 572413	214,8° 704,7
			31//413	/ (14./)
	VMPz 1½" (PR-3B) (0D 48,3 mm)	Z5	572844 R	479,50

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	•
Viega MegaPress 304	VMP ½" G (0D 21,3 mm)		571766 R	214,8
FKM	VMPz 3/4" (OD 26,9 mm)		571764	214,8
(ASTM) ¹⁰⁾	VMPz 1" (0D 33,7 mm)		571767	214,8
	VMPz 11/4" (PZ-S) (0D 42,4 mm)	75	572413	704,7
	VMPz 1½" (PR-3B) (0D 48,3 mm) VMPz 2" (PR-3B) (0D 60.3 mm)	Z5 Z5	572844 R 572845 R	479,51 479,51
Viega MegaPress 316	VMP ½" G (OD 21.3 mm)	LJ	571766 R	214,8
(ASTM)10)	VMPz 3/4" (OD 26,9 mm)		571766 K	214,8
(4011-1)	VMPz 1" (0D 33.7 mm)		571767	214,8
	VMPz 1¼" (PZ-S) (0D 42,4 mm)		572413	704,7
	VMPz 11/2" (PR-3B) (0D 48,3 mm)	Z5	572844 R	479,51
	VMPz 2" (PR-3B) (0D 60,3 mm)	Z5	572845 R	479,51
Viega MegaPress 316	VMP 1/2" G (OD 21,3 mm)		571766 R	214,8
FKM	VMPz 3/4" (0D 26,9 mm)		571764	214,8
(ASTM) ¹⁰⁾	VMPz 1" (0D 33,7 mm)		571767	214,8
	VMPz 11/4" (PZ-S) (0D 42,4 mm)		572413	704,7
	VMPz 1½" (PR-3B) (0D 48,3 mm)	Z5	572844 R	479,51
	VMPz 2" (PR-3B) (0D 60,3 mm)	Z5	572845 R	479,51
Viega MegaPress CuNi			571766 R	214,8
(ASTM) ¹⁰⁾	VMPz 3/4" (0D 26,9 mm) VMPz 1" (0D 33,7 mm)		571764 571767	214,8
	VMPz 11/4" (PZ-S) (0D 42,4 mm)		572413	214,8° 704,7
	VMPz 1½" (PR-3B) (0D 48,3 mm)	Z5	572844 R	479,5
	VMPz 2" (PR-3B) (0D 60,3 mm)	Z5	572845 R	477,51
Viega MegaPress FKM		20	571766 R	214,8
(ASTM) ¹⁰⁾	VMPz 3/4" (OD 26.9 mm)		571764	214,8
	VMPz 1" (0D 33.7 mm)		571767	214,8
	VMPz 11/4" (PZ-S) (0D 42,4 mm)		572413	704,7
	VMPz 11/2" (PR-3B) (OD 48,3 mm)	Z5	572844 R	479,51
	VMPz 2" (PR-3B) (0D 60,3 mm)	Z5	572845 R	479,51
Viega Megapress	VMP 3/8" (0D 17,2 mm)		571740	214,8
(EN)9)	VMP ½" G (0D 21,3 mm)		571766 R	214,8
	VMPz 3/4" (OD 26,9 mm)		571764	214,8
	VMPz 1" (0D 33,7 mm)		571767	214,8
	VMPz 11/4" (PZ-S) (0D 42,4 mm)	75	572413	704,7
	VMPz 1½" (PR-3B) (0D 48,3 mm) VMPz 2" (PR-3B) (0D 60,3 mm)	Z5 Z5	572844 R 572845 R	479,51
Viega Megapress S	VMP 3/8" (OD 17,2 mm)	LJ	571740	479,51 214,8
viega megapress 5 (EN) ⁹⁾	VMP 1/2" G (OD 21,3 mm)		571740 571766 R	214,8
(LIV)	VMPz 3/4" (OD 26,9 mm)		571766 K	214,8
	VMPz 1" (0D 33.7 mm)		571767	214,8
	VMPz 1¼" (PZ-S) (0D 42,4 mm)		572413	704,7
	VMPz 1½" (PR-3B) (0D 48,3 mm)	Z5	572844 R	479.51
	VMPz 2" (PR-3B) (0D 60,3 mm)	Z5	572845 R	479,51
Viega	VMPz 21/2" XL (PR-3B) EN (0D 76,1 mm)	Z7 XL 45 kN ⁴⁾	579112 R	609,2
Megapress S XL	VMPz 3" XL (PR-3B) (0D 88,9 mm)	Z7 XL 45 kN ⁴⁾	579113 R	609,2
(EN ⁹⁾)	VMPz 4" XL (PR-3B) (0D 114,3 mm)	Z7 XL 45 kN ⁴⁾	579114 R	645,5
Viega Pexfit	VX 16*		571635	214,8
	VX 20*		571640	214,8
	VX 25*		571645	214,8
Viega Pexfit G	VX 16*		571635	214,8
	VX 20*		571640	214,8
C D t. l	VX 25*		571645	214,8
Viega Prestabo	V 12 V 15		570107 570115	154,6
	V 18		570125	154,6° 154,6°
	V 22		570135	154,6
	V 28		570145	154.6
	V 35		570155	154,6
	V 42		570165	360,1
	V 42 (PR-2B)	Z2	572850 R	322.7
	V 54		570175	370,5
	V 54 (PR-2B)	72	572851 R	348,7
	VFz 64,0 (PR-3B)6)	Z5	572815 R	609,2
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816 R	609,2
	VFz 88,9 (PR-3B) ⁶⁾	Z5	572817 R	645,5
	VFz 108,0 (PR-3B)6)	Z5	572818 R	645,5
	V 12 S (PR-2B)	Z8	574748 R	124,5
	V 15 S (PR-2B)	Z8	574752 R	124,5
	V 18 S (PR-2B)	Z8	574756 R	124,5
	V 22 S (PR-2B)	Z8	574758 R	124,5
	V 28 S (PR-2B)	Z8	574760 R	124,5
	V 35 S (PR-2B)	Z8	574762 R	136,9

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Viega Profipress	V 12		570107	154,61
	VG 14		570132	154,61
	V 15 VG 16		570115 570137	154,61 154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42	70	570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815 R	609,25
	VFz 66,7 (PR-3B)	Z5	572846 R	609,25
	VFz 76,1 (PR-3B) ⁶⁾	Z5	572816 R	609,25
	VFz 88,9 (PR-3B)6)	Z5	572817 R	645,58
	VFz 108,0 (PR-3B) ⁶⁾	Z5 Z8	572818 R 574748 R	645,58
	V 12 S (PR-2B) VG 14 S (PR-2B)	Z8	574750 R	124,51 124,51
	V 15 S (PR-2B)	Z8	574750 R	124,51
	VG 16 S (PR-2B)	Z8	574754 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
V: D C C	V 35 S (PR-2B)	Z8	574762 R	136,96
Viega Profipress G	V 12 VG 14		570107 570132	154,61 154,61
	V 15		570115	154,61
	VG 16		570137	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42 V 42 (PR-2B)	72	570165 572850 R	360,13 322,77
	V 54	LL	570175	370,51
	V 54 (PR-2B)	72	572851 R	348,72
	VFz 64,0 (PR-3B) ⁶⁾	Z5	572815 R	609,25
	V 12 S (PR-2B)	Z8	574748 R	124,51
	VG 14 S (PR-2B)	Z8	574750 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	VG 16 S (PR-2B) V 18 S (PR-2B)	Z8 Z8	574754 R 574756 R	124,51 124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
Viega Profipress S	V 12		570107	154,61
	V 15		570115	154,61
	V 18		570125	154,61
	V 22 V 28		570135 570145	154,61 154,61
	V 35		570155	154,61
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
V:	V 35 S (PR-2B)	Z8	574762 R	136,96 154.61
Viega Profipress Therm	V 12 V 15		570107 570115	154,61
i rumpress memi	V 18		570125	154,61
	V 22		570135	154,61
	V 12 S (PR-2B)	Z8	574748 R	124,51
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
Vioga DroP	V 22 S (PR-2B)	Z8	574758 R	124,51
Viega ProPress (ASTM) ¹⁰⁾	VUS ½" (OD 15,9 mm) VUS ¾" (OD 22,2 mm)		571770 571775	186,79 186,79
(10111)	VUS 1" (OD 28,6 mm)		571780	186,79
	VUS 11/4" (OD 34,9 mm)		571785	186,79
	VUS 1½" (OD 41,3 mm)		571790	360,13
	VUS 2" (0D 54,0 mm)		571795	370,51
XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z5	572819 R	609,25
	VUSFz 3" (PR-3B) (OD 79.4 mm)	Z5	572820 R	609,25
XL-C/XL-S XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5 Z5	572821 R	645,58

235

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Viega ProPress 304	VUS ½" (OD 15,9 mm)	-	571770	186,79
FKM (ASTM) ¹⁰⁾	VUS ¾" (OD 22,2 mm) VUS 1" (OD 28,6 mm)		571775 571780	186,79 186,79
	VUS 11/4" (OD 34,9 mm)		571785 571790	186,79
	VUS 1½" (OD 41,3 mm) VUS 2" (OD 54,0 mm)		571795	360,13 370,51
XL-C/XL-S XL-C/XL-S	VUSFz 2½" (PR-3B) (OD 66,7 mm) VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5 Z5	572819 R 572820 R	609,25 609,25
XL-C/XL-S	VUSFz 4" (PR-3B) (OD 104,8 mm)	Z5 Z5	572821 R	645,58
Viega ProPress 316 (ASTM) ¹⁰⁾	VUS ½" (OD 15,9 mm) VUS ¾" (OD 22,2 mm)		571770 571775	186,79 186,79
	VUS 1" (OD 28,6 mm)		571780	186,79
	VUS 1½" (OD 34,9 mm) VUS 1½" (OD 41,3 mm)		571785 571790	186,79 360,13
XL-C/XL-S	VUS 2" (OD 54,0 mm) VUSFz 2½" (PR-3B) (OD 66,7 mm)	Z 5	571795 572819 R	370,51 609,25
XL-C/XL-S	VUSFz 3" (PR-3B) (OD 79,4 mm)	Z5	572820 R	609,25
XL-C/XL-S Viega Propress	VUSFz 4" (PR-3B) (OD 104,8 mm) VAU 15 (OD 12,7 mm)	Z5	572821 R 572687	645,58 159,80
WATER System	VAU 20 (OD 19,1 mm)		572689	159,80
AUS	VAU 25 (OD 25,4 mm) VAU 32 (OD 31,8 mm)		572691 572693	159,80 168,10
	VAU 40 (OD 38,1 mm) VAU 50 (OD 50,8 mm)		572695 572697	249,07 441,10
Viega PropressG	VAU 15 (OD 12,7 mm)		572687	159,80
GAS System AUS	VAU 20 (OD 19,1 mm) VAU 25 (OD 25,4 mm)		572689 572691	159,80 159,80
	VAU 32 (OD 31,8 mm)		572693	168,10
	VAU 40 (OD 38,1 mm) VAU 50 (OD 50,8 mm)		572695 572697	249,07 441,10
Viega Raxinox	VRX 16 VRX 20		571750 571752	196,13 196,13
Viega Raxofix	VRX 16		571750	196,13
	VRX 20 VRX 25		571752 571754	196,13 214.81
	VRX 32		571756	214,81
	VRX 40 VRX 50		571758 571760	298,89 348.72
V: C C:-2)	VRX 63		571797	560,47
Viega Sanfix ²⁾	VP 16/17 ²⁾ VP 20 ²⁾		570910 570915	185,75 185,75
	VP 25 ²⁾ VP 32		570920 570925	185,75 205,47
	VP 40 (PZ-4G)		570970	493,00
	VPz 50 (PZ-S) VPz 63 (PZ-S)		572350 572355	645,58 645,58
Viega Sanfix Fosta ²⁾	VP 16/17 ²⁾		570910	185,75
	VP 20 ²⁾ VP 25 ²⁾		570915 570920	185,75 185,75
	VP 32		570925 570970	205,47 493,00
	VP 40 (PZ-4G) VPz 50 (PZ-S)		572350	645,58
Viega Sanpress	VPz 63 (PZ-S) V 12		572355 570107	645,58 154.61
riega ounpress	V 15		570115	154,61
	V 18 V 22		570125 570135	154,61 154,61
	V 28 V 35		570145 570155	154,61 154,61
	V 42		570165	360,13
	V 42 (PR-2B) V 54	72	572850 R 570175	322,77 370,51
	V 54 (PR-2B)	72	572851 R	348,72
	VR 76,1 (PR-3B) ⁶⁾ VR 88,9 (PR-3B) ⁶⁾	Z5 Z5	572822 R 572823 R	609,25 645,58
	VR 108,0 (PR-3B) ⁶⁾ V 12 S (PR-2B)	Z5 Z8	572824 R	645,58 124,51
	V 15 S (PR-2B)	Z8	574748 R 574752 R	124,51
	V 18 S (PR-2B) V 22 S (PR-2B)	Z8 Z8	574756 R 574758 R	124,51 124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
Viega Sanpress Inox	V 35 S (PR-2B) V 15	Z8	574762 R 570115	136,96 154,61
	V 18 V 22		570125 570135	154,61 154,61
	V 28		570145	154,61
	V 35 V 42		570155 570165	154,61 360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54 V 54 (PR-2B)	Z2	570175 572851 R	370,51 348.72
	VFz 64,0 (PR-3B)6)	Z5	572815 R	609,25
	VFz 76,1 (PR-3B) ⁶⁾ VFz 88,9 (PR-3B) ⁶⁾	Z5 Z5	572816 R 572817 R	609,25 645,58
	VFz 108,0 (PR-3B) ⁶⁾ V 15 S (PR-2B)	Z5 Z8	572818 R	645,58
	V 13 S (PR-2B)	Z8	574752 R 574756 R	124,51 124,51
	V 22 S (PR-2B) V 28 S (PR-2B)	Z8 Z8	574758 R 574760 R	124,51 124,51
V:	V 35 S (PR-2B)	Z8	574762 R	136,96
Viega Sanpress Inox G	V 15 V 18		570115 570125	154,61 154,61
	V 22 V 28		570135	154,61
	V 35		570145 570155	154,61 154,61
	V 42 V 42 (PR-2B)	72	570165 572850 R	360,13 322,77
	V 54		570175	370,51
	V 54 (PR-2B) VFz 64,0 (PR-3B) ⁶⁾	Z2 Z5	572851 R 572815 R	348,72 609,25
		Z5 Z5	572816 R	609,25
	VFz 76,1 (PR-3B)6)			
	VFz 76,1 (PR-3B)** VFz 88,9 (PR-3B)** VFz 108,0 (PR-3B)**	Z5 Z5	572817 R 572818 R	645,58
	VFz 88,9 (PR-3B) ⁶⁾ VFz 108,0 (PR-3B) ⁶⁾ V 15 S (PR-2B)	Z5 Z8	572818 R 574752 R	645,58 645,58 124,51
	VFz 88,9 (PR-3B) ⁶⁾ VFz 108,0 (PR-3B) ⁶⁾	Z5	572818 R	645,58 645,58 124,51 124,51 124,51

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	€
Viega Smartpress	VX 16*		571635	214,81
• .	VX 20*		571640	214,81
	VX 25*		571645	214,81
Viega Temponox	V 15		570115	154,61
	V 18		570125	154,61
	V 22		570135	154,61
	V 28		570145	154,61
	V 35		570155	154,61
	V 42		570165	360,13
	V 42 (PR-2B)	72	572850 R	322,77
	V 54		570175	370,51
	V 54 (PR-2B)	Z2	572851 R	348,72
	VFz 76,1 (PR-3B)6)	Z5	572816 R	609,25
	VFz 88,9 (PR-3B)6)	Z5	572817 R	645,58
	VFz 108,0 (PR-3B)6)	Z5	572818 R	645,58
	V 15 S (PR-2B)	Z8	574752 R	124,51
	V 18 S (PR-2B)	Z8	574756 R	124,51
	V 22 S (PR-2B)	Z8	574758 R	124,51
	V 28 S (PR-2B)	Z8	574760 R	124,51
	V 35 S (PR-2B)	Z8	574762 R	136,96
Viessmann	TH 14*		570455	186,32
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
Vogel & Noot	TH 16*		570460	186,32
EASYTEC	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 50 (PZ-S)		572400	645,58
	TH 63 (PZ-S)		572405	645,58
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 26 S (PR-2B)**	Z8	574794 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
VSH	> Aalberts integrated piping s	ystems		

tegrated piping sys

		W		
Watts MTR	TH 16*		570460	186,32
Art press	TH 20*		570470	186,32
	TH 26*		570475	186,32
	TH 32		570480	186,32
WATTS	US 3/8"*		571450	211,70
RADIANT	US 1/2"*		571455	211,70
Watts WaterPEX	US ¾"*		571460	211,70
	US 1"*		571465	211,70
	US 1 ¼"		571470	211,70
	US 1 ½"		571475	211,70
WATTS	US %"*		571450	211,70
RADIANT	US 1/2"*		571455	211,70
Watts	US ¾"*		571460	211,70
RadiantPEX	US 1"*		571465	211,70
	US 1 1/4"		571470	211,70
	US 1 ½"		571475	211,70
WATTS	U 16 (½")		570765	174,33
RADIANT	U 20 (5/8")		570775	174,33
Watts	U 25 (¾")		570780	174,33
RadiantPEX-AL	U 32 (1")		570785	204,43
Wavin	U 50		570795	298,89
Tigris K1/M1	U 63 (PR-3B)	Z4	572837 R	733,81
	U 63 (PZ-S)		572365	645,58
	U 75 (PR-3B)	74	572828 R	645,58
Wavin	B 16*		570850	203,40
Tigris K5/M5	B 20*		570860	203,40
	B 32		570880	224,16
	H 16*		570320	168,10
	H 20*		570350	168,10
	H 25*		570360	168,10
	H 32		570380	168,10
	H 40 (PZ-4G)		570390	565,67
	TH 16*		570460	186,32
	TH 20*		570470	186,32
	TH 25*		570495	186,32
	TH 32		570480	186,32
	TH 40		570485	246,99
	TH 16 S (PR-2B)**	Z8	574782 R	124,51
	TH 20 S (PR-2B)**	Z8	574788 R	124,51
	TH 25 S (PR-2B)**	Z8	574792 R	124,51
	TH 32 S (PR-2B)	Z8	574798 R	136,96
	U 16*		570765	174,33
	U 20*		570775	174,33
	U 25*		570780	174,33
	U 32		570785	204,43
	U 40		570790	249,07
	UP 16*		572632	174,33
	UP 20*		572636	174,33
	UP 25		572638	174,33
	UP 32		572640	204,43

System	Pressing tongs / pressing rings	Driven by adapter tongs	ArtNo.	
WEECON	M 15		570110	154,6
PRESS-C-Stahl	M 18		570120	154,6
	M 22		570130	154,6
	M 28		570140	154,6
	M 35		570150	154,6
	M 42 (PZ-4G)		570160	498,1
	M 54 (PZ-4G)	70	570170	498,1
	M 42 (PR-3S)	72	572706 R	672,5
	M 54 (PR-3S)	72 74 74 77 74 75 184	572708 R	672,5
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,4
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,5
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,5
	M 15 S (PR-2B)	Z8	574738 R	124,5
	M 18 S (PR-2B)	Z8	574740 R	124,5
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,5
	M 35 S (PR-2B)	Z8	574746 R	136,9
WEECON	M 15		570110	154,
PRESS-Edelstahl	M 18		570120	154,
	M 22		570130	154,
	M 28		570140	154,
	M 35		570150	154,
	M 42 (PZ-4G)		570160	498,
	M 54 (PZ-4G)		570170	498,
	M 42 (PR-3S)	72	572706 R	672,
	M 54 (PR-3S)	72	572708 R	672,
	M 76,1 XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579101 R	1.161,
	M 88,9 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579110 R	1.355,
	M 108,0 G XL (PR-3S)	Z6 XL ³⁾ / Z7 XL 45 kN ⁴⁾	579111 R	1.355,
	M 15 S (PR-2B)	Z8	574738 R	124,
	M 18 S (PR-2B)	Z8	574740 R	124,
	M 22 S (PR-2B)	Z8	574742 R	124,5
	M 28 S (PR-2B)	Z8	574744 R	124,
VEECON	M 35 S (PR-2B) V 15	Z8	574746 R 570115	136,
RESSS-Kupfer	V 18		570115	154,
vesss-vahisi	V 22		570125	
	V 28			154,
			570145	154,
	V 35		570155	154,
	V 42	70	570165	360,
	V 42 (PR-2B)	72	572850 R	322,
	V 54	70	570175	370,
	V 54 (PR-2B)	Z2	572851 R 574752 R	348,
	V 15 S (PR-2B)	Z8		124,
	V 18 S (PR-2B)	Z8	574756 R	124,
	V 22 S (PR-2B)	Z8	574758 R	124,
	V 28 S (PR-2B)	Z8	574760 R	124,
VEM	V 35 S (PR-2B)	Z8	574762 R	136,
VEM	U 16*		570765	174,
VIELAND-WERKE	TH 14 ²⁾ TH 16 ²⁾		570455	186,
uprotherm CTX ²⁾			570460	186,
VKS-Press	TH 14* TH 16*		570455 570440	186, 186,
			570460	
	TH 17*		570462	186,
	TH 20*		570470	186,
	TH 26*		570475	186,
	TH 32		570480	186,
viintu	TH 40		570485	246,
VÜRTH	TH 16*		570460	186,
Vürth	TH 20*		570470	186,
	TH 26* HE 32		570475 571900	186,3 223,

System	Pressing tongs/ pressing rings	Driven by adapter tongs	ArtNo.	•
		X		
XtraConnect	F 16*		570717	177,4
	F 20*		570727	177,45
	F 26*		570730	191,9
	F 32 F 16 S (PR-2B)**	Z8	570735 574728 R	191,9 124,5
	F 20 S (PR-2B)**	Z8	574720 R	124,5
	F 26 S (PR-2B)**	Z8	574732 R	124,5
	F 32 S (PR-2B)	Z8	574734 R	136,9
	H 16*		570320	168,1
	H 20*		570350	168,1
	H 26*		570370	168,1
	H 32		570380	168,1
	TH 16*		570460	186,3
	TH 20*		570470	186,3
	TH 26*		570475	186,3
	TH 32	70	570480	186,3
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 20 S (PR-2B)**	Z8 Z8	574788 R 574794 R	124,5
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	Z8	574798 R	124,5 136.9
	U 16*	20	570765	174,3
	U 20*		570775	174,3
(DN 26)	U 25*		570780	174,3
	U 32		570785	204,4
	VP 16*		570910	185,7
	VP 20*		570915	185,7
	VP 32		570925	205,4
		Z		
ZEWOTHERM	TH 12*		570452	186,32
Zewo Press Premium	TH 16*		570460	186,3
	TH 17*		570462	186,3
	TH 18*		570465	186,3
	TH 20*		570470	186,3
	TH 26* TH 32		570475 570480	186,3
	TH 40		570485	186,3 246,9
	TH 50 (PZ-S)		572400	645,5
	TH 63 (PZ-S)		572405	645,5
	TH 12 S (PR-2B)**	Z8	574776 R	124,5
	TH 16 S (PR-2B)**	Z8	574782 R	124,5
	TH 17 S (PR-2B)**	Z8	574784 R	124,5
	TH 18 S (PR-2B)**	Z8	574786 R	124,5
	TH 20 S (PR-2B)**	Z8	574788 R	124,5
	TH 26 S (PR-2B)**	Z8	574794 R	124,5
	TH 32 S (PR-2B)	Z8	574798 R	136,9
ZEWOTHERM	TH 16*		570460	186,3
Zewo Press PPSU	TH 20*		570470	186,3
	TH 26*		570475	186,3
	TH 32	70	570480	186,3 124,5
	TH 16 S (PR-2B)** TH 20 S (PR-2B)**	Z8 Z8	574782 R 574788 R	124,5
		Z8	574766 K 574794 R	124,5
	1 H 76 S (PR-7R)**		574798 R	136,9
	TH 26 S (PR-2B)** TH 32 S (PR-2B)	78		100,7
7IIRN	TH 32 S (PR-2B)	Z8		
		Z8	571450	211,7
ZURN Industries Zurn Pex	TH 32 S (PR-2B) US 3/8"* US 1/2"*	78	571450 571455	211,7 211,7
INDUSTRIES	TH 32 S (PR-2B) US %"*	Z8	571450 571455 571460	211,7 211,7 211,7
INDUSTRIES	TH 32 S (PR-2B) US %"* US ½"* US ¾"*	ZB	571450 571455	211,70 211,70 211,70 211,70
INDUSTRIES	TH 32 S (PR-2B) US %"* US ½"* US ¾"* US 1"*	Z8	571450 571455 571460 571465	211,70 211,70 211,70 211,70 211,70 211,70

237

Pressfitting systems for gas installations must only be pressed with pressing tongs/pressing rings which are highlighted in yellow.

Observe the national regulations. Read and observe the instructions for use and the installation instructions of the system provider/manufacturer.

- * Can also be driven by the REMS Eco-Press manual radial press, see page 185. Observe the national regulations.
- ** Can also be driven by the REMS Eco-Press manual radial press using the Z8 adapter tongs, see page 185. Observe the national regulations.
- 10 Only pressing tongs from designation "108" (1st quarter of 2008), "208" (2nd quarter of 2008) etc. can be used. The designation is stamped on every pressing jaw.
- ²⁾ For this pressfitting system producing a pressing joint with manual radial presses is not permitted.
- 3) Driven by REMS Power-Press XL ACC, see page 188.
- $^{\scriptscriptstyle (4)}$ Driven by REMS Akku-Press XL 45 kN 22 V ACC, see page 196.
- 5) For taking suitable pressing inserts.
- Press fittings made of red bronze (Sanpress XL) must be pressed with pressing rings with press contour VR, copper fittings (Profipress XL, Profipress G XL), carbon steel (Prestabo XL) and stainless steel fittings (Sanpress Inox XL, Sanpress Inox G XL) with pressing rings with press contour VF.
- $^{7)}$ Use pressing rings labelled "M 88.9 G" or "M 108 G" on the three pressing segments for gas installations.
- $^{8)}~$ For making press joints for operating pressure \leq PN 10.
- 9) For pipes of the EN technical standard. Observe the instructions for use of the system provider/manufacturer.
- 10) For pipes of the ASTM technical standard. Observe the instructions for use of the system provider/manufacturer.
- $^{11)}$ Only use pressing tongs identified by "VMP $\frac{1}{2}$ " G" on the pressing jaws for gas installations.
- ¹²⁾ Previous designation: C 26 pressing tongs

The suitability of REMS pressing tools for pressfitting systems: Date 27.10.2023. For the updated situation regarding suitability status check our website: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.
See page 238 for adapter tongs. Pressing tongs/pressing rings for additional pressfitting systems on request.

Accessories

Description	ArtNo.	€
Adapter tongs Z8 for driving REMS pressing rings S (PR-2B)	574702R	144,28
Adapter tongs Z2 for driving REMS pressing rings M 35–54 (PR-3S), V 42–54 (PR-2B), RN 40–50 (PR-3S)	572795R	144,28
Adapter tongs Z4 for driving REMS pressing rings F 75 (PR-3B), TH 63 – 75 (PR-3B), U 63 – 75 (PR-3B), RN 63 (PR-3B)	572801 RX	310,36
Adapter tongs Z5 for driving REMS pressing rings VFz/VR $64-108$ (PR-3B), VMPz $1\frac{1}{2}-2$ " (PR-3B), VUSFz $2\frac{1}{2}-4$ " (PR-3B), VAUFz $65-100$ (PR-3B)	572802RX	310,36
Adapter tongs Z6 XL For driving REMS pressing rings 64.0 – 108.0 XL (PR-3S), 2½ – 4" XL (PR-3S) with REMS Power-Press XL ACC	579120R	373,68
Adapter tongs Z7 XL 45 kN for driving REMS pressing rings $64.0-108.0$ XL (PR-3S), $2\frac{1}{2}-4$ " XL (PR-3S), $2\frac{1}{2}-4$ " XL (PR-3B) with REMS Akku-Press XL 45 kN 22 V ACC	579123R	394,44
Steel case with insert for 6 pressing tongs (up to Ø 35 mm/1" and pressing tongs U 40, U 50, TH 40, F 40, F 50, G 40, VUS 1½")/cropping tongs and compartment for pipe cutter up to 42 mm	570295R	96,53
Steel case with insert for 2 pressing tongs (M 42 (PZ-4G), M 54 (PZ-4G), V 42, V 54, H 40, H 40 A, VUS 1½", VUS 2")	570290R	96,53
Steel case with insert for adapter tongs Z2 and pressing rings M 42 (PR-3S) and M 54 (PR-3S) or pressing rings SA 42 (PR-3S) and SA 54 (PR-3S).	572810R	96,53
Steel case with insert for adapter tongs Z5 and 4 pressing rings VFz 64.0 – 108.0/VR 76.1 – 108.0/VUSFz 2½ – 4" (PR-3B) or for adapter tongs Z5 and 1 pressing tong VMPz 1½ (PZ-S) and 2 pressing rings VMPz 1½ – 2" (PR-3B)	572809R	110,03
Steel case with insert for adapter tongs Mini Z8 and adapter tongs Z8 as well as 6 REMS pressing rings S (PR-2B)	574516R	96,53
L-Boxx system case with inlay for Mini Z8 adapter tongs and Z8 adapter tongs as well as 14 REMS S pressing rings (PR-2B)	574704R	146,36
L-Boxx system case with inserts for 8 pressing tongs (2B) and 6 pressing rings S (PR-2B)	571136R	146,36
L-Boxx system case with inserts for 3 different pressing rings VMPz 2½ – 4" XL (PR-3B)	571137R	146,36
XL-Boxx system case with inserts for 3 different pressing rings 64.0 – 108.0 XL (PR-3S) or 2½ – 4" XL (PR-3S)	579603R	248,08
Steel case with inserts for adapter tongs Z2 and pressing rings V 42 (PR-2B) and V 54 (PR-2B)	572813R	55,01





Confirmation of suitability

The suitability of crimping tools is determined basically by the manufacturer of crimping tools. Moreover the suitability of REMS crimping tools has been confirmed by the system manufacturer/supplier himself or approved through independent testing institutes.

Confirmation of suitability through the system manufacturer/supplier

More than 90 % of the manufacturers/suppliers of the pressfitting systems listed herein have tested REMS pressing tongs and confirmed the suitability for their pressfitting system.

Confirmation of suitability through independent testing institutes

The suitability of REMS pressing tongs for additional pressfitting systems have been confirmed through independent technical institutes:

TÜV-Certificates

Exist for Geberit Mepla, Geberit Mapress C-STAHL, Geberit Mapress EDELSTAHL, Geberit Mapress Kupfer, Nussbaum Cupress, Nussbaum Optipress, Uponor Unipipe, Viega-'profipress', Viega-'profipress G', Viega-'sanfix P', Viega-'sanpress', Viega-'Viegatherm P', Wavin Tigris. The TÜV-certificates confirm that REMS crimping tools are suitable for producing perfect and system-conformity pressing joints corresponding to these systems.

Suitability test according to DVGW W 534 (potable water)

Pressing joints produced with REMS pressing tools were tested by the state-operated material testing institute in Darmstadt/Germany or the material testing institute of the Land of North-Rhine-Westphalia, Germany according to DVGW work sheet W 534. These material testing institutes are certified by the DVGW for making these tests. A representative cross-section of press joints of pressfitting systems Geberit Mapress Edelstahl, Raccorderie Metalliche inoxPRES, Raccorderie Metalliche steelPRES, Uponor Unipipe, Viega Megapress, Viega Profipress and Viega Raxofix. was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.

Suitability test according to DVGW G 5614/VP 625 or prEN 1254-7 (gas)

Pressing joints made with REMS pressing tools have been tested by the TÜV or by the Land Material Testing Institute Nordrhein-Westfalen or the DVGW Research Institute Karlsruhe according to DVGW Regulations G 5614/VP 625 or by the BSI (UK) according to prEN 1254-7. A representative cross-section of pressing joints of the pressfitting systems Geberit Mapress Edelstahl Gas, Geberit Mapress Kupfer Gas, Henco Gas, IBP >Bpress Gas, Kembla KemPress Gas, Pegler Yorkshire X-Press Copper Gas, Raccorderie Metalliche inoxPRES Gas, Uponor MLC-G, Valsir PEXAL Gas, Viega Profipress G, Viega Pexfit G, Viega Sanpress INOX G, Viega PropressG GAS System (AUS) was tested. The tests led to the result that all REMS pressing tools are suitable for producing perfect and system conformity pressing joints in accordance with these systems.









Hold-Harmless and Indemnification Agreement

REMS is the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools.

A hold-harmless and indemnification agreement exists with the:

Zentralverband Sanitär Heizung Klima (Central Organization for the Sanitary-, Heating- and Climatization Industries), Rathausallee 6, D-53757 St. Augustin, referred to in the following as "ZVSHK",

Bundesindustrieverband Technische Gebäudeausrüstung e.V., Hinter Hoben 149, 53129 Bonn, referred to in the following as "BTGA",

Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (German Association for Coolant & Air-Conditioning Profession Industries), Kaiser-Friedrich-Straße 7, D-53113 Bonn, referred to in the following as "VDKF",

Schweizerisch-Liechtensteinischem Gebäudetechnikverband (Swiss-Liechtenstein Technical Building Association), Auf der Mauer 11, CH-8023 Zürich, referred to in the following as "suissetec",

The Zentralverband Sanitär Heizung Klima (ZVSHK), the Bundesindustrieverband Technische Gebäudeausrüstung e. V. (BTGA), the Verband Deutscher Kälte-Klima-Fachbetriebe e. V. (VDKF) and the Schweizerisch-Liechtensteinische Gebäudetechnikverband (suissetec) have made liability acceptance agreements in the interests of trade and industry with REMS GmbH & Co KG (REMS) for the radial pressing tools.

- Manual radial press REMS Eco-Press
- Cordless radial press REMS Mini-Press 14V ACC
- Cordless radial press REMS Mini-Press 22 V ACC
- Cordless radial press REMS Mini-Press S 22V ACC
- Electric radial press REMS Power-Press SE
- Electro-hydraulic radial press REMS Power-Press ACC
- Electro-hydraulic radial press REMS Power-Press XL ACC
 Cordless radial press REMS Akku-Press E 22V ACC
- Cordless radial press REMS Akku-Press 22 V ACC
- Cordless radial press REMS Akku-Press 22 V Connected
- Cordless radial press REMS Akku-Press XL 45 kN 22V ACC
- REMS pressing tongs
- REMS pressing rings
- REMS pressing tongs Mini

This makes REMS the first system-independent machine- and tool manufacturer to have concluded a hold-harmless and indemnification agreement for pressing tools. The conclusion of the agreement was effected on the basis of a successful cooperation established on partnership between REMS, the crafts, trades and industry and their organizations.

Eligible for services and performances from this agreement are all independent professional craftsmen, and companies of such, who are enrolled in the register of artisans and craftsmen (referred to in the following as "SHK-Establishments"), in as far as they have been members of the crafts guild of the sanitary- heatingand climatization enterprises competent for their business location at the time the damage event has arisen, and this crafts guild is associated with a regional guild association, which is a member of the ZVSHK.

Entitled to the services from the agreement with the BTGA are all building technology companies (hereinafter referred to as "TGA companies") insofar as they were a member of the Land Industry Association Technical Building Equipment responsible at the seat of their company at the time of the damage case and therefore an indirect member of the BTGA or direct member of the BTGA.


Eligible for services and performances from this agreement with the VDKF are all coolant systems companies or professional organisations (referred to as Coolant and Air-Conditioning Profession Industries) who, at the time the damage is caused, are members of the VDKF.

Eligible for services and performances from this agreement are all building systems companies (following TGA companies) who, at the time the damaged is caused, are members of suissetec.

In as far as the radial pressing tools mentioned show a defect with regard to construction, manufacture or material, or if the operator's manuals are faulty, thereby causing damage for the customer of the SHK-establishment, the Coolant and Air-Conditioning Profession Industries, or the TGA-companies, for which the SHK-establishment or the TGA-company is liable, then REMS shall be additionally liable - aside of the statutory prescriptions – for the consequences resulting from leakage, in accordance with the stipulations and provisions of this hold-harmless

The assumption of liability agreements apply regardless of which pressfitting system is pressed with the suitable REMS pressing tools. The current status regarding suitability of the REMS pressing tools for pressfitting systems can be viewed on the Internet: www.rems.de > Downloads > Product catalogues, brochures > REMS Catalogue.

For further information, please contact: info@rems.de

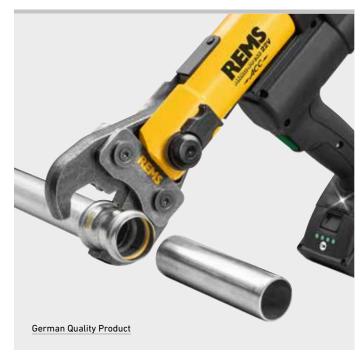

Reliable and safe: REMS was the first system-independent machine and tool manufacturer to sign liability acceptance agreements for pressing tools as early as the year 2000.









REMS cropping tongs

High performance cropping tongs in forged and specially hardened steel for cutting threaded rods.

Steel, stainless steel up to

hardness classification 4.8 (400 N/mm²) M 6-M 12

REMS cropping tongs - for cutting threaded rods.

Made of forged and specially hardened steel.

Reversible cropping inserts for double service life.

M cropping inserts with high precision thread contour machined on CNC machining centres for exact guiding of the threaded rod in the cutting process Pliers parts, cropping inserts and specially machined and hardened cutting edges, made to fit exactly, for cutting without burr

Threaded rod can be screwed into a threaded connection of the pipe clip or the nut without rework after cutting

Cutting device in pliers design (Patent EP 1 459 825, patent US 7,284,330). Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force. All cropping tongs marked with * have an optional connection for manual drive through the radial press REMS Eco-Press.









German Quality Product



Patent EP 1 459 825 Patent US 7,284,330

Supply format

REMS cropping tongs. Cropping tongs with 1 pair of reversible cropping inserts for steel, stainless steel, M 6-M 12. In a carton.

Description	for threaded rods	ArtNo.	€
REMS cropping tongs M 6*	M 6	571890	241,85
REMS cropping tongs M 8*	M 8	571895	241,85
REMS cropping tongs M 10	M 10	571865	241,85
REMS cropping tongs M 12	M 12	571870	241,85

Accessories

Description	for threaded rods	ArtNo.	€
Cropping inserts M 6 (pair)	M 6	571891	111,07
Cropping inserts M 8 (pair)	M 8	571896	111,07
Cropping inserts M 10 (pair)	M 10	571866	111,07
Cropping inserts M 12 (pair)	M 12	571871	111,07
Steel case with insert for 6 cro	opping tongs/pressing		
tongs and compartment for pip	570295R	96,53	





Accessories for REMS radial presses (except for REMS Mini-Press) and suitable radial presses of other makes

REMS cable shear

High-grade cable shear in forged and specially hardened steel for cutting electric cable.

Electric cable

 $\leq 300 \text{ mm}^2 (\text{Ø } 30 \text{ mm})$

REMS cable shear - Easy cutting of electric cable.

Made of forged and specially hardened steel.

Replaceable cutting blades manufactured on CNC production centres ensure a precision blade geometry and long service life. Large cutting range.

Driven by REMS radial presses 32 kN and suitable radial presses of other makes with 32 kN thrust force





German Quality Product



Supply format


REMS cable shear. Cable shears with 2 changeable cable cutters for electric cables $\leq 300 \text{ mm}^2 (\emptyset 30 \text{ mm})$. In a carton

ArtNo.	€
571887	396 52

Accessories

Description	ArtNo.	€
Cable cutters (pack of 2)	571889R02	111,07



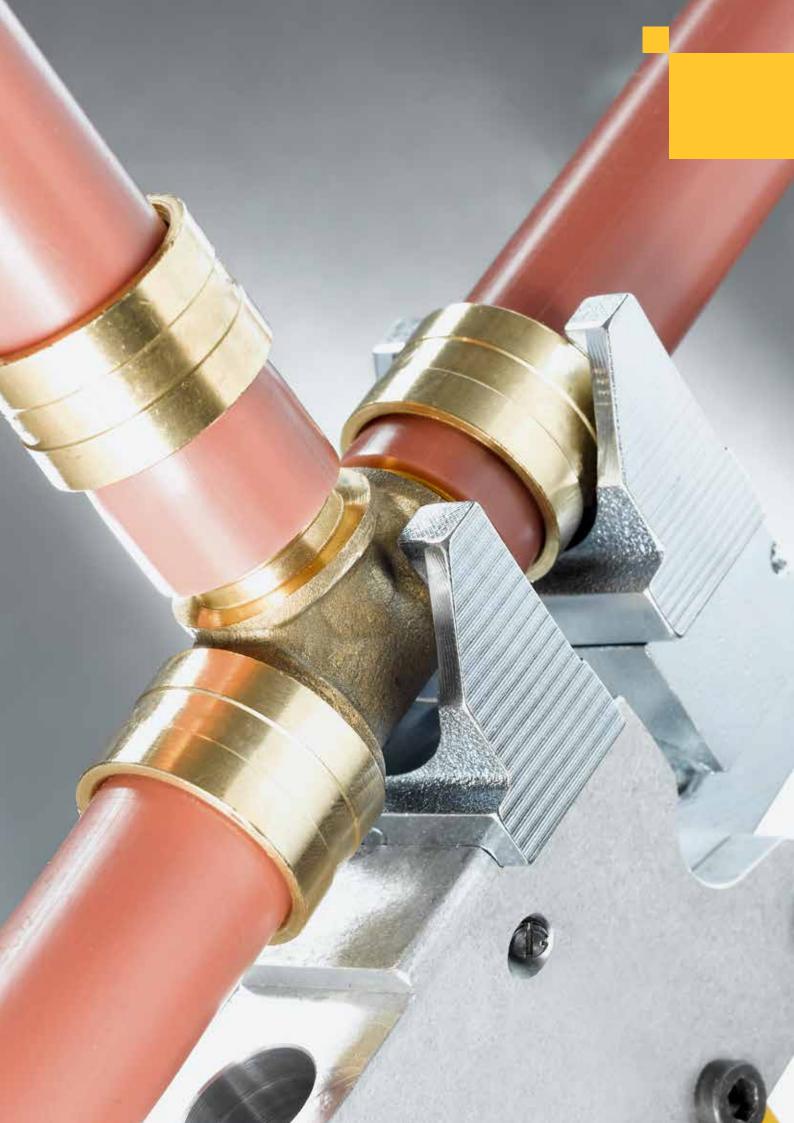

Axial Press Jointing



Compact, handy electric tool for producing compression sleeve joints with crimping sleeve. For trade and industry. For the building site and the workshop. Li-Ion 22V Technology. For battery and corded operation.

Axial compression

Ø 12-32 mm

REMS Ax-Press 30 22V – up to Ø 32 mm. Ultra light, ultra small, ultra handy, ultra fast. Li-Ion 21.6 V, 2.5 Ah battery for approx. 220 pressings Georg Fischer pfci ALUPEX-EXPRESS Ø 16 mm with one battery charge*.

Compression heads for all common systems

Complete assortment of REMS compression heads for all common compression sleeve systems with crimping sleeve. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and correspond to the respective compression sleeve system. Thus perfect system-conformity, safe jointing.

Design

Compact, handy, light. Drive unit with battery only 4.6 kg. Vertically from the drive unit located pressing device for seating the compression heads. Can be used anywhere, free hand, over head, in confined spaces. Optimum weight distribution for one-hand operation. Drive unit with inserted compression heads can be put down on the battery ready to pick up. Ergonomically designed housing with soft grip. LED work light for illuminating the work place. Compression heads and expander heads quickly interchangeable, without tools. Secure spring lock seating of compression heads.

Drive

High pressing force for perfect pressing in seconds, e.g. Ø 26 mm in only 5 s. Thrust force 30 kN. Powerful electro-hydraulic drive, eccentric reciprocating pump with robust planetary gear. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system.Safety tip switch.

Battery or mains operation

Li-lon 22 V Technology. Highly resistant Li-lon 21.6 V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6 V, 2.5 Ah battery for approx. 220 pressings, 4.4 Ah for approx. 380 pressings, 5.0 Ah for approx. 430 pressings, 9.0 Ah for approx. 780 pressings Georg Fischer pfci ALUPEX-EXPRESS Ø 16 mm with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100-240V, 90W. Rapid charger 100-240V, 290W, for shorter charging times, as accessory. Voltage supply $220-240V/21.6V, 15\,A$ output, for mains operation instead of Li-lon battery $21.6\,V,$ as accessory.

Supply format

REMS Ax-Press 30 22V Basic-Pack. Cordless axial press 30 kN for producing compression sleeve joints with crimping sleeve Ø 12-32 mm. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch. LED work light. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220-240V, 50-60 Hz, 70W. In sturdy steel case.

€	ArtNo.	
2.117,52	573018R220	



German Quality Product







Accessories

Description	ArtNo.	€	
REMS Ax-Press 30 22V drive unit, without battery	573008R22	1.577,76	
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46	
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64	
Battery Li-lon 21.6 V, 5.0 Ah	571581R22	310,36	
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16	
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585R220	175,42	
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587R220	414,16	
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A, for mains operation instead of battery Li-lon 21.6 V.	571567 R220	414,16	
Steel case with insert	573282R	110,03	
REMS Lumen 2800 22 V, cordless LED flood light, see page 111			

REMS compression heads				
Compression sleeve system	Compression head	ArtNo.	€	
Brasstech Raptor/ Metalpex/ Raptor 2/ MULTItermoSAN	ME 14 (pack of 2) ME 16 (pack of 2) ME 20 (pack of 2) ME 26 (pack of 2) ME 32 (pack of 2)	573100 573102 573106 573108 573110	107,95 107,95 107,95 107,95 118,33	
General Fittings Serie 5400	ME 14 (pack of 2) ME 16 (pack of 2) ME 20 (pack of 2) ME 26 (pack of 2) ME 32 (pack of 2)	573100 573102 573106 573108 573110	107,95 107,95 107,95 107,95 118,33	



REMS compression heads			
Compression sleeve system	Compression head	ArtNo.	€
Georg Fischer pfci	ME 16 (pack of 2)	573102	107,95
ALUPEX-EXPRESS/	ME 20 (pack of 2)	573106	107,95
Alupex Gas System	ME 26 (pack of 2)	573108	107,95
Logstor	ME 16 (pack of 2)	573102	107,95
	LR 20 (pack of 2)	573430	107,95
	LR 22 (pack of 2)	573432	107,95
	LR 25 (pack of 2)	573434	107,95
	LR 28 (pack of 2)	573436	107,95
	LR 32 (pack of 2)	573438	118,33

Universal manual axial press for producing compression sleeve joints.

Axial compression

Ø 12 – 32 mm

REMS Ax-Press HK – universal up to Ø 22 mm Ultra small, ultra light, ultra handy. Only 1.1 kg REMS Ax-Press H – universal up to Ø 32 mm. Handy and light. Only 1.4 kg.

Complete assortment of REMS compression heads, quickly interchangeable.

System advantage

Only **one** type of compression heads for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 22 V ACC, REMS Ax-Press 25 L 22 V ACC. Thus easy, economic stocking.

Compression heads

Full range of REMS compression heads for all common compression sleeve systems (page 248–249). Choice of REMS compression heads with spring lock for seating common compression inserts. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and meet the demands of compression sleeve systems. Thus perfect system-conformity, safe jointing.

Twin compression heads

REMS twin compression heads with two holders each which interleave, for pipe unions of different dimensions (page 248). No need to change compression heads. Extremely simple, saves time.

Design

Compact, job site proven. Handy and light. REMS Ax-Press HK drive unit only 1.1 kg. REMS Ax-Press H drive unit only 1.4 kg. Works anywhere, free-hand, also in tight spots. 66 mm stroke. Quick-acting forward and release for easy, fast operation. Selectable compression head position (Patent DE 10 2004 018 429, Patent ES 2 273 563, Patent FR 05 03513) for pressing compression sleeve connectors with a clamping distance of \leq 161 mm in one action and for double pressings. Quick-change compression heads and pressing inserts without tools. Secure fit of compression heads and pressing inserts by spring catch. REMS Ax-Press H with overload protection.

Expanding

Various pipe expanders and complete range of REMS expanding heads for all common compression sleeve systems (page 253 – 257).











German Quality Product





Supply format

REMS Ax-Press HK drive unit. Axial press for single-handed operation for producing compression sleeve joints Ø 12–22 mm. 66 mm stroke. With quick-acting forward and release. For driving REMS compression heads. In a carton.

ArtNo.	€
574302R	206.56

Supply format

REMS Ax-Press H drive unit. Manual axial press for producing compression sleeve joints \emptyset 12–32 mm. 66 mm stroke. With quick-acting forward and release. For driving REMS compression heads. In a carton.

ArtNo.	€
574300RX	289,60

Accessories

Description	ArtNo.	€
REMS compression heads see page 248 – 249.		
Carrying bag for REMS Ax-Press HK/H drive unit and compression heads	574437 R	45,67
Case with inlay for REMS Ax-Press HK drive unit and compression heads	574352R	64,36





Compact, handy power tool with automatic return for manufacturing compression sleeve joints. Li-Ion 22 V Technology. For battery and corded operation. For trade and industry. For the building site and the workshop.

Axial compression

Ø 12 – 40 mm

REMS Ax-Press 25 22 V ACC – universal up to Ø 40 mm. Super light, super handy. Fast. With automatic return. Optimum weight distribution for single-hand operation. Swivelling compression device. Li-lon 21.6 V, 2.5 Ah battery for approx. 500 pressings REHAU RAUTITAN PX Ø 16 mm with one battery charge*.

System advantage

Only **one** type of compression heads for REMS Ax-Press HK, REMS Ax-Press H, REMS Ax-Press 25 22 V ACC, REMS Ax-Press 25 L 22 V ACC. Thus easy, economic stocking.

Compression heads for all common systems

Full range of REMS compression heads for all common compression sleeve systems (page 248–249). Choice of REMS compression heads with spring lock for seating common compression inserts. High-grade compression heads in forged and specially hardened steel. The REMS compression heads are system-specific and meet the demands of compression sleeve systems. Thus perfect system-conformity, safe jointing.

Twin compression heads

REMS twin compression heads with two holders each which interleave, for pipe unions of different dimensions (page 248). No need to change compression heads. Extremely simple, saves time.

Design

Compact, handy, light. REMS Ax-Press 25 22 V ACC drive machine with battery weighs only 3.0 kg, only 28 cm long REMS Ax-Press 25 L 22 V ACC drive machine with battery weighs only 3.2 kg, only 31 cm long REMS Ax-Press 25 22 V ACC and REMS Ax-Press 25 L 22 V ACC with 40 mm stroke respectively REMS Ax-Press 25 L 22 V ACC with 40 mm stroke respectively REMS Ax-Press 25 L 22 V ACC with a clamping distance a \leq 82 mm in one action REMS Ax-Press 25 L 22 V ACC with selectable compression head position for pressing compressing compressing sleeve connectors with a clamping distance a \leq 116 mm in one action and for double pressings. Works anywhere, free-hand, overhead, in confined areas. Optimum weight distribution for single-hand operation. Ergonomically shaped housing with recessed grip. LED work light for illuminating the work place. Swivelling compression device for working in confined area. Compression heads quickly interchangeable, without tools. Secure spring lock seating of compression heads.

Drive

Enormous pressing force for fast and perfect jointing. Thrust force REMS Ax-Press 25 22 V 20 kN, thrust force REMS Ax-Press 25 L 22 V 13 kN. Powerful electro-hydraulic drive with automatic return (ACC), eccentric reciprocating pump with robust planetary gear. Powerful electro-hydraulic drive with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Li-lon 21.6 V, 2.5 Ah battery for approx. 500 pressings, 4.4 Ah for approx. 880 pressings, 5.0 Ah for approx. 1800 pressings REHAU RAUTITAN PX Ø 16 mm with one battery charge*. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240 V, 90 W. Rapid charger 100 – 240 V, 290 W, for shorter charging times, as accessory. Voltage supply 220 – 240 V/21.6 V, 15 A output, for mains operation instead of Li-lon battery 21.6 V, as accessory.

Expanding


Various pipe expanders and complete range of REMS expanding heads for all common pressure sleeve systems





German Quality Product





Supply format

REMS Ax-Press 25 22V ACC Basic-Pack. Cordless axial press 20 kN for producing compression sleeve joints Ø 12-40 mm. 40 mm stroke, for pressing compression sleeve connections with a clamping distance a ≤ 82 mm. For driving REMS pressing heads. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch, swivelling pressing device. LED work light. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220-240 V or 110 V, 50-60 Hz, 70 W. Without compression heads. In sturdy steel case.

ArtN	l o. €
573022R	1.505,10

Other voltages on request.





Supply format

REMS Ax-Press 25 L 22V ACC Basic-Pack. Cordless axial press 13 kN for producing compression sleeve joints Ø 12-40 mm. 40 mm stroke, for pressing compression sleeve connections with a clamping distance a ≤ 116 mm. For driving REMS pressing heads. Electro-hydraulic drive with powerful battery motor 21.6 V, 380 W, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety tip switch, swivelling pressing device. LED work light. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220-240 V or 110 V, 50-60 Hz, 70 W. Without compression heads. In sturdy steel case.

€	ArtNo.
1.505,10	573023R220

Other voltages on request.





Accessories

Description	ArtNo.	€
REMS compression heads see page 248–249.		
REMS Ax-Press 25 22 V ACC drive unit,	F#0000 D00	4 050 50
a ≤ 82 mm, without battery	573020R22	1.079,52
REMS Ax-Press 25 L 22V ACC drive unit, a ≤ 116 mm, without battery	573021R22	1.079,52
Battery Li-lon 21.6 V, 2.5 Ah	571571R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100-240 V, 50-60 Hz, 90 W	571585 R220	175,42
Rapid charger 100-240 V, 50-60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A,		
for mains operation instead of battery Li-lon 21.6 V.	571567 R220	414,16
Steel case with insert	578290R	110,03
REMS Lumen 2800 22V, cordless LED flood light, see p	page 111	





REMS compression heads



REMS compression heads with spring lock for commercially available press inserts

Description	Use
Compression head Basic 20 (pack of 2)	for pipe fittings 20 mm and for standard press inserts outer Ø 20 mm
Compression head Basic 25 (pack of 2)	for pipe fittings 25 mm and for standard press inserts outer Ø 25 mm
Compression head Basic 32 (pack of 2)	for pipe fittings 32 mm and for standard press inserts outer Ø 32 mm

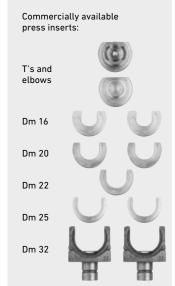








RFMS twin compression heads

KEMS (Will compress)	on neaus
Description	Use
Twin compression head	for pipe fittings 16 and 20 mm





Description	Use
Compression head UNI T/L (piece)	for T-pieces, elbows, splitters, in combination with an additional compression head; for transition pieces, in combination with a support bol















REMS support bolt for transition pieces					
Description	for transition pieces inch	ArtNo.	€		
Support bolt 3/8"	3/8	573647R	12,98		
Support bolt 1/2"	1/2	573648R	14,95		
Support bolt ¾"	3/4	573649R	16,82		

REMS compression heads

Select compression heads yourself!

Search for the required compression sleeve system in the table below and select the correct compression heads.

High-grade compression heads in forged and specially hardened steel. Quickly interchangeable, without tools. The REMS compression heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, safe jointing. Drive through REMS axial presses.







Pressure sleeves system	Compression head mm	Number of pressing heads	F HK ¹⁾		its Ax-Pre: 25	ss 25L	ArtNo.	€
AC-FIX (Global Piping System)	UNI 12 UNI 16 UNI 20 UNI 25 UNI 32 UNI T/L** Basic 20*	2 2 2 2 2 1 2 2 2	:	:	23	•	573630 573632 573636 573640 573644 573646 R	107,95 107,95 107,95 107,95 107,95 107,33 119,37
aquatherm	Basic 25* Basic 32* AT 16 AT 20 AT 25 AT 32	2 2 2 2 2 2 2 2	:	:	:	:	573616 573628 573120 573122 573124 573126	119,37 119,37 107,95 107,95 107,95 118,33
BARBI GLADIATOR (Industrial Blansol)	AT 40 UNI 18 UNI 22 UNI 26 UNI 26 UNI 32 UNI 40 UNI T/L** Basic 20* Basic 25* Basic 32*	2 2 2 2 2 2 2 1 2 2 2 2 2 2 2 2 2 2 2 2	•		•		573128 573634 573638 573642 573644 573652 573646 R 573624 573616 573628	128,71 107,95 107,95 107,95 107,95 128,71 107,33 119,37 119,37
BARBI RETICULADO (Industrial Blansol)	UNI 12 UNI 12 UNI 20 UNI 25 UNI 32 UNI 40 UNI T/L** Basic 20* Basic 25* Basic 32*	2 2 2 2 2 2 2 1 2 2 2	:				573630 573632 573636 573640 573644 573652 573646 R 573624 573616 573628	107,95 107,95 107,95 107,95 107,95 107,95 128,71 107,33 119,37 119,37
FERRO systems BRASELI GPF AXIAL	UNI 12 UNI 12 UNI 20 UNI 25 UNI 32 UNI 7/L** Basic 20* Basic 25* Basic 32*	2 2 2 2 2 2 1 2 2 2					573630 573632 573636 573640 573644 573646 R 573624 573616 573628	107,95 107,95 107,95 107,95 107,95 107,33 119,37 119,37
Brass & Fittings PRESSMAN PowerFit	UNI 16 UNI 20 UNI 25 UNI 32 UNI T/L** Basic 20* Basic 25* Basic 32*	2 2 2 2 2 1 2 2 2	:				573632 573636 573640 573644 573646 R 573624 573616 573628	107,95 107,95 107,95 107,95 107,95 107,33 119,37 119,37
COMAP PEXY	UNI 12 UNI 16 UNI 20 UNI 25 UNI 32 UNI 7/L** Basic 25* Basic 32*	2 2 2 2 2 2 2 1 2 2					573630 573632 573636 573640 573644 573646 R 573616 573628	107,95 107,95 107,95 107,95 107,95 107,33 119,37
EUROP'FLUIDES HYDROFLUIDES	UNI 12 UNI 16 UNI 20 UNI 25 UNI 32 UNI T/L** Basic 25* Basic 32*	2 2 2 2 2 2 1 2 2					573630 573632 573636 573640 573644 573646 R 573616 573628	107,95 107,95 107,95 107,95 107,95 107,33 119,37
Fittings Estándar	UNI 12 UNI 16 UNI 20 UNI 25 UNI 32 UNI 7/L** Basic 20* Basic 25* Basic 32*	2 2 2 2 2 2 1 2 2 2					573630 573632 573636 573640 573644 573646 R 573624 573616 573628	107,95 107,95 107,95 107,95 107,95 107,33 119,37 119,37
General Fittings Serie 3400 PEX Gold-Fix	RE 16 RE 20 RE 25 RE 32 RO 16 RO 20	2 2 2 2 2 2 2					573160 573162 573172 573178 573184 573186	107,95 107,95 107,95 107,95 107,95 107,95
General Fittings Serie 3400 PEX/AL/PEX Gold-Fix	RE 16 RE 20 RE 25 RE 32 RO 16 RO 20	2 2 2 2 2 2 2			:		573160 573162 573172 573178 573184 573186	107,95 107,95 107,95 107,95 107,95 107,95
General Fittings Serie 3400 PEX Gold-Therm	RH 17 RH 20	2 2			:		573168 573170	107,95 107,95
HERZ QUICK FIX	HC 16 HC 20 HC 26 HC 32	2 2 2 2		:	:	:	573112 573114 573116 573118	107,95 107,95 107,95 118,33
IVT PRINETO	IV 16/17 IV 20/21 IV 25/26 IV 32/33	3 3 3 3					573320 573325 573330 573335	161,93 161,93 161,93 161,93

Pressure sleeves system PB TUB Sertigliss PLÁSTICOS FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) PLUMBING PLUS SIZIPEX Sleeve Gas (AUS) REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S (REHAU HAS) REHAU REHAU (BBR) REVEL-PEX	Nead mm UNI 12 UNI 16 UNI 20 UNI 25 UNI 71.** Basic 32* UNI 17.** Basic 32* UNI 16 UNI 25 UNI 17.** Basic 32* UNI 16 UNI 25 UNI 17.** Basic 32* UNI 16 UNI 25 UNI 17.** Basic 20* Basic 25* Basic 32* RH 16 L RH 16 L RH 16 L RH 25 RH 32 RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 17 RH 20 RH 25 RH 32 RH 16 L RH 17 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32	pressing heads 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	HK ^D	H · · · · · · · · · · · · · · · · · · ·	ax-Pre 25	25L	573630 573630 573632 573640 573644 573646 573628 573632 573636 573640 573644 573644 573644 573646 573624 573616 573150 573152 573156 573156 573156 573166 573166 573166 573166 573166 573166 573166 573166 573170 573156 573170 573156 573170 573156 573170 573156	107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 107,91 10
PLÁSTICOS FERRO FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S REHAU RAUTHERM S REHAU RAUTHERM S REHAU RAUTHERM S REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU	UNI 16 UNI 25 UNI 25 UNI 71.** Basic 32* UNI 17.** Basic 32* UNI 16 UNI 25 UNI 17.** Basic 32* UNI 16 UNI 25 UNI 17.** Basic 25* Basic 32* UNI 16 UNI 25 UNI 17.** Basic 25* Basic 32* RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 17 RH 20 RH 25 RH 32 RH 16 RH 25 RH 32 RH 16 RH 26 RH 27 RH 27 RH 28 RH 28 RH 29 RH 27 RH 28 RH 29 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 21 RH 20 RH 21 RH 20 RH 21 RH 20 RH 21 RH 20 RH 21	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:	•			573632 573636 573640 573644 573646 573628 573616 573628 573636 573640 573644 573646 573628 573150 573150 573150 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156	107,9; 107,9; 107,9; 107,9; 107,9; 119,3; 119,3; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 10
PLÁSTICOS FERRO FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S REHAU RAUTHERM S REHAU RAUTHERM S REHAU RAUTHERM S REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU	UNI 16 UNI 25 UNI 25 UNI 71.** Basic 32* UNI 17.** Basic 32* UNI 16 UNI 25 UNI 17.** Basic 32* UNI 16 UNI 25 UNI 17.** Basic 25* Basic 32* UNI 16 UNI 25 UNI 17.** Basic 25* Basic 32* RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 17 RH 20 RH 25 RH 32 RH 16 RH 25 RH 32 RH 16 RH 26 RH 27 RH 27 RH 28 RH 28 RH 29 RH 27 RH 28 RH 29 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 27 RH 20 RH 21 RH 20 RH 21 RH 20 RH 21 RH 20 RH 21 RH 20 RH 21	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:				573632 573636 573640 573644 573646 573628 573616 573628 573636 573640 573644 573646 573628 573150 573150 573150 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156	107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9
FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	UNI 25 UNI 71.1** Basic 32** UNI 171.4** Basic 32** UNI 16 UNI 120 UNI 120 UNI 120 UNI 121 UNI 171.4** Basic 20** Basic 20** Basic 25** Basic 32** RH 16 L RH 20 L RH 20 L RH 20 L RH 26 L RH 20 L RH 32 RH 16 L RH 26 L RH 26 L RH 27 L RH 28 L RH 29 L RH 20 L RH 21 L RH 22 L RH 32 L RH 32 L RH 32 L RH 20 L RH 21 L RH 22 L RH 25 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 41 L RH 45 L RH 45 L RH 32 L RH 46 L RH 47 L RH 32 L RH 47 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48 L RH 48	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:				573640 573644 573646 R 573616 573628 573632 573632 573640 573644 573646 R 573628 573150 573152 573150 573152 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156	107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9 107.9
FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	UNI 32 UNI 32 UNI 32 UNI 174 Basic 25* Basic 32* UNI 16 UNI 20 UNI 174 Basic 20* Basic 32* RH 16 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16/20 LR 16	1 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:				573644 R 573616 573628 573632 573632 573632 573644 573644 573644 573624 573624 573150 573150 573154 573156 573164 573166 573166 573156 573170 573156 573170 573156 573170 573156 573168 573170 573156 573168 573170 573156 573168 573170 573156 573168 573170 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166	107,9 107,3 119,3 119,3 107,9 107,9 107,9 107,9 107,3 119,3 119,3 107,9 215,9 107,9 118,3 107,9 118,3 107,9 118,3 107,9 118,3 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	Basic 25* Basic 25* Basic 32* UNI 16 UNI 20 UNI 125 UNI 17 UNI 25 UNI 32 UNI 32 UNI 32 UNI 32 Basic 20* Basic 32* RH 16 L RH 20 L RH 25 RH 32 RH 16 L RH 20 L RH 25 RH 32 RH 16 L RH 20 L RH 25 RH 32 RH 17 RH 32 RH 16 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 32 RH 17 RH 32 RH 17 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 32 RH 17 RH 32 RH 16 RH 20 RH 25 RH 32	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:	:			573616 573628 573632 573636 573640 573644 573644 573646 573646 573565 573150 573152 573154 573154 573154 573156 573156 573156 573156 573156 573156 573164 573156 573166 573166 573156 573156 573156 573156 573156 573166 573156 573156 573156 573156 573156 573166 573156 573166 573166 573166 573166 573166 573166 573166 573166 573166	119,3' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 118,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 11
FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	Basic 32* UNI 16 UNI 20 UNI 20 UNI 20 UNI 25 UNI 17L** Basic 20* Basic 25* Basic 32* RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	•				573628 573636 573640 573644 573646 573628 573150 573150 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573156 573166 573170 573156 573170 573156 573170 573156 573170 573156 573170 573156 573166 573170 573156 573166 573170 573156 573166 573170 573156 573166 573170 573156 573166 573160 573160 573160	119,3' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 118,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,3' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 119,9' 11
FERRO FERROPLAST GPF AXIAL PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	UNI 20 UNI 25 UNI 32 Basic 20* Basic 20* Basic 32* RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 17	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:				573636 573644 573644 573646 573628 573150 573152 573158 573154 573156 573156 573156 573156 573156 573156 573156 573156 573166 573166 573170 573156 573170 573156 573168 573170 573166 573168 573166 573160 573166 573160 573166 573166 573168 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166	107,9 107,9 107,9 107,3 119,3 119,3 119,3 107,9 215,9 107,9 215,9 107,9 118,3 107,9 118,3 107,9 118,3 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REH	UNI 25 UNI 71.4** Basic 20** Basic 25** Basic 32** RH 16 L RH 20 L RH 25 RH 16/20 L RH 25 RH 16/20 L RH 25 RH 16 L RH 20 L RH 25 RH 16 L RH 27 RH 16 L RH 27 RH 17 RH 20 RH 25 RH 16 RH 20 RH 25 RH 16 RH 20 RH 25 RH 16 RH 20 RH 25 RH 16 RH 20 RH 25 RH 17 RH 26 RH 27 RH 27 RH 28 RH 17 RH 28 RH 16 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 16 RH 20 RH 25 RH 32 RH 17	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:	:			573640 5736464 573646 R 573628 573152 573152 573155 573156 573156 573156 573156 573156 573156 573156 573156 573164 573166 573170 573156 573156 573166 573170 573156 573166 573170 573156 573168 573170 573156 573168 573168 573168 573168 573168	107,9 107,9 107,3 119,3 119,3 119,3 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
PLUMBING PLUS EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	UNI 32 UNI 32 UNI 32 UNI 71 Pasis: 20* Basic 20* Basic 32* RH 16 L RH 20 L RH 16/20 L RH 25 RH 32 RH 17 RH 20 L RH 25 RH 32 RH 16 RH 20 L RH 25 RH 32 RH 16 RH 20 L RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 16 RE 20 RH 26 RH 27 RH 30 RH 27 RH 30 RH 20 RH 41 RH 20 RH 16 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:	:		:	573644 R 573624 S 573628 573150 573152 573158 573156 573156 573156 573156 573156 573156 573156 573166 573166 573166 573170 573156 573166 573170 573156 573166 573170 573166 573166 573166 573170 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166 573166 573160 573166	107,9 119,3 119,3 119,3 119,3 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU	Basic 20* Basic 20* Basic 32* RH 16 L RH 20 L RH 16/20 L RH 25 RH 32 RH 16 L RH 20 L RH 25 RH 32 RH 16 L RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 20 RH 21 RH 21 RH 21 RH 22 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH 32 RH	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	:	:			573624 573616 573628 573150 573152 573158 573154 573156 573152 573158 573154 573164 573164 573166 573165 573166 573166 573166 573170 573156 573168 573170 573166	119,3 119,3 119,3 107,9 215,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU	Basic 25° Basic 32° RH 16 L RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16 L RH 16 L RH 16 L RH 16 L RH 16 L RH 16/20 L RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16 RH 20 L RH 25 L RH 16 L RH 25 L RH 32 L RH 17 L RH 26 L RH 27 L RH 28 L RH 28 L RH 29 L RH 29 L RH 20 L RH 25 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L RH 32 L R	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2				:	573616 573628 573150 573152 573158 573154 573156 573156 573156 573156 573164 573166 573166 573166 573166 573166 573166 573166 573170 573156 573168 573170 573156 573168	119,3' 107,9' 107,9' 215,9' 107,9' 118,3' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 107,9' 10
EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU	RH 16 L RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 25 RH 16 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16/20 L RH 16 RH 25 RH 32 RH 16 RH 25 RH 32 RH 16 RH 25 RH 32 RH 26 RH 32 RH 27 RH 28 RH 29 RH 29 RH 29 RH 29 RH 29 RH 29 RH 29 RH 29 RH 29 RH 29 RH 29 RH 29 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH 20 RH	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2	•				573150 573152 573158 573154 573156 573152 573152 573154 573156 573166 573166 573166 573166 573168 573170 573156 573168 573170 573156 573160 573160 573160 573160	107,9 107,9 107,9 107,9 107,9 107,9 107,9 118,3 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
EZIPEX Sleeve Water (AUS) PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU REHAU	RH 20 L RH 25 RH 16/20 L RH 25 RH 32 RH 16 L RH 20 L RH 25 RH 16/20 L RH 25 RH 12 RH 12 RH 12 RH 12 RH 12 RH 12 RH 12 RH 20 RH 25 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 31	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573152 573158 573154 573156 573150 573150 573158 573158 573154 573164 573166 573166 573170 573156 573170 573156 573170 573156 573170 573156 573160 573160	107,9 215,9 118,3 107,9 107,9 215,9 107,9 118,3 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
PLUMBING PLUS EZIPEX Sleeve Gas (AUS) REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S REHAU RAUTHERM S REHAU RAUTHAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 25 RH 16 L RH 20 L RH 25 RH 16 L RH 20 L RH 25 RH 12 RH 12 RH 12 RH 25 RH 12 RH 25 RH 25 RH 25 RH 26 RH 26 RH 26 RH 26 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 27 RH 2	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573154 573150 573150 573152 573158 573154 573164 573166 573164 573166 573168 573168 573168 573154 573156 573160 573160 573160	107,9; 118,33 107,9; 215,9; 107,9; 118,3; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9; 107,9;
REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 32 RH 16 L RH 16 L RH 16 (20 L RH 16 (20 L RH 16 (20 L RH 16 (20 L RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 16 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RH 36 RH 37 RH 30 RH 36 RH 37 RH 30	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573156 573150 573152 573158 573158 573156 573164 573166 573170 573156 573168 573170 573156 573168 573160 573160 573160	118,3 107,9 215,9 107,9 118,3 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9 107,9
REHAU RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 20 L RH 25 RH 16/20 L RH 25 RH 12 RH 12 RH 12 RH 12 RH 20 RH 25 RH 27 RH 27 RH 27 RH 27 RH 28 RH 27 RH 27 RH 28 RH 28 RH 27 RH 28 RH 28 RH 28 RH 29 RH 29 RH 29 RH 20 RH 25 RH 32 RH 40 RH 20 RH 25 RH 32 RH 41 RH 20 RH 25 RH 32 RH 41 RH 20	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573158 573154 573154 573166 573166 573166 573170 573156 573168 573170 573156 573160 573160 573160	107,9 107,9 215,9 107,9 118,3 107,9 107,9 107,9 118,3 107,9 107,9 107,9 118,3
REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHERM S (REHAU HAS) RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU REHAU (GBR) EVERLOC	RH 16/20 L RH 25 RH 32 RH 12 RH 12 RH 20 RH 20 RH 32 RH 17 RH 25 RH 32 RE 16 RE 25 RE 32 RE 25 RE 32 RE 40 RH 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 R	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573158 573154 573156 573164 573166 573160 573154 573156 573156 573156 573156 573156 573160 573162	215,9 107,9 118,3 107,9 107,9 107,9 118,3 107,9 107,9 118,3 107,9
REHAU RAUTHERM SOR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 25 RH 12 RH 12 RH 16 RH 20 RH 25 RH 32 RH 17 RH 25 RH 25 RH 32 RE 16 RE 20 RE 20 RE 20 RE 32 RE 40 RE 40 RE 40 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573156 573164 573166 573170 573154 573156 573168 573170 573154 573156 573160 573162	107,9 118,3 107,9 107,9 107,9 107,9 118,3 107,9 107,9 107,9 118,3
RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 12 RH 12 RH 25 RH 25 RH 32 RH 17 RH 25 RH 25 RH 32 RE 16 RE 25 RE 32 RE 20 RE 25 RE 32 RE 40 RH 16 RH 26 RH 16 RH 27 RH 16 RH 16 RH 16 RH 16 RH 16 RH 16	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573164 573166 573170 573154 573156 573168 573170 573154 573156 573160 573160 573162	107,9 107,9 107,9 107,9 118,3 107,9 107,9 118,3 107,9
RAUTHERM SDR 11 LX REHAU RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 16 RH 20 RH 25 RH 35 RH 37 RH 20 RH 20 RH 25 RE 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 25	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2					573166 573170 573154 573156 573168 573170 573154 573156 573160 573160 573162	107,9 107,9 107,9 118,3 107,9 107,9 107,9 118,3
REHAU REHAU RAUTHERM S (REHAU HAS) REHAU RAUTHS REHAU RAUTINA RAUTINA PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 20 RH 25 RH 32 RH 17 RH 20 RH 25 RH 32 RE 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 20	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			:		573170 573154 573156 573168 573170 573154 573156 573160 573162	107,9 107,9 118,3 107,9 107,9 107,9 118,3
RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 32 RH 17 RH 20 RH 25 RH 32 RE 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 20 RH 20 RH 25	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			:		573156 573168 573170 573154 573156 573160 573162	118,3 107,9 107,9 107,9 118,3 107,9
RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 17 RH 20 RH 25 RH 32 RE 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 16 RH 20 RH 25	2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2 2			:		573168 573170 573154 573156 573160 573162	107,9 107,9 107,9 118,3 107,9
RAUTHERM S (REHAU HAS) REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 20 RH 25 RH 32 RE 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 20 RH 20 RH 25	2 2 2 2 2 2 2 2 2 2 2 2			:		573170 573154 573156 573160 573162	107,9 107,9 118,3 107,9
REHAU RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RH 32 RE 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 20 RH 25	2 2 2 2 2 2 2 2			:		573156 573160 573162	118,3 107,9
RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RE 16 RE 20 RE 25 RE 32 RE 40 RH 16 RH 20 RH 25	2 2 2 2 2 2			:		573160 573162	107,9
RAUTITAN PX/MX/SX/RX/ gas/sprinkler REHAU (GBR) EVERLOC	RE 20 RE 25 RE 32 RE 40 RH 16 RH 20 RH 25	2 2 2 2 2			•		573162	
gas/sprinkler REHAU (GBR) EVERLOC	RE 40 RH 16 RH 20 RH 25	2 2						
REHAU (GBR) EVERLOC	RE 40 RH 16 RH 20 RH 25	2 2			:		573172 573178	107,9
EVERLOC	RH 16 RH 20 RH 25	2					573176	107,9 128,7
	RH 25	2			•		573166	107,9
REVEL-PEX		2					573170 573154	107,9 107,9
REVEL-PEX	RH 32	2 2			:		573154	118,3
	RV 16	2	•	•	•		573400	107,9
	RV 20 RV 25	2 2	:	:	:		573402 573404	107,9! 107,9!
	RV 32	2	Ľ	_			573406	118,3
REVI REVIUNI	TC 12/14/16	2		•			573360	107,9
	TC 18/20 TC 25 TC 32	2 2		:			573364 573367	107,9 107,9
	TC 32	2		•			573370	118,3
REVI REVITERM	TC 12/14/16	2		•			573360	107,9
Riquier à glissement	UNI 12 UNI 16	2 2		:			573630 573632	107,9! 107,9!
gussement	UNI 20	2 2		•			573636	107,9
	UNI 25 UNI 32	2 2		:			573640 573644	107,9 107,9
	UNI T/L**	1	.	•			573646 R	107,3
C 16 : 1 CD	Basic 25*	2	٠	•			573616	119,3
Seppelfricke SD Sistemi Italia	RE 16 RF 20	2					573160 573162	107,9! 107,9!
Sylver	RE 20 RE 25	2			•		573162 573172	107,9
	RE 32 RO 16	2 2					573178 573184	107,9 107,9
	RO 20	2			:		573186	107,7
Seppelfricke SD	RE 16				•		573160	107,9
Sistemi Italia Neroflex	RE 20 RE 25	2 2 2 2			:		573162 573172	107,9 107.9
iveronex	RE 32	2					573178	107,9
	RO 16	2			:		573184	107,9
TECE TECEflex	RO 20 TC 12/14/16	2			÷		573186 573360	107,9
. LOL I LOLITEA	TC 18/20 TC 25	2	:	:			573364	107,9
	TC 25 TC 32	2 2		:	:		573367	107,9
TIEMME		2		÷	÷		573370 573160	118,3 107,9
Assialpex	RE 16 RE 20	2		•	•		573162	107,9
	RE 25	2 2		:	:		573172 573178	107,9
Tradelink	RE 32 RH 16 L	2		-	÷		573176	107,9 107,9
TradePex Sleeve	RH 20 L	2 2			•		573152	107,9
Water	RH 16/20 L RH 25	2 2					573158 573154	215,9 107,9
	RH 25 RH 32	2			•		573154 573156	118,3
Tradelink	RH 16 L	2			•		573150	107,9 107,9 215,9
TradePex Sleeve Gas	RH 20 L RH 16/20 L	2			:		573152 573158	215.9
	RH 25	2 2 2 2			•		573154	107,9
Velta	RH 32	2			٠		573156	118,3
vetta Eurojauge	UNI 12 UNI 16		:	:			573630 573632	107,9 107,9
.,	UNI 20	2 2	•	•		•	573636	107,9
	UNI 25 UNI T/L**	2 1	.	:		:	573640 573646 R	107,95 107,33
	Basic 25*	2		·			573616	119,37
Würth PRINETO	IV 16/17	3			•		573320	161,93
	IV 20/21 IV 25/26	3 3					573325 573330	161,93 161,93

Pressure sleeve systems for gas installations may only be pressed with the yellow-highlighted pressing heads in the table.

Observe the national regulations.

Compression heads for additional compression sleeve systems on request.

 $^{1)}$ For producing compression sleeve connection of Ø 12–22 mm.

Compression heads with spring lock Compression head Basic 20

Compression head Basic 25


for pipe fittings 20 mm and for standard press inserts outer Ø 20 mm for pipe fittings 25 mm and for standard press inserts outer Ø 25 mm for pipe fittings 32 mm and for standard press inserts outer \emptyset 32 mm

Compression head Basic 32

** Compression head for T-pieces, elbows, splitters, transition pieces

Compression head UNI T/L

for T-pieces, elbows, splitters, in combination with an additional compression head; for transition pieces, in combination with a support bolt, see page 248.

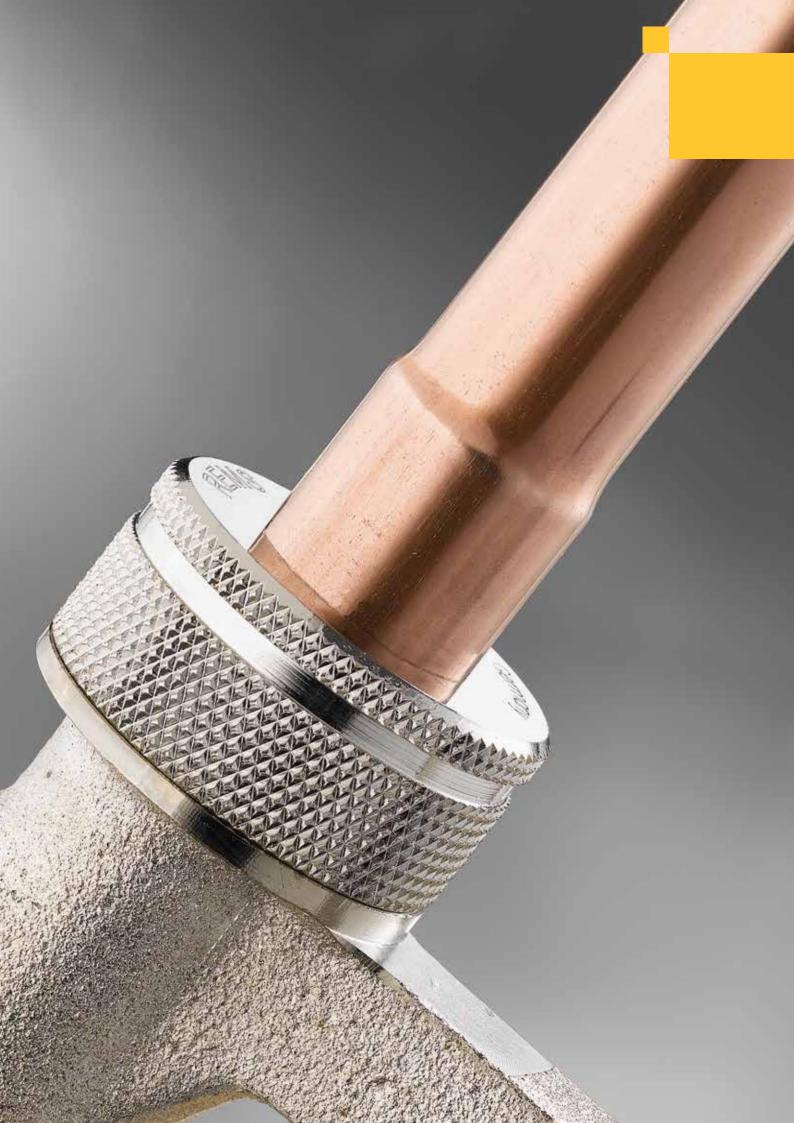

Expanding Extracting

	Hand tube expander Cu	252
Co	Expander head Cu	252
A P	One-hand pipe expander	253
	Hand tube expander P	253
	Cordless pipe expander Cu	254
	Cordless pipe expander P	254
7	Cordless pipe expander P-CEF	254
7	Electro-hydraulic pipe expander P-CEF	256
	Expander head P Expander head P-CEF	257
	Hand tube extractor	258
	Electric tube extractor Electric tube expander	259

Proven quality tool for expanding and calibrating pipes for pipe installation without fittings.

Soft copper tubes s ≤ 1.5 mm	Ø 8 – 42 mm Ø 3⁄8 – 11⁄8 "			
Soft aluminium tubes, soft precision steel tubes $s \le 1.2 \text{ mm}$	Ø 8 – 42 mm Ø 3% – 11/8"			
Soft stainless steel tubes s ≤ 1 mm	Ø 8 – 42 mm Ø 3⁄8 – 11⁄8 "			

REMS Ex-Press Cu – for making sockets yourself. 6-face mandrel for even and concentric expanding. Extra long sockets according to DVGW. Expander heads with calibration neck, fit other makes as well.

Cost advantage


Pipe installation without fittings. No costs for fittings, storage, procurement. Savings in soldering joints, soldering material and working hours. Using up pipe pieces to provide sockets.

Design

Robust quality tool. Torsion-free, power-transmitting expander levers with ergonomically designed handles, for effortless expanding. 6-face mandrel for even and concentric expanding. Extra long sockets, spring-loaded return of mandrel release. Also for other suitable makes of expander heads.

Expander heads

Quick-change. Extra long expander heads result in extra long sockets for perfect pipe connections according to DVGW. Special neck at expander head specially for calibration of deformed pipe ends.

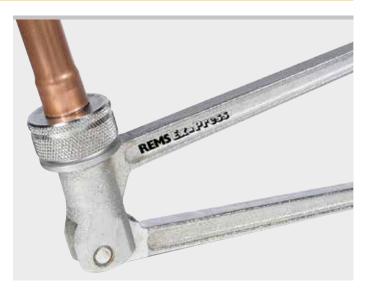

German Quality Product



Supply format

REMS Ex-Press Cu Set. Hand tube expander \emptyset 8 – 42 mm, \emptyset % – 1½". Soft copper tubes \emptyset 8 – 42 mm, \emptyset % – 1½", s \leq 1.5 mm, soft aluminium tubes and soft steel precision tubes \emptyset 8 – 42 mm, \emptyset % – 1½", s \leq 1.2 mm, soft stainless steel tubes \emptyset 8 – 42 mm, \emptyset % – 1½", s \leq 1 mm. Expander drive. Choice of expander heads for pipes in mm or inch. In sturdy steel case.

Description	ArtNo.	€
Set 12+15+18+22	150000 R	467,10
Set 12+15+22+28	150005R	482,67
Set 15+18+22+28	150006R	482,67
Set 12+15+18+22+28	150007 R	544,95
Set 12+14+16+18+22+28+32	150008R	679,89
Set 12+14+16+18+22	150010R	539,76
Set 3/8 + 1/2 + 5/8 + 3/4 + 7/8 + 11/8"	150017R	643,56
Set ½ + 5/8 + 7/8 + 11/8"	150018R	508,62
Set 3/8 + 1/2 + 5/8 + 7/8"	150019R	487,86
Set 3% + 1/2 + 5/8 + 3/4 + 7/8 + 1"	150020R	643,56



Accessories

Description	Pipes Ø mm/inch	ArtNo.	€
Expander head Cu	8	150100R	64,67
(fit expander drives	10	150105R	64,67
of REMS Ex-Press Cu 22V	12	150110R	64,67
ACC and other	14	150120R	64,67
makes also)	15	150125R	64,67
,	16	150130R	64,67
	18	150140R	64,67
	20	150145R	90,51
	22	150150R	64,67
	24	150155R	103,38
	25	150160R	90,51
	26	150165R	77,54
	28	150170R	77,54
	30	150175R	103,38
	32	150180R	77,54
	34	150185R	103,38
	35	150190R	103,38
	36	150195R	103,38
	40	150205R	103,38
	42	150210R	90,51
	2/ 11	4500000	
	3/8"	150220R	64,67
	1/2"	150225R	64,67
	5/8"	150230R	64,67
	3/4"	150235R	77,54
	7/8"	150240R	77,54
	1"	150245R	90,51
	11/8"	150250R	90,51
Expander drive Cu (taper angle 18°)		150500R	180,61
Steel case with insert		150600R	55.01







Robust, compact quality tool for expanding tubes. For one-hand operation.

PEX tubes Serie S 5 according to ISO 4065

Ø 12-40 mm

REMS Ex-Press H - universal up to Ø 40 mm.

Robust, compact quality tool. Super light, only 0.7 kg.


Stepped mandrels for expanding several tube dimensions, no tool change required.

Torsion-free, leveraged expander tool for effortless expanding. For one-hand operation.

Supply format

REMS Ex-Press H. One-hand pipe expander for PEX tubes Serie S 5 according to ISO $4065 \ \emptyset \ 12-40 \ mm.$ In a carton.

ArtNo.	€
150550R	196,18

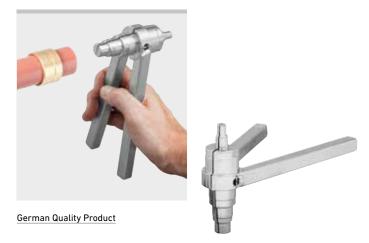

REMS Ex-Press P

Proven quality tool for expanding tubes.

Plastic tubes, multi-layer composite tubes ∅ 12 – 32 mm

REMS Ex-Press P – for expanding tubes. Conical mandrel for even and concentric expanding.

Design

Robust quality tool. Torsion-free, power-transmitting expander levers with ergonomically designed handles, for effortless expanding. Conical mandrel (taper angle 18°) for even and concentric expanding. Long mandrel guidance, spring-loaded mandrel release. Also for other suitable makes of expander heads.

Expander heads for all common systems

Complete assortment of REMS expander heads P for all common compression sleeve systems (page 257). Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding

Supply format

REMS Ex-Press P Set. Hand tube expander for plastic tubes and multi-layer composite tubes Ø 12 – 32 mm. REMS Ex-Press P. Expander heads P for tubes in mm. In sturdy steel case.

in mm. In sturdy steel case.			
Description	Compr. sleeve system	ArtNo.	€
Set AT P 16 + 20 + 25	aquatherm SHT PB/PE-Rohre	150021 R	591,66
Set AT V 16 + 20 + 25	aquatherm SHT Mehrschicht-Metall-		
Set IV 16/17+20/21+25/26	verbundrohre IVT PRINETO, Würth	150033R	591,66
	PRINETO	150026R	591,66
Set RH HAS 17+20+25 Set RH HIS 16+20+25	REHAU RAUTHERM S (REHAU HAS), General Fittings Serie 3400 PEX Gold-Therm REHAU RAUTITAN flex/ gas flex/pink/his, General	150027R	591,66
Set RH MKV 16 + 20 + 25	Fittings Serie 3400 PEX, REVEL, Seppelfricke SD Sistemi Italia Neroflex, TIEMME Assialpex REHAU RAUTITAN stabil/ gas stabil, General Fittings Serie 3400 PEX/AL/PEX,	150028R	591,66
Set RH 16 + 20 + 25	Seppelfricke SD Sistemi Italia Sylver REHAU RAUTHERM (série	150022R	591,66
	S 5), REHAU (GBR) EVERLOC	150029R	591,66
Set TC 16+18/20+25	TECE TECEflex	150025R	591,66

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads, see table page 257.

Hand tube expander



German Quality Product



e.g.
aquatherm,
General Fittings,
IVT,
REHAU,
REVEL,
Seppelfricke,
TECE,
TIEMME,
Würth



Accessories

Description	ArtNo.	€
Expander heads P see page 257.		
Expander drive REMS Ex-Press P (taper angle 18°)	150510R	204,49
Steel case with insert	150600R	55,01



Compact, handy power tool with automatic return for fast, easy expansion of pipes/rings. Li-lon 22V Technology. For cordless and mains operation. For trade and industry. For the building site and the workshop.

Expander Cu

for holding the REMS Cu expander heads and suitable expander heads of other makes for:

Soft copper pipes, $s \le 1.5 \,\text{mm}$ Ø 8-42 mm

Ø 3/8 - 13/4"

Soft aluminium pipes,

soft precision steel pipes, $s \le 1.2 \,\text{mm}$ $\emptyset \, 8-42 \,\text{mm}$

Ø 3/8 – 13/4"

Soft stainless steel pipes, $s \le 1 \text{ mm}$ Ø 8–42 mm

Ø 3/8 – 13/4"

Expander P

for holding the REMS P expander heads and suitable expander heads of other makes for:

Plastic tubes, composite tubes Ø 12 – 40 mm

Expander P-CEF

for holding the REMS P-CEF expander heads and suitable expander heads of other makes for: Cold Expansion Fittings made of plastic (P-CEF)

> $\emptyset 16 - 40 \text{ mm}$ $\emptyset \frac{1}{2} - \frac{1}{2}$ " $s \le 4.95 \text{ mm}$

REMS Ex-Press 22V ACC – fast, easy electric expanding up to Ø 42 mm. With automatic return. Conical expanding mandrel for even centric expanding. E.g. REMS Ex-Press Cu 22V ACC with Li-lon 21.6 V, 2.5 Ah battery for approx. 600 expansions of soft copper pipe 15 × 1 mm with one battery charge*.

System advantage

Only **one** drive unit, optionally with **expander Cu** for holding the REMS Cu expander heads and suitable expander heads of other makes, **expander P** for holding the REMS P expander heads and suitable expander heads of other makes, **expander P-CEF** for holding the REMS P-CEF expander heads and suitable expander heads of other makes.

Expander heads for all common systems

Quick-change, without tools. Also for other suitable makes of expander tongs. **REMS expander heads Cu** (page 252) with extra long segments provide an extra long muff for a perfect pipe joint in accordance with DVGW. Collar on the expander head for calibrating unround pipe ends.

REMS expander heads P (page 257) are system-specific and correspond to the requirements of the respective compression sleeve systems. Therefore, perfectly system-conformant, exact expanding.

REMS expander heads P-CEF (page 257) are system-specific and correspond to the requirements of the respective systems. Automatic, gradual expansion until reaching the given end position which is determined by the expander head.

Design

Ultra light, ultra small, ultra handy. Drive unit with battery pack weighs only 2.7 kg. Drive unit with expander only 26 cm long. Can therefore be used anywhere, free hand, over head, also in very confined spaces. Optimum weight distribution for one-hand operation. Ergonomically designed housing. LED work light for illuminating the work place. Expanding mandrel of the Cu and P expanders with conical angle 18°, expanding mandrel of the P-CEF expander with conical angle 20°, or even centric expanding. Long mandrel guide, spring-loaded mandrel recoil. Also for other suitable makes of expander heads.

Drive

High expanding force for perfect, split-second expanding. Thrust force 20 kN. Powerful electro-hydraulic drive with automatic return (ACC), with powerful battery motor 21.6 V, 380 W output, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety switch.







German Quality Product





Battery or mains operation

Li-lon 22V Technology. Highly resistant Li-lon 21.6V battery with 2.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful.

REMS Ex-Press Cu 22V ACC with Li-lon 21.6 V, 2.5 Ah battery for approx. 600 expansions, 4.4 Ah for approx. 1050 expansions, 5.0 Ah for approx. 1200 expansions, 9.0 Ah for approx. 2160 expansions of soft copper pipe 15 × 1 mm with one battery charge.

REMS Ex-Press P 22V ACC with Li-lon 21.6 V, 2.5 Ah battery for approx. 750 expansions, 4.4 Ah for approx. 1320 expansions, 5.0 Ah for approx. 1500 expansions, 9.0 Ah for approx. 2700 expansions of REHAU RAUTITAN flex \emptyset 16 × 2.2 mm with one battery charge*.

REMS Ex-Press P-CEF 22V ACC with Li-lon 21.6 V, 2.5 Ah battery for approx. 200 expansions, 4.4 Ah for approx. 360 expansions, 5.0 Ah for approx. 410 expansions, 9.0 Ah for approx. 740 expansions of Uponor Quick & Easy \emptyset 16 × 1.8 with one battery charge*.

Graduated charging status check by coloured LEDs. Operating temperature range -10 to + 60 °C. No memory effect for maximum battery power. Rapid charger $100-240\,V,\,90\,W.$ Rapid charger $100-240\,V,\,290\,W,$ for shorter charging times, as accessory. Voltage supply $220-240\,V/21.6\,V,\,15\,A$ output, for mains operation instead of Li-lon xbattery $21.6\,V,\,as$ accessory.

Supply format

REMS Ex-Press Cu 22V ACC Basic-Pack. Cordless pipe expander 20 kN for fast expanding of copper pipes Ø 8-42 mm. Electro-hydraulic drive with automatic return, with powerful 21.6V, 380W battery motor, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety switch. LED work light. Li-lon 21.6V, 2.5 Ah battery, 220-240V, 50-60 Hz, 70W rapid charger. Cu expander for holding the REMS Cu expander heads and suitable expander heads of other makes. Without expander heads. In sturdy steel case.

Art	No. €
575020	R220 1.505,10

Other voltages on request.



Supply format

REMS Ex-Press P 22V ACC Basic-Pack. Cordless pipe expander 20 kN for fast expanding of plastic and composite tubes Ø 12-40 mm. Electro-hydraulic drive with automatic return, with powerful 21.6V, 380 W battery motor, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety switch. LED work light. Li-lon 21.6V, 2.5 Ah battery, 220-240V, 50-60 Hz, 70 W rapid charger. P expander for holding the REMS P expander heads and suitable expander heads of other makes. Without expander heads. In sturdy steel case.

ArtNo.	€
575021 R220	1.505,10

Other voltages on request.



e.g.
aquatherm,
General Fittings,
IVT,
REHAU,
REVEL,
Seppelfricke,
TECE,
TIEMME,
Würth

Supply format

REMS Ex-Press P-CEF 22V ACC Basic-Pack. Cordless pipe expander 20 kN for fast expanding of plastic tubes \emptyset 16–40 mm. Electro-hydraulic drive with automatic return, with powerful 21.6V, 380 W battery motor, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system, safety switch. LED work light. Li-Ion 21.6V, 2.5 Ah battery, 220–240V, 50–60 Hz, 70 W rapid charger. P-CEF expander for holding the REMS P-CEF expander heads and suitable expander heads of other makes. Without expander heads. In sturdy steel case.

		Art.	No.	€
		57502	22R220	1.505,10

Other voltages on request.



e.g. Brass & Fittings, Uponor

Accessories

Description	ArtNo.	€
REMS Ex-Press 22 V ACC drive unit, without expander, without battery	575010R22	1.079,52
Expander Cu for holding the REMS Cu expander heads and suitable expander heads of other makes for: Conical angle 18°.	575252R	77,23
Expander heads Cu see page 252		
Expander P for holding the REMS P expander heads and suitable expander heads of other makes for: Conical angle 18°.	575253R	77.23
Expander heads P see page 257.	373233K	77,23
Expander P-CEF for holding the REMS P-CEF expander heads and suitable expander heads of other		
makes for: Conical angle 20°.	575256R	77,23
Expander heads P-CEF see page 257.		
Expander tongs P-CEF (conical angle 20°), for accommodating the expander heads P-CEF $16-40$ mm, $\frac{1}{2}-1\frac{1}{2}$ "	150515R	204,49
Battery Li-lon 21.6 V, 2.5 Ah	571571 R22	258,46
Battery Li-lon 21.6 V, 4.4 Ah	571574R22	372,64
Battery Li-lon 21.6 V, 5.0 Ah	571581 R22	310,36
Battery Li-lon 21.6 V, 9.0 Ah	571583R22	414,16
Rapid charger 100 – 240 V, 50 – 60 Hz, 90 W	571585 R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W	571587 R220	414,16
Voltage supply 220 – 240 V/21.6 V, 50 – 60 Hz, 15 A,	ĺ	
for mains operation instead of battery Li-Ion 21.6 V.	571567 R220	414,16
Steel case with insert	578290R	110,03
REMS Lumen 2800 22V, cordless LED flood light, see page	ge 111	



REMS Power-Ex-Press P-CEF ACC

Compact, handy power tool for fast, easy expanding of pipes/rings. For trade and industry. For the building site and the workshop.

Cold Expansion Fittings made of plastic (P-CEF)

Ø 16-63 mm Ø $\frac{1}{2}$ -2" s ≤ 6.3 mm

REMS Power-Ex-Press P-CEF ACC – Fast, easy electric expanding up to Ø 63 mm. With automatic return. For Uponor Quick & Easy and Giacomini GX System.

Expander heads

Large expanding capacity up to Ø 63 mm. Automatic, gradual expansion until reaching the given end position which is determined by the expander head. Use of the REMS P-CEF expander heads and suitable expander heads of other makes for: Expander $50-63\,\text{mm},\,2^\circ$, for holding the REMS P-CEF expander heads $50-63\,\text{mm},\,2^\circ$ and suitable expander heads of other makes. Expander $16-40\,\text{mm},\,\frac{1}{2}-1\frac{1}{2}^\circ$, for holding the REMS P-CEF expander heads $16-40\,\text{mm},\,\frac{1}{2}-1\frac{1}{2}^\circ$ and suitable expander heads of other makes, as an accessory.

Execution

Compact, robust, job site-proven. Small in size, slender design, drive unit only 5.6 kg. Works anywhere, free-hand, overhead, in confined areas. Ideal weight distribution for single handed operation. Ergonomically designed housing with recessed grip.

Drive

High pressing force for fast, perfect expanding. Thrust force 34 kN. Powerful electro-mechanical drive with automatic return (ACC), with proven universal motor, 450 W, maintenance-free gear with safety slipping clutch and in-feed system with machine screw spindle. Safety tip switch.



German Quality Product



Supply format

REMS Power-Ex-Press P-CEF ACC Basic-Pack. Electro-hydraulic pipe expander $34 \, \text{kN}$ for expanding tubes/coils of the Uponor Quick & Easy system Ø $16-63 \, \text{mm}$, Ø $\frac{1}{2}-2^{\circ}$, s $\leq 6.3 \, \text{mm}$. Electro-hydraulic drive with automatic retraction, ith proven universal motor 230 V or $110 \, \text{V}$, $50-60 \, \text{Hz}$, $450 \, \text{W}$, robust planetary gear, eccentric reciprocating pump and compact high power hydraulic system. Safety tip switch.

xpanding device 30 – 63 mm, Z., without expander neads	s. III Sturdy	Steet Case.
	ArtNo.	€
	575017R220	1.462,54

Note assembly instructions of system supplier. Battery tube expander for other systems on request. Other voltages on request.



Description	ArtNo.	€
Expander 16 – 40 mm, $\frac{1}{2}$ – $\frac{1}{2}$" , for holding the P-CEF expander heads $16 - 40$ mm, $\frac{1}{2}$ – $\frac{1}{2}$ "	575100R	122,48
Expander heads P-CEF see page 257.		
Steel case with insert	575278R	110,03







REMS expander heads P

Complete assortment of REMS expander heads P for all common compression sleeve systems. Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding. Conical angle 18°. Driven by REMS Ex-Press P hand pipe expander (page 253), REMS Ex-Press P 22V ACC cordless pipe expander (page 254 – 255) and by suitable pipe expanders of other makes.

REMS Ex-Press P 22 V ACC co suitable pipe expanders of ot		234-233)	ana by
Compression sleeve system	Expander head P Ø × s	ArtNo.	+
aquatherm grey pipe	AT P 14 × 2,0	150828	120,4
PB/PE-RT-Rohre	AT P 16 × 2,0	150842	120,4
	AT P 18× 2,0 AT P 20× 2,0	150873 150882	120,4 120,4
	AT P 25 × 2,3	150002	120,4
aguatherm grey pipe	AT V 16× 2.4	150843	120,4
Mehrschicht-	AT V 10× 2,4 AT V 20× 2,4	150843	120,4
Metallverbundrohre	AT V 25 × 2,7	150913	120,4
(MVR)	AT V 32 × 3,2	150957	129,7
,	AT V 40 × 3,5	150958	142,2
General Fittings	RH HIS 16 × 2,2	150849	120,4
Serie 3400 PEX Gold-Fix	RH HIS 20 × 2,8	150888	120,4
	RH HIS 25 × 3,5	150916	120,4
	RH HIS 32 × 4,4	150945	120,4
General Fittings	RH MKV 16,2 × 2,6	150858	120,4
Serie 3400 PEX/AL/PEX	RH MKV 20 × 2,9	150897	120,4
Gold-Fix	RH MKV 25 × 3,7	150926	120,4
	RH MKV 32 × 4,7	150952	120,4
General Fittings	RH HAS 17 × 2,0	150868	120,4
Serie 3400 PEX	RH HAS 20 × 2,0	150887	120,4
Gold-Therm			
HERZ QUICK FIX	HC P 16 × 2,0	150806	120,4
	HC P 20 × 2,0	150807	120,4
	HC P 26 × 3,0	150808	120,4
N/T DDINETO	HC P 32 × 3,0	150809	120,4
IVT PRINETO	IV 16 × 2,2/17 × 2,8	150845	120,4
	IV 20 × 2,8/21 × 3,4	150885	120,4
	IV 25 × 3,5/26 × 4,0 IV 32 × 4,4/33 × 4,9	150914 150943	120,4 129,7
REHAU RAUTHERM	RH 12 × 1,1	150812	120,4
(série S 5)	RH 16 × 1,5	150846	120,4
(Serie 5 5)	RH 20 × 1,9	150886	120,4
	RH 25 × 2,3 (RH HAS 25 × 2,3)	150915	120,4
	RH 32 × 2,9 (RH HAS 32 × 2,9)	150944	120,4
REHAU RAUTHERM S	RH HAS 17 × 2,0	150868	120,4
(REHAU HAS)	RH HAS 20 × 2,0	150887	120,4
	RH HAS 25 × 2,3	150915	120,4
	RH HAS 32 × 2,9	150944	120,4
REHAU RAUTITAN flex/	RH HIS 16 × 2,2	150849	120,4
RAUTITAN gas flex/	RH HIS 20 × 2,8	150888	120,4
RAUTITAN bink/	RH HIS 25 × 3,5	150916	120,4
RAUTITAN his	RH HIS 32 × 4,4 RH HIS 40 × 5,5	150945 150946	120,4 129,7
REHAU RAUTITAN stabil/	RH MKV 16,2 × 2,6	150740	127,7
RAUTITAN gas stabil	RH MKV 10,2 × 2,0 RH MKV 20 × 2.9	150897	120,4
KAOTITAN gas stabit	RH MKV 25 × 3,7	150926	120,4
	RH MKV 32 × 4,7	150952	120,4
	RH MKV 40 × 6,0	150947	129,7
REHAU (GBR) EVERLOC	RH 16 × 1,5	150846	120.4
	RH 20 × 1,9	150886	120,4
	RH 25 × 2,3 (RH HAS 25 × 2,3)	150915	120,4
	RH 32 × 2,9 (RH HAS 32 × 2,9)	150944	120,4
REVEL	RH HIS 16 × 2,2	150849	120,4
	RH HIS 20 × 2,8	150888	120,4
	RH HIS 25 × 3,5	150916	120,4
	RH HIS 32 × 4,4	150945	120,4
Seppelfricke SD	RH HIS 16 × 2,2	150849	120,4
Sistemi Italia	RH HIS 20 × 2,8	150888	120,4
Neroflex	RH HIS 25 × 3,5	150916	120,4
	RH HIS 32 × 4,4	150945	120,4
	RH MKV 16,2 × 2,6	150858	120,4
	RH MKV 20 × 2,9	150897	120,4
Sistemi Italia		150007	120,4
Sistemi Italia	RH MKV 25 × 3,7	150926 150952	
Sistemi Italia Sylver	RH MKV 25 × 3,7 RH MKV 32 × 4,7	150952	120,4
Sistemi Italia Sylver	RH MKV 25 × 3,7 RH MKV 32 × 4,7 TC 12/14	150952 150826	120,4 120,4
Sistemi Italia Sylver	RH MKV 25 × 3,7 RH MKV 32 × 4,7 TC 12/14 TC 16	150952 150826 150855	120,4 120,4 120,4
Sistemi Italia Sylver	RH MKV 25 × 3,7 RH MKV 32 × 4,7 TC 12/14 TC 16 TC 18/20	150952 150826 150855 150894	120,4 120,4 120,4 120,4
Sistemi Italia Sylver	RH MKV 25 × 3,7 RH MKV 32 × 4,7 TC 12/14 TC 16 TC 18/20 TC 25	150952 150826 150855 150894 150923	120,4 120,4 120,4 120,4 120,4
Sistemi Italia Sylver TECE TECEflex	RH MKV 25 × 3,7 RH MKV 32 × 4,7 TC 12/14 TC 16 TC 18/20 TC 25 TC 32	150952 150826 150855 150894 150923 150950	120,4 120,4 120,4 120,4 120,4
Seppelfricke SD Sistemi Italia Sylver TECE TECEflex TIEMME Assialpex	RH MKV 25 × 3,7 RH MKV 32 × 4,7 TC 12/14 TC 16 TC 18/20 TC 25 TC 32 RH HIS 16 × 2,2	150952 150826 150855 150894 150923 150950	120,4 120,4 120,4 120,4 120,4 120,4
Sistemi Italia Sylver TECE TECEflex	RH MKV 25 × 3,7 RH MKV 32 × 4,7 TC 12/14 TC 16 TC 18/20 TC 25 TC 32	150952 150826 150855 150894 150923 150950	120,4 120,4 120,4 120,4 120,4 120,4 120,4 120,4

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads. REMS expander heads P for additional compression sleeve systems on request.

Choose expander heads yourself!

Search for the required compression sleeve system in the table below and select the correct expander heads.









German Quality Product

REMS expander heads P

Complete assortment of REMS expander heads P for all common compression sleeve systems. Quickly interchangeable, without tools. The REMS expander heads are system-specific and comply with the requirements of the respective compression sleeve system. Thus perfect system-conformity, exact expanding. Conical angle 18°. Driven by REMS Ex-Press P hand pipe expander (page 253), REMS Ex-Press P 22V ACC cordless pipe expander (page 254–255) and by suitable pipe expanders of other makes.

Compression sleeve system	Expander head P $\emptyset \times s$	ArtNo.	€
Würth PRINETO	IV 16 × 2,2/17 × 2,8	150845	120,41
	IV 20 × 2,8/21 × 3,4	150885	120,41
	IV 25 × 3,5/26 × 4,0	150914	120,41
	IV 32 × 4,4/33 × 4,9	150943	129,75

System-specific and/or national differences of the wall thickness (s) of tubes need to be considered selecting expander heads. REMS expander heads P for additional compression sleeve systems on request.









REMS expander heads P-CEF

Full range of REMS P-CEF expander heads for easy expanding of pipes/rings. Quick-change, without tools. The REMS P-CEF expander heads are systemspecific and correspond to the requirements of the respective systems. Therefore, perfectly system-conformant, exact expanding. Conical angle 20°. Driven by REMS Ex-Press P-CEF 22V ACC cordless pipe expander (page 254–255), REMS Power-Ex-Press P-CEF ACC electro-hydraulic pipe expander (page 256) and by suitable pipe expanders of other makes.

Compression sleeve system	Expander head P-CEF Ø × s	ArtNo.	€
Uponor Quick & Easy	P-CEF 16 × 1.8	150960R	129,75
	P-CEF 20× 1.9	150961 R	129,75
	P-CEF 25 × 2.3	150962R	129,75
	P-CEF 32 × 2.9	150963R	129,75
	P-CEF 40 × 3.7	150968R	142,21
Expander drive P-CEF (taper	angle 20°), for holding		
the P-CEF expander heads 16	5 – 40 mm, ½ – 1½"	150515R	204,49

System-related and/or national differences of the wall thickness s of the pipes must be considered in the selection of the expander heads.

Economic manual tool for efficiently making T-branches for pipe installations without fittings.

Hard and soft copper tubes

Ø 10 – 22 mm Ø 3/8 – 7/8 "

s ≤ 1.5 mm

REMS Hurrican H – for making T-branches yourself. Inexpensive. Also on tubes already installed.

System advantage

Only one type of extractor tools for REMS Hurrican H, REMS Hurrican and REMS Twist/Hurrican. Simple, inexpensive storage. No confusion possible.

Cost advantage

No costs for T-pieces, storage, procurement. Savings in soldering joints, pressing joints and working hours. Higher safety by fewer tube joints.

Design

Compact, handy, light. Can be used anywhere, free-hand, on pipes already installed. Drill head for exact drilling start without centre punching, drilling depth stop according to size of the T-outlet. Limitation of insertion depth to avoid obstruction by using the dimpling pliers. Handy gripping tongs for fixing the tool holder on the pipe, as an accessory.

Drill head drive

Drive with conventional electric drill.

Extractor tools

Special design of extractor tools facilitate even and smooth material deformation without burrs and notches. Therefore no secondary treatment required.

Tool holder drive

With standard ratchet and hexagon socket 11 mm or with spanner. Upgrade to electric pipe neck expander by buying the REMS Twist/Hurrican drive machine.



German Quality Product





Supply format

REMS Hurrican H Set. Hand tube extractor for hard and soft copper tubes \emptyset 10-22 mm, \emptyset %-%, $s \le 1.5$ mm. Tool holder, drill head, dimpling pliers, lubricant. Extractor tools for tubes in mm or inch. In sturdy case.

Description	ArtNo.	€
Set 12+15+18+22	151003R	550,14
Set 12+14+16+18+22	151004R	612,42
Set 3/8 + 1/2 + 5/8 + 3/4 + 7/8"	151005R	633,18

Accessories

Description	Tubes Ø mm/inch	ArtNo.	€
Extractor tool	10	151105R	67,89
	12	151110R	67,89
	14	151120R	67,89
	15	151125R	67,89
	16	151130R	67,89
	18	151140R	67,89
	20	151145R	67,89
	22	151150R	67,89
	3/8"	151155R	72,04
	1/2"	151160R	69,96
	5/8"	151165R	69,96
	3/4"	151170R	69,96
	7/8"	151175R	69,96
REMS Twist/Hurrican o	Irive unit		
with stabiliser		151402R220	371,60
Grip wrench for clampi	ng the tool holder	076117	109,92
Tool holder		151200R	85,32
Drill head		151210RMM	127,67
Dimpling pliers		151230R	40,48
Ratchet ½"		074021	76,71
Hexagon socket 11 mm		074041	7,79
Lubricant (tin)		151240	9,34
Case with inlay		151618R	53,98



Powerful, compact electric tool for efficient machining of T-branches of hard and soft tubes for tube installations without fittings.

Hard and soft copper tubes

Ø 10 – 22 mm Ø 3/8 – 7/8"

 $s \le 1.5 \text{ mm}$

REMS Hurrican – for making T-branches yourself. Inexpensive. Also on tubes already installed.

System advantage

Only **one** type of extractor tools for REMS Hurrican H, REMS Hurrican and REMS Twist/Hurrican. Simple, inexpensive storage. No confusion possible.

Cost advantage

No costs for T-branches, storage, procurement. Savings in soldering joints, soldering material and working hours. Higher safety by fewer tube joints.

Design

Compact, handy, light. Can be used anywhere, free-hand, on pipes already installed. Drill head provides precise drilling without punching with any standard power drill. Drill depth-stop according to the size of T-branch. Tool holder for holding the extractor tools. Limitation of insertion depth to avoid obstruction by using the dimpling pliers. Handy grip wrench for clamping the tool holder onto the pipe.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Handly, light, only 1.5 kg. Can be used anywhere, free-hand, also on pipes already installed. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 630 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed can be continuously controlled electronically by variable pressure on the safety switch from 0 to 1,000 rpm (accelerator switch).

Extractor tools

Special design of extractor tools facilitate even and smooth material deformation without burrs and notches. Therefore no secondary treatment required.

REMS Twist/Hurrican

Space and weight-saving combination set for efficient production of T-branches and for efficient cold-expanding of hard and soft tubes for installations without fittings. Only one drive unit for expanding and extracting tools. Price advantage! See page 261.



German Quality Product





Supply format

REMS Hurrican Set. Electric tube extractor for hard and soft copper tube \emptyset 10–22 mm, \emptyset %–%", s \le .5 mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 630 W. High torque at low speed, left and right-hand rotation. Safety tip switch. Continuous, electronic speed control from 0 to 1,000 rpm (accelerator switch). Drive holder. Tool holder, drill head, dimpling pliers, lubricant. Extractor tools for pipes in mm or inch. In sturdy steel case.

Description	ArtNo.	€
Set 12+15+18+22	151000 R220	985,06
Set 12 + 14 + 16 + 18 + 22	151010R220	1.048,38
Set 3/4 + 1/2 + 5/4 + 3/4 + 7/4"	151002 8220	1 058 76

Other voltages on request.

Accessories

Description	Tubes Ø mm/inch	ArtNo.	€
Extractor tool	10	151105R	67,89
	12	151110R	67,89
	14	151120R	67,89
	15	151125 R	67,89
	16	151130R	67,89
	18	151140R	67,89
	20	151145R	67,89
	22	151150R	67,89
	3/8"	151155R	72,04
	1/2"	151160R	69,96
	5/8"	151165R	69,96
	3/4"	151170R	69,96
	₹ %"	151175R	69,96
REMS Twist/Hurrica	an drive unit		
with stabiliser		151402R220	371,60
Tool holder		151200R	85,32
Drill head		151210RMM	127,67
Dimpling pliers		151230R	40,48
Lubricant (tin)		151240	9,34
Case with inlay		151618R	53,98





Powerful, compact power tool for rational cold expanding of hard and soft copper pipes for pipe installation without fittings.

Hard and soft copper tubes

Ø 12-22 mm

Ø 3% – 78" s ≤ 1 mm

REMS Twist – for making sockets yourself. Cold-expanding of hard copper pipes.

Cost advantage

No costs for annealing hard copper tubes, for deburring and cleaning, for fittings, storage, procurement. Savings in soldering joints, soldering material and working hours. Higher safety by fewer tube joints. Using up tube pieces to make sockets.

Design

Compact, robust, job site-proven. Simple and fast working free-hand, at vice or workbench. No adjustments. Integrated clamping device provides safe support against torque in both directions.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Handly, light, only 1.5 kg. Can be used anywhere, free-hand, also on pipes already installed. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 630 W, high-torque forward and reverse at low speed. The speed can be continuously controlled electronically by variable pressure on the safety switch from 0 to 1,000 rpm (accelerator switch).

Expander tools

One quick-changing expander tool of each tube size with rotating mandrel for easy expanding and smooth operation. Without annealing, standard socket in just a few seconds, extra long.

REMS Twist/Hurrican

Space and weight-saving combination set for efficient production of T-branches and for efficient cold-expanding of hard and soft tubes for installations without fittings. Only one drive unit for expanding and extracting tools. Price advantage! See page 261.



German Quality Product



Supply format

REMS Twist Set. Electric tube expander for hard and soft copper tubes \emptyset 12–22 mm, \emptyset %–%", s \leq 1 mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 630 W. High torque at low speed, left and right-hand rotation. Safety tip switch. Continuous, electronic speed control from 0 to 1,000 rpm (accelerator switch).. Drive holder. Lubricant. Expander tools for mm or inch. In sturdy steel case.

Description	ArtNo.	€
Set 12+15+18+22	156000 R220	1.078,48
Set 12 + 14 + 16 + 18 + 22	156002 R220	1.242,49
Set 3% + 1/2 + 5/8 + 3/4 + 7/8"	156004R220	1.242,49

Other voltages on request.

Accessories

Description	Tubes Ø mm/inch	ArtNo.	€
Expander tool	12	156150	173,35
•	14	156200	173,35
	15	156225	173,35
	16	156250	173,35
	18	156300	173,35
	22	156350	173,35
	3/8"	156375	173,35
	1/2"	156400	173,35
	5/8"	156425	173,35
	3/4"	156450	173,35
	7/8"	156475	173,35
REMS Twist/Hurrican	n drive unit		
with stabiliser		151402 R220	371,60
Lubricant (tin)		151240	9,34
Steel case with inser	t	151600R	110,03





REMS Twist/Hurrican

Powerful, compact power tool for rational manufacture of T-joints and rational cold expanding of hard and soft copper pipes for pipe installation without fittings. Combination of REMS Twist and REMS Hurrican.

Extracting:

Expanding:

Hard and soft copper tubes \emptyset 12 – 22 mm \emptyset 3 % – 7 8 "

s ≤ 1 mm

REMS Hurrican for making T-branches yourself. Inexpensive. Also on tubes already installed. REMS Twist for making sockets yourself. Cold-expanding of hard copper tubes.

Space and weight saving combi set. Only **one** drive unit for expander and extractor tools. Price advantage!

Description see REMS Hurrican and REMS Twist (page 259 – 260).



German Quality Product



Supply format

REMS Twist/Hurrican Combi Set. Electric tube expander and electric tube extractor for hard and soft copper tubes. Expanding Ø 12–22 mm, Ø %-%", s \leq 1 mm, extracting Ø 10–22 mm, Ø %-%", s \leq 1.5 mm. Drive unit with hexagon mount, maintenance-free gear, universal motor 230 V or 110 V, 50–60 Hz, 630 W. High torque at low speed, left and right-hand rotation. Stepless, electronic safety switch. Drive holder. Tool holder, drill head, dimpling pliers, lubricant. Choice of expander and extractor tools for pipes in mm or inch. In sturdy steel case.


Description	ArtNo.	€
Set 12+15+18+22	156010 R220	1.542,47
Set 12 + 14 + 16 + 18 + 22	156012 R220	1.782,25
Set 3/8 + 1/2 + 5/8 + 3/4 + 7/8"	156014R220	1.835,18

Other voltages on request.

Accessories

Description	Tubes Ø mm/inch	ArtNo.	€
Expander tool	12	156150	173,35
	14	156200	173,35
	15	156225	173,35
	16	156250	173,35
	18	156300	173,35
	22	156350	173,35
	3/8"	156375	173,35
	1/2"	156400	173,35
	5/8"	156425	173,35
	3/4"	156450	173,35
	₹8"	156475	173,35
Extractor tool	10	151105R	67,89
	12	151110R	67,89
	14	151120R	67,89
	15	151125R	67,89
	16	151130R	67,89
	18	151140R	67,89
	20	151145R	67,89
	22	151150R	67,89
	3/8"	151155R	72,04
	1/2"	151160R	69,96
	5/8"	151165R	69,96
	3/4"	151170R	69,96
	7/8"	151175R	69,96
REMS Twist/Hurricar with stabiliser	n drive unit	151/000000	271 (0
		151402R220	371,60
Tool holder		151200R	85,32
Drill head 10-22 mm		151210RMM	127,67
Drill head ¾-%"		151210 RMM	127,67
Dimpling pliers		151230R	40,48
Lubricant (tin)		151240	9,34
Steel case with insert	t	151600R	110,03



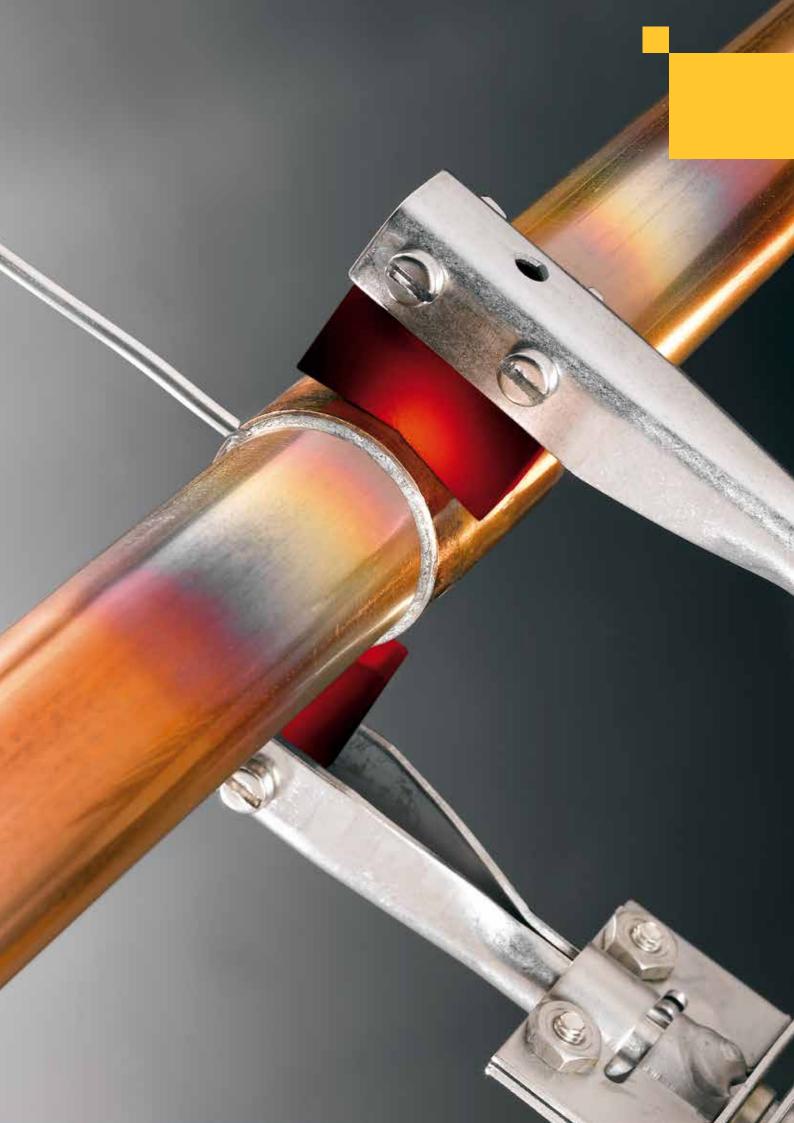

Soldering

Harts Harts Harts Harts Harts Harts	Cleaning pads	264
	Electric soldering pliers	264
	Electric soldering unit	265
***	Turbo soldering torches	266
	Solder wire and solder paste	267

Metal-free, highly flexible cleaning pads for cleaning surfaces to be soldered on copper tubes and soldering fittings. Also for other materials.

REMS Cu-Vlies – clean surfaces according to DVGW.

Universal use, for many materials, highly flexible. Cleans metallic clear, dirt and oxide-free, according to DVGW work sheet GW 2. Clean finish. Multiple use, reusable by washing out, thus long service life. Can be used wet or dry.

Supply format

REMS Cu-Vlies. Metal-free, highly flexible cleaning pad for cleaning areas to be soldered on copper pipes and soldering fittings. Pack of 10.

ArtNo.	€
160300R	10,28



German Quality Product

REMS Hot Dog 2

Efficient, light-weight electric tool for soft soldering. Directly connected to a socket, no transformer required. For trade and industry. For the building site and the workshop.

Copper tubes	Ø 10 – 28 mm
	Ø 3/8 – 11/8"
Heating capacity	800°C

REMS Hot Dog 2 – the smallest and most powerful soldering pliers. Super fast without flame.

Super fast soldering, e.g. Ø 18 mm in only 15 s. Enormous heating capacity up to 800° C through 2 heating cartridges. For permanent use.

Super light and handy, complete only 0.7 kg. Can be used anywhere, in confined areas also. $\,$

Electric soldering pliers



German Quality Product



Supply format

REMS Hot Dog 2 Set. Electric soldering pliers for soft soldering copper tubes \emptyset 10 – 28 mm, \emptyset % – 1%". 230 V, 50 – 60 Hz, 440 W. 250 g REMS Lot Cu 3 and REMS Paste Cu 3. Cleaning brush. In steel case with fire retarding insert.

TEMS Faste Cu 3. Cleaning brush. In steet case with the h	etarumy m	Seit.
	ArtNo.	€
	163020R220	455.68

Other voltages on request.

Accessories

Description	ArtNo.	€
REMS soldering material see page 267.		
Steel case with fire-proof inlay	163350R	76,81







Compact, powerful electric tool for soft soldering. With safety transformer. For trade and industry. For the building site and the workshop.

Copper tubes \emptyset 6-54 mm \emptyset 1/4 - 21/8 " Heating capacity 900°C (1650°F)

REMS Contact 2000 – the smallest, strongest and fastest unit of its kind. 2000 W soldering power. 4 m long soldering tongs cable.

Handy, compact. Favourable weight, small in size for work and transport. L \times W \times H: 210 \times 150 \times 140 mm.

Enormous heating capacity (900°C) ensures super-fast soldering. Rated power = Soldering capacity = 2000 W! Soldering time, e.g. for Ø 18 mm in only 18 s.

Can be used anywhere, with rod electrodes in tight spots also. Ready to solder any time, to be connected to a socket only. No adjustment of soldering current necessary. Wide work radius thanks to 4 m cable length. Flexible cable protector hose.

Indifferent to temperature influences electric control of soldering current.

Prisma-electrodes for universal use, maximum use through favorable seat. Rod-electrodes for working in tight spots. Electrode holders and bolts in stainless steel. Electrodes can be easily replaced.



Prisma-electrodes for universal use, maximum use through favorable seat.



German Quality Product



Supply format

REMS Contact 2000. Electric soldering unit for soft soldering of copper tubes \emptyset 6–54 mm, \emptyset % –2%". 230 V, 50–60 Hz, 2000 W, control voltage 24 V. Soldering pliers with 4 m cable length. Safety transformer, 2 prism electrodes. In a carton

iii a cai toii.		
	ArtNo.	€
	164011 R220	799,26

Other voltages on request.

Supply format

REMS Contact 2000 Super-Pack. Electric soldering unit for soft soldering of copper tubes Ø 6–54 mm, Ø $\frac{1}{2}$ %". 230 V or 110 V, 50–60 Hz, 2000 W, control voltage 24 V. Soldering pliers with 4 m cable length, safety transformer, 4 prism electrodes, 2 rod electrodes, 250 g quality soft solder REMS Lot Cu 3, 250 g quality soft solder paste REMS Paste Cu 3, 1 pipe cutter REMS RAS Cu-INOX 3-35, pack of 10 cleaning pads REMS Cu-Vlies. In sturdy steel case.

Art	tNo.	€
1640)50R220	995,44

REMS (3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max 3-max

Accessories

Description	ArtNo.	€
Prism electrodes (pack of 2)	164111R	25,43
Prism electrodes with holders (pack of 2)	164110 R	42,77
Rod electrodes (pack of 2)	164115R	26,47
Steel case with insert	164250R	128,71
REMS soldering material see page 267.		



Handy self-lighting torch with turbo-flame for fast soft soldering and economic gas consumption.

Copper tubes $\leq \emptyset$ 35 mm

Heating, annealing, burning, melting, thawing, shrinking and similar thermal procedures.

Flame temperature 1950°C (3500°F)

REMS Blitz - extremely fast soft soldering.

Piezo-electric self-lighting

Without igniter! Pull trigger – flame comes on! Release trigger – flame goes out! Little gas consumption, only 200 g/h!

Design

Super handy, ergonomic, with one hand only. No setting, no adjustment. Locking button for continuous operation. Only 1 universal flame tube. Small gas bottles can be used.

Turbo-flame

Spot-flame with turbo-twisting-booster for high heating capacity and super fast soft soldering.



REMS Blitz. Turbo soldering torch propane for soft soldering of copper tubes $\leq \emptyset$ 35 mm. Piezo-electric self-lighting. Hose connector BSPP %" LH. Hollow cap nut and socket BSPP %" LH. In blister pack.

ArtNo.	€
160010R	243,93









Accessories

Description	ArtNo.	€
REMS soldering material see page 267.		
High pressure hose 3 m, BSPP 3/8 LH	152106	90,41
Pressure reducer for 5 or 11 kg gas bottles (2 bar)	152109	116,36





REMS Macho

Handy self-lighting torch with turbo-flame for extremely fast brazing and soft soldering. Economic gas consumption.

Copper tubes and others $\leq \emptyset$ 64 mm

Heating, annealing, burning, melting, thawing, shrinking and similar thermal procedures.

Flame temperature 2500°C

REMS Macho – super fast brazing.

Piezo-electric self-lighting

Without igniter! Pull trigger – flame comes on! Release trigger – flame goes out! Little gas consumption, only 360 g/h!

Acetylene only

Injection torch burns atmospheric oxygen. Hence only acetylene necessary.

Design

Super handy, ergonomic, with one hand only. No setting, no adjustment. Locking button for continuous operation. Only 1 universal flame tube.

Turbo-flame

Spot-flame with turbo-twisting-booster for extremely high heating capacity and super fast brazing.

Supply format

REMS Macho. Turbo soldering torch acetylene for brazing and soft soldering of copper tubes and others $\leq \emptyset$ 64 mm. Piezo-electric self-lighting. Hose connector BSPP %" LH. Hollow cap nut and socket %" LH. In blister pack.

2011 70 2111 Hotton dap hat and obstact 70 2111 Hi bilotor paciti			
€	ArtNo.		
268,84	161010R		

Turbo soldering torch acetylene



German Quality Product





Accessories

REMS soldering material see page 267.

Soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation $\leq 110^{\circ}\text{C}$ (230°F).

In accordance with DVGW work sheet GW 2.

Alloy (weight %) 97 % Sn, 3 % Cu Melting temperature 230 – 250°C (450 – 480°F)

REMS Lot Cu 3 - quality soft solder.

Lead-free, harmless to health and environment. Silver-free, complies with standards. Very low price.

Supply format

REMS Lot Cu 3. 250-g spool soft solder wire Sn97Cu3, ISO 9453:2014, \emptyset 3 mm, for soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation $\leq 110^{\circ}$ C (230°F).

ArtN	o. €
160200	R 51.80



German Quality Product

REMS Paste Cu 3

Soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation $\leq 110^{\circ}\text{C}$ (230°F).

In accordance with DVGW work sheet GW 7 (DVGW-Reg.-Nr. DV-0101AT2244)

REMS Paste Cu 3 - quality soft solder paste.

Lead-free, harmless to health and environment. Silver-free, complies with standards. Very low price.

No additional flux consumption, paste contains flux already. Thus less danger of corrosion.

No overheating of tube and fitting because the melting of solder and the required temperature for soldering is clearly visible through the change of colour of paste.

High filling level of soldering joint, thereby good stability. Easy cleaning of remnants which are soluable in cold water.

Plastic bottle with brush integrated in cap which cannot get lost.

Supply format

REMS Paste Cu 3. 250-g soft solder paste of solder powder Sn97Cu3 according ISO 9453:2014 and flux 3.1.1.C, EN 29454-1:1994, for soft soldering of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, heating installation ≤ 110°C (230°F). DVGW approval mark. In plastic bottle with integrated brush.

ArtNo.	€
160210R	39,44

Soft solder paste of solder powder Sn97Cu3 according to ISO 9453:2014 and flux 3.1.1.C, EN 29454-1:1994



German Quality Product

REMS Lot P6

Brazing solder ISO 17672-CuP 179

Brazing of copper tubes with copper, red copper cast and brass fittings in cold and hot water installation, gas installation, refrigerating and air conditioning applications.

In accordance with DVGW work sheet GW 2.

Alloy (weight %) 94 % Cu, 6 % P Melting temperature 710 – 890°C (1310 – 1640°F)

REMS Lot P6 – quality brazing solder.

Universally applicable for almost all types of joints in copper pipe installations.

Specially useful for capillary brazing joints of copper pipe installations without fittings. Wide melting range due to low phosphor content result in higher toughness of soldering joint.

Silver-free, complies with standards. Very low price.

Supply format


REMS Lot P6. 1 kg brazing solder (rods) ISO 17672-CuP 179, \$\pm\$ 2 mm, for brazing of copper tubes with copper, red copper cast and brass fittings for cold and hot water installation, gas installation, refrigerating and air conditioning applications. In a carton

a ca. tc		
	ArtNo.	€
	160220R	61,55





Freezing

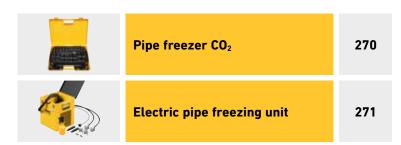

Simple, fast freezing of unemptied pipes with a carbon dioxide coolant. For repair, extensions of piping systems.

Steel, copper, plastic,

composite pipes

Ø 1/8 – 2" Ø 10 – 60 mm

Refrigerant: carbon dioxide.

Refrigerating capacity to -79°C (-110°F).

Non toxic, non flammable.

REMS Eskimo – freezing instead of draining. Super fast. Automatic refrigerant feed. High cooling capacity, e.g. ¾" steel pipe in only 5 min. Very small, indestructible freeze collars.

Refrigerant

Carbon dioxide coolant with high cooling performance up to -79°C. Non toxic. Non flammable. Easy to obtain.

Design

Tight contact between freeze collars and pipe and direct flow of the refrigerant onto the pipe ensure extremely short freezing times and economic refrigerant consumption. Freezing is possible on one or two sides, with additional T-distributors further freeze collars can also be connected.

Freeze collars

Easy. Rapid assembly, without special tools. Very small, highly flexible, indestructible freeze collars in cold-resistant thermoplastic elastomer, for operating even in the tightest spots. Clamping screws cannot get lost.

Handle piece with injector

Ergonomically designed handle pieces in plastic for comfortable operation. Unbreakable brass injector (injection nozzle). Fast and secure connection to freeze collars. No setting, the correct amount of refrigerant is automatically supplied.

High pressure hoses

Flexible, buckling-resistant and fractureproof high pressure hoses. Extra long for wide work radius. Extendable any time. Turnable hollow cap nut at bottle connector prevents high pressure hoses from tangling.







German Quality Product







Supply format

REMS Eskimo Set. Pipe freezing device for carbon dioxide coolant. For steel, cast iron, lead, copper, plastic pipes Ø % – 2", Ø 10 – 60 mm. Two freezing jackets each in 10 different sizes for the whole working range, flange connection with T-junction, locking nut, 2 handles with injector, 2 high-pressure hoses. In sturdy carrying case.

ArtNo.	€
130002R	596,85

Accessories

Description	Size		ArtNo.	€
Freezing jacket	1/8"	10/12 mm	130450	40,38
	1/4"	15 mm	130455	40,38
	3/8"	18 mm	130460	40,38
	1/2"	22 mm	130465	40,38
	3/4"	28 mm	130470	40,38
	1"	35 mm	130475	40,38
	11/4"	42 mm	130480	53,77
	11/2"		130485	53,77
		54 mm	130490	53,77
	2"	60 mm	130495	53,77
High-pressure hose 2 m			130415	115,22
T-distributor for further collar			130207	25,43
Bottle connection with T-distribut	or		130383	47,13
Locking nut			130209	6,23
Double nipple			130208	9,65
Handle piece with injector			130410	55,43
Case with inlay			130430R	101,72



Easy, fast freezing of pipes which are not drained. Closed refrigerant circuit. Environmentally safe. For repair and extension of piping systems.

Steel, copper, plastic, composite pipes

Ø 1/8 – 2"

Ø 10-60 mm

REMS Frigo 2 F-Zero – electrically freezing instead of draining. Super fast up to 2". High cooling capacity, e.g. ¾" steel pipe in only 9 min*. Particularly compact, patented deep-freezer heads, for very fast assembly. Temperature display with LCD digital thermometer.

System advantage

Only one pipe freezing unit for the complete working range up to 2". One-size freezer heads for the core working range 0 $\frac{1}{4}$ – 1" / 0 15 – 35 mm, no reducing inserts required. Aid the cooling process simply by spraying with water. Always clean freezer heads, no pastes/greases required.

Closed refrigerant circuit

Electric pipe freezing unit with closed refrigerant circuit. Environmentally safe. Can be used anywhere, also in closed rooms. Refrigerant R-290. High cooling capacity. Ideal also for longer repairs.

Design

Robust, compact. Very small deep-freezer heads fitted parallel to the pipe leaving refrigerant hoses for working in confined areas and niches also. Single or double freezing possible.

Cooling aggregate

Very quiet. Cooling aggregate, 430 W, in sturdy sheet metal housing with ventilating side openings for optimum air circulation. Large top compartment, easily accessible, for refrigerant hoses and accessories. Weighs only 23 kg. Easy to carry.

Deep-freezer heads

Very compact deep-freezer heads with special geometrically shaped cavities for seating different pipe diameters. Very small, only 50 mm wide. All pipe sizes from 0 % –1" resp. 0 15–35 mm can be frozen with only one deep-freezer head. Deep-freezer inserts for the rest of the capacity up to 2", 60 mm. Tightening straps for simple and quick assembly of deep-freezer heads onto the pipe, without tools.

Refrigerant hoses

Flexible, extra-long refrigerant hoses, $2.5\,\mathrm{m}$ long, in wear resistant, synthetic rubber for large work radius.

LCD-Digital-Thermometer

 $\ensuremath{\mathsf{LCD}}$ digital thermometer with clip, for exact temperature display directly at the freezing points.










German Quality Product

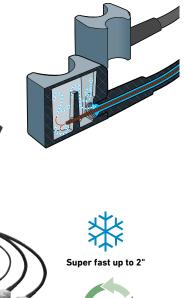

271

Supply format

REMS Frigo 2 F-Zero Set. Electric pipe freezing unit with closed refrigerant circuit. For steel, copper, plastic, composite pipes, Ø % – 2", Ø 10 – 60 mm. Cooling aggregate 230 V or 110 V, 50 Hz, 430 W, 2 refrigerant hoses, 2.5 m long, 2 LCD digital thermometers, 2 tightening straps, squirt bottle. Equipped for Ø % – 1%", 15 – 42 mm. In sturdy sheet metal housing. In a carton.

Art.-No. €
131012R220 **1.858,02**

Accessories

Description	Size		ArtNo.	€
Extension kit up to 2", 60 mm	11/2 - 2	"/54-60 mm	131160R	258,46
Deep-freeze inserts (pack of 2)	1/8"	10, 12 mm	131110R	93,63
	11/2"		131156R	86,47
		54 mm	131157R	86,47
	2"	60 mm	131158R	86,47
Clamping band			131104R	15,26
LCD digital thermometer			131116R	38,30





Pipe and Drain inspection Pipe and Drain cleaning



REMS MiniScope

Mobile, handy endoscope camera for low-cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes, etc. For cordless operation.

Camera head Ø 8 mm

REMS MiniScope – Brilliant pictures of cavities, shafts and pipes.

Design

Ultra light and handy. Controller unit with camera cable set only 0.4 kg. Can be used everywhere, free hand, over head, also in very confined spaces Sturdy, impact-proof plastic housing with ergonomically shaped handle. The buttons are located directly underneath the display so that it is possible to hold the device by the handle and operate the buttons with one hand. On/Off button, button for rotating, mirroring of the image by 180° respectively, button for regulating the brightness of the LEDs in the camera head in 8 stages, button for regulating the brightness of the colour display in 8 stages. Power LED for indicating the operating state. Battery compartment for 4 commercially available 1.5V, AA, LR6 batteries. Plug-screw connections for changing the camera cable set without tools. Sturdy case for controller unit, camera cable set 8-1 and accessories.

Controller unit with TFT-LCD colour display

Controller unit with 2.3" colour display with state of the art TFT-LCD technology for brilliant pictures, 320×240 pixels.

Battery operation

Controller unit with four 1.5 V, AA, LR6 batteries for approx. 6 hours of continuous operation.

Exchangeable camera cable set Color

Camera cable set Color 8-1, consisting of colour camera \emptyset 8 mm (640 × 480 pixels), with CMOS sensor, with dimmable white light LEDs for optimum setting of the brightness and fixed focus function, for automatic picture focus, protected against occasional immersion in water (IP 67), 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet.











Supply format

REMS MiniScope Set. Mobile, handy endoscope camera for low cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes etc. Controller unit with 2.3" TFT-LCD colour display. 4 batteries 1.5 V, AA, LR6. Camera cable set Color 8-1 with 1 m flexible push cable and add-on mirror, add-on hook, add-on magnet. In sturdy case.

€	ArtNo.		
133.90	175401R6		



Mobile, handy endoscope camera for low-cost inspection and damage analysis of places with difficult access such as cavities, shafts, pipes, etc. Documentation of photos and videos on MicroSD card. For battery and mains operation.

Camera head

REMS CamScope HD - Brilliant pictures and videos of cavities, shafts and pipes in HD quality $(1920 \times 1080 \text{ pixels})$. MicroSD card slot.

Ultra light and handy. Controller unit with pistol grip and camera cable set only 0.5 kg. Can be used everywhere, free hand, over head, also in very confined spaces Sturdy, impact-proof plastic housing with ergonomically shaped handle. The buttons are located directly underneath the display so that it is possible to hold the device by the pistol grip and operate the buttons with one hand. Bottoms, among other things, for regulating the brightness of the LEDs in the camera head and the display in 4 stages each, for rotating, mirroring and zooming the image shown in the display, calling and navigating in the menu. Power LED for indicating the operating state integrated into the On-Off button. Li-lon 3.7 V battery with $4.0\ \mbox{Ah}$ for long service life. Different HD camera cable sets can be used. Plug-screw connections for changing the camera cable sets without tools. Sturdy case of controller unit with pistol grip, camera cable set Color 8-1 HD 180°/90°, USB cable and accessories.

Controller unit with TFT-LCD colour display Controller unit with pistol grip with 5" colour display with state-of-the-art TFT-LCD technology and 480×854 pixels, for brilliant pictures and videos. Selectable menu language. MicroSD card slot. Pictures and videos in HD quality can be saved on a MicroSD card for simple documentation of the inspection result. 4x digital zoom. The date and time of the recording can be saved in the photo and video as an option. Immediate playback of saved recordings or transmission to other devices via MicroSD card. USB port for direct connection to a PC or laptop and for charging the battery.

Cordless and mains operation

Li-lon technology. Controller unit with pistol grip with integrated 3.7 V, 4.0 Ah Li-lon battery. Light and powerful. High energy density for approx. 5 hours continuous operation. The unit can be used in mains mode whilst charging the battery with the USB cable. No memory effect for maximum battery performance.

Exchangeable camera cable set Color

Consisting of colour camera Ø 8 mm, with CMOS sensor, with dimmable white light LEDs for optimum setting of the brightness and fixed focus function, for automatic picture focus, protected against occasional immersion in water (IP 67).

Camera cable set Color 8-1 HD 180°/90° with 180° straight and 90° angled colour camera, with 1 m flexible push cable and add-on hook, add-on magnet. Images and videos can be viewed and recorded from the selected colour camera or from both colour cameras simultaneously.

Camera cable set Color 8-5 HD with 5 m flexible push cable as an accessory.





















Supply format

REMS CamScope HD Set. Mobile, handy endoscope camera for low cost inspection and damage analysis of places with difficult access such as cavities shafts, pipes etc. Documentation of pictures and videos in HD quality on MicroSD card. Endoscope camera with 5" TFT-LCD colour display, 4x digital zoom, MicroSD card slot, USB port, integrated 3.7 V, 4.0 Ah Li-ion battery. Camera cable set Color 8-1 HD 180°/90°, 180° straight colour camera and 90° angled colour camera, with 1 m flexible push cable and add-on hook, add-on magnet. 32 GB MicroSD card. USB cable. In sturdy case.

ArtNo.	€
175400 R4	237,70



Accessories

Description	ArtNo.	€
Camera cable set Color 8-5 HD, colour camera Ø 8 mm,		
1280 × 720 pixels, with 5 m formable push cable	175440R	92,38



Mobile, handy camera inspection system for inexpensive inspection and damage analysis of pipes, drains, chimneys and other hollow cavities. With electronic metering. Also for inspection after pipe cleaning work and for acceptance of new installations or repairs. Documentation of pictures and videos on SD card. For battery and corded operation.

Camera head Ø 25 mm

Pipe Ø (40) 50 - 150 mm

Drains, chimneys, other cavities

REMS CamSys - Brilliant pictures and videos of pipes and drains. SD card slot. Electronic metering. Cordless and mains operation.

System advantage

Only one controller unit with TFT-LCD colour display for connecting different camera cable sets for different requirements. Therefore inexpensive conversion

Design

Mobile, handy, light. Can be used everywhere, even in very narrow places. Controller unit connected to the camera cable set by a 2 m connecting cable, removable for easy cleaning of the camera cable set. Various camera cable sets can be used. Plug-screw connections for changing the camera cable sets and the controller unit without tools. Sturdy case for controller unit, voltage supply/charger and

Controller unit with TFT-LCD colour display

Controller unit with 3.5" colour display with state of the art TFT-LCD technology for brilliant pictures and videos, 89 mm screen diagonal, 320 × 240 pixels. Very light and handy, only 0.4 kg. Sturdy, impact-proof plastic housing, spray protected. Small dimensions: $172 \times 121 \times 58$ mm. Keys for setting the brightness of the LEDs of the colour camera head. Full screen, 2x zoom, 4x rotation options for the picture. SD card slot. Pictures and videos can be saved on an SD card for simple documentation of the inspection result. Insertion depth of the camera is stored in the picture and the video, optionally also date and time of the recording. Pictures can be taken during video recording without impairing the video recording. Immediate playback of saved recordings or transmission to other devices with SD card. Pictures can also be taken later from the video during playback of recorded videos on the controller's colour display. USB connector for direct connection to PC or laptop. Video output socket Composite-Video PAL/NTSC for connecting an external monitor. Connection for voltage supply/charger Li-Polymer 100 - 240 V.

Cordless and mains operation

Li-Polymer Technology. Controller unit with integrated Li-Polymer battery 3.7V, 4.0 Ah. Light and powerful. Power supply/charger 100-240 V, 15 W, with USB port and USB cable for connecting power supply/charger, laptop or other voltage supply. No memory effect for maximum battery performance.

High resolution special colour camera

High resolution special colour camera Ø 25 mm with CMOS image sensor and 8 ultra bright, white LEDs with adjustable light intensity up to 1700 mcd and concentrated radiation angle for brilliant colour pictures with even illumination. Low light requirement due to very high light sensitivity (0.1 lux). Fixed focus and special lens with 90° wide angle, also for detecting the smallest details.

Exchangeable cable camera sets

Camera cable sets S-Color, consisting of special high-resolution colour camera with optional 30 m push cable Ø 5.4 mm, flexible, for Ø 50-150 mm, in hasp with electronic metre counter, 20 m push cable Ø 4.5 mm, very flexible, for small pipe diameters and narrower bends \emptyset (40) 50 – 150 mm, in the hasp with electronic metre counter or 10 m push cable Ø 4.5 mm with length mark, very flexible, for small pipe diameters and narrower pipe bends Ø (40) 50 – 150 mm, in the cable reel, with connection for controller unit. Very small, rounded camera head \emptyset 25 mm, water-tight up to 20 m (0.2 MPa/2 bar/29 psi) and highly flexible sliding spring tapered towards the push cable for effortless feeding even through several pipe bends. Camera head with strong, quick-change protective cap with inserted mineral glass pane. Bend-manoeuvring push cable in hybrid technology, with glass fibre core, data cables and plastic sheath, very stable, for long life. Robust, owdercoated, easy to clean cable cage. Hasp with rotary cage for simple unwinding and winding of the push cable and integrated sensor for electronic metering. Carrying case for camera cable set as an accessory.

Guide bodies

Various guide bodies for larger pipe diameters, firmly lockable on the camera head, as an accessory

























REMS CamSys

Supply format

REMS CamSys Set S-Color. Electronic camera inspection system for low-cost inspection and damage analysis. Documentation of pictures and videos on SD card with specification of date and time. Controller unit in microprocessor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery, 3.7 V, 4.0 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100-240 V, 50-60 Hz, 15 W, SD card 4 GB, USB cable, in sturdy case. Camera cable set S-Color with high resolution special colour camera Ø 25 mm with CMOS image sensor and push cable.

Description	Version	ArtNo.	€
Set S-Color 10 K	10 m push cable Ø 4.5 mm with length mark, very flexible, in cable reel. For small pipe diameters and narrower pipe bends Ø (40) 50 – 150 mm, drains, shafts, stacks and other cavities.	175008 R220	2.491,20
Set S-Color 20 H	20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metre counter. For small pipe diameters and narrower pipe bends Ø (40) 50 – 150 mm, drains, shafts, stacks and other cavities.	175007R220	3.456,54
Set S-Color 30 H	30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metre counter. For pipes Ø 50 – 150 mm, drains, shafts, stacks and other cavities.	175010 R220	3.559,30



Accessories

Description	ArtNo.	€
REMS CamSys Basic-Pack. Controller unit in micro-processor technology with 3.5" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery, 3.7 V, 4.0 Ah, in sturdy, impact-proof plastic housing, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100 – 240 V, 50 – 60 Hz, 15 W, SD card 4 GB, USB cable, in sturdy case.	175000 R220	1.401,30
Camera cable set S-Color 10 K with high resolution special colour camera Ø 25 mm with CMOS image sensor, 10 m push cable Ø 4.5 mm with length marking, very flexible, with connection for controller unit, in cable reel. For small diameters and narrower pipe bends Ø (40) 50 – 150 mm.	175305R	1.089,90
Camera cable set S-Color 20 H with high resolution special colour camera \emptyset 25 mm with CMOS image sensor and 20 m push cable \emptyset 4.5 mm, flexible, in the hasp with electronic metering and connection for controller unit. For small diameters and narrower pipe bends \emptyset (40) 50 – 150 mm.	175306R	2.055,24
Camera cable set S-Color 30 H with high resolution special colour camera Ø 25 mm with CMOS image sensor and 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering and connection for controller unit. For Ø 50–150 mm.	175011 R	2.158,00
Guide body Ø 62 mm S-Color/S-Color S,	1750575	405.00
for camera cable set S-Color/S-Color S Guide body Ø 100 mm S-Color/S-Color S,	175057 R	107,33
for camera cable set S-Color/S-Color S	175058R	124,35
Protective cap S-Color/S-Color S with mineral glass pane, sealing ring, for camera cable set S-Color/S-Color S	175026R	36,33
Carrying case for camera cable set	175123R	128,71
Case with inlay	175018R	98,61



Mobile, handy camera inspection system for inexpensive inspection and damage analysis of pipes, drains, chimneys and other hollow cavities. Self-levelling camera. Transmitter for localising camera heads. Electronic metering. Also for inspection after pipe cleaning work and for acceptance of new installations or repairs. Documentation of pictures and videos with voice recording on SD card. For battery and corded operation.

Camera head S-Color/S-Color S Ø 25 mm
Camera head S-Color S-N Ø 33 mm

Pipes, drains, chimneys, other cavities

REMS CamSys 2 – Brilliant pictures and videos of pipes and drains. Voice recording Self-levelling camera. Transmitter for localising camera heads. SD card slot. Electronic metering. Cordless and mains operation.

System advantage

Only **one** controller unit with TFT-LCD colour display for connecting different camera cable sets for different requirements. Therefore inexpensive conversion possible.

Design

Mobile, handy, light. Can be used everywhere, even in very narrow places. Controller unit connected to the camera cable set by a 2 m connecting cable, removable for easy cleaning of the camera cable set. Various camera cable sets can be used. Plugscrew connections for changing the camera cable sets and the controller unit without tools. Sturdy case for controller unit, voltage supply/charger and accessories.

Controller unit with TFT-LCD colour display

Controller unit with 7" colour display with state of the art TFT-LCD technology for brilliant pictures and videos, 178 mm screen diagonal, 720 x 480 pixels. Very light and handy, only 1.3 kg. Sturdy, impact-proof plastic housing, spray protected, glare protection. Integrated stand for different angles of inclination of the screen. Ergonomic grips with soft-grip and adjustable clamping bands, keys for picture and video, for one-hand operation by right and left handers. Small dimensions: $270 \times 164 \times 70$ mm. Keys for setting the brightness of the LEDs of the colour camera head. Full screen, 2x zoom, 4x rotation options for the picture. Adjustable automatic switch-off. SD card slot. Pictures and videos with voice recording can be saved on an SD card for simple documentation of the inspection result. Insertion depth of the camera is stored in the picture and the video, optionally also date and time of the recording. Pictures can be taken during video recording without impairing the video recording. Immediate playback of saved recordings or transmission to other devices with SD card. Pictures can also be taken later from the video during playback of recorded videos on the controller's colour display. USB connector for direct connection to PC or laptop. Video output socket Composite-Video PAL/NTSC for connecting an external monitor. Connection for voltage supply/charger 100-240 V.

Cordless and mains operation

Li-Polymer Technology. Controller unit with integrated Li-Polymer battery 3.7V, 7.6 Ah. Light and powerful. Power supply/charger 100 – 240 V, 15 W, with USB port and USB cable for connecting power supply/charger, laptop or other voltage supply. No memory effect for maximum battery performance.

High resolution special colour camera

High resolution special colour camera with CMOS image sensor and ultra bright, white light emitting diodes (LEDs) with adjustable light intensity up to 1700 mcd and concentrated radiation angle for brilliant colour pictures with evenly bright illumination. Low light requirement due to very high light sensitivity (0.1 lux). Fixed focus and special lens with 90° wide angle, also for detecting the smallest details.































Exchangeable cable camera sets

Camera cable set S-Color, consisting of a special high resolution colour camera \emptyset 25 mm with 20 m push cable \emptyset 4.5 mm, very flexible, for small pipe diameters and narrower bends Ø (40) 50 – 150 mm, in the hasp with electronic metering or 10 m push cable Ø 4.5 mm with length mark, very flexible, for small pipe diameters and narrower pipe bends Ø (40) 50-150 mm, in the cable reel. **Camera cable set S-Color S**, consisting of a special high resolution colour camera \emptyset 25 mm with 30 m push cable \emptyset 5.4 mm, flexible, for \emptyset 50 – 150 mm, in the hasp with electronic metering and 33 kHz transmitter for localising the camera head. Camera cable set S-Color S-N, consisting of a special high resolution colour camera Ø 33 mm with 30 m push cable Ø 5.4 mm, flexible, for Ø 70 – 150 mm, in the hasp with electrons and the second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second seco tronic metering, 33 kHz transmitter for localising the camera head and self-levelling camera for upright pictures and videos. Connection for controller unit. Very small, rounded camera head, water-proof up to 20 m (0.2 MPa/2 bar/29 psi) and highly flexible sliding spring tapered towards the push cable for effortless feeding even through several pipe bends. Camera head with strong, quick-change protective cap with inserted mineral glass pane. Bend-manoeuvring push cable in hybrid technology, with glass fibre core, data cables and plastic sheath, very stable, for long life. Robust, powder-coated, easy to clean cable cage. Hasp with rotary cage for simple unwinding and winding of the push cable and integrated sensor for electronic metering. Carrying case for camera cable set as an accessory.

Guide bodies

Guide body S-Color/S-Color S and S-Color S-N Ø 62 mm and Ø 100 mm, for greater pipe diameters, can be locked to camera head S-Color/S-Color S or S-Color S-N, as an accessory.

Tracker

REMS Explorer for localising a camera head with a 33 kHz transmitter, for determining the position of damages or the course of a pipe, as an accessory.



Supply format

REMS CamSys 2 Set S-Color. Electronic camera inspection system for low-cost inspection and damage analysis. Documentation of pictures and videos with voice recording on SD card with specification of date and time. Controller unit in microprocessor technology with 7" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery 3.7V, 7.6 Ah, in sturdy, impact-proof plastic housing, spray protected, glare protection, stand. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100-240V, 50-60 Hz, 15 W, SD card 4 GB, USB cable, video cable, in sturdy case. Camera cable set S-Color with high resolution special colour camera with CMOS image sensor and push cable.

Description	Version	ArtNo.	€
Set S-Color 10 K	High resolution special colour camera \emptyset 25 mm, 10 m push cable \emptyset 4.5 mm with length mark, very flexible, in the cable reel. For small pipe diameters and narrower pipe bends \emptyset (40) 50 – 150 mm, drains, shafts, stacks and other cavities.	175301 R220	3.051,72
Set S-Color 20 H	High resolution special colour camera Ø 25 mm, 20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metering. For small pipe diameters and narrower pipe bends Ø (40) 50 – 150 mm, drains, shafts, stacks and other cavities.	175302R220	4.017,06
Set S-Color S 30 H	High resolution special colour camera Ø 25 mm, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 50–150 mm, drains, shafts, stacks and other cavities.	175303R220	4.224,66
Set S-Color S-N 30 H	High resolution special colour camera Ø 33 mm, self-levelling, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For pipes Ø 70 – 150 mm, drains, shafts, stacks and other cavities.	175304R220	4.587,96



REMS CamSys 2

Description	ArtNo.	€
REMS CamSys 2 Basic-Pack Controller unit in microprocessor technology with 7" TFT-LCD colour display, SD card slot, USB port, video out socket PAL/NTSC, integrated Li-Polymer battery, 3.7 V, 7.6 Ah, in sturdy, impact-proof plastic housing, glare protection, stand, spray protected. 2 m connecting cable from the controller unit to the camera cable set, voltage supply/charger 100 – 240 V, 50 – 60 Hz, 15 W, SD card 4 GB, USB cable, video cable, in sturdy case.	175300 R220	1.961,82
Camera cable set S-Color 10 K High resolution special colour camera Ø 25 mm, 10 m push cable Ø 4.5 mm with length mark, very flexible, in the cable reel. For small diameters and narrower pipe bends Ø (40) 50 – 150 mm.	175305R	1.089,90
Camera cable set S-Color 20 H High resolution special colour camera Ø 25 mm, 20 m push cable Ø 4.5 mm, very flexible, in the hasp with electronic metering. For small diameters and narrower pipe bends Ø (40) 50 – 150 mm.	175306R	2.055,24
Camera cable set S-Color S 30 H High resolution special colour camera Ø 25 mm, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For Ø 50 – 150 mm.	175307R	2.262,84
Camera cable set S-Color S-N 30 H High resolution special colour camera Ø 33 mm, self- levelling, 33 kHz transmitter for localising the camera head, 30 m push cable Ø 5.4 mm, flexible, in the hasp with electronic metering. For Ø 70 – 150 mm.	175308R	2.626,14
Guide body Ø 62 mm S-Color/S-Color S, for camera head S-Color/S-Color S	175057R	107,33
Guide body Ø 100 mm S-Color/S-Color S, for camera head S-Color/S-Color S	175058R	124,35
Guide body Ø 62 mm S-Color S-N, for camera head S-Color S-N	175343R	59,48
Guide body Ø 100 mm S-Color S-N, for camera head S-Color S-N	175339R	83,46
Protective cap S-Color/S-Color S with mineral glass pane, sealing ring, for camera head S-Color/S-Color S	175026R	36,33
Protective cap S-Color S-N with mineral glass pane, sealing ring, for camera head S-Color S-N	175330R	86,05
REMS Explorer , tracker for localising a camera head with a 33 kHz transmitter	175312R	1.987,77
Carrying case for camera cable set	175123R	128,71
Case with inlay	175323R	98,61





Proven, reliable suction and pressure cleaning device for fast clearance of blockages.

REMS Pull-Push - fast clearance of blockages.

High pressing force by front, adjustable handle.

Optimum adaptation to the cleaning task by 2 sleeves: Short sleeve for wash basins and baths, long sleeve for toilets.









Supply format

REMS Pull-Push. Suction and pressure cleaning device for fast clearance of blockages. With short and long sleeve. In a box.

ArtNo	€
170300R	133,90

REMS Mini-Cobra

Proven, handy device for the fast unblocking of pipes, e.g. for kitchens, bathrooms and toilets.

For pipes Ø 20 – 50 (75) mm For drain cleaning cables Ø 6, 8, 10 mm

REMS Mini-Cobra - by hand or electric. Indispensable to remove small blockages.

Simple, robust, practical design. Handy, light. Only 2.9 kg. Easy operation also in traps and tight bends. Easy insertion of cable directly through strainers in sinks and drains. Locking of cable by quick-action chuck.

Drain cleaning cables

Cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight bends. Cable end with bulbous head (sink strainer head), thus easy to bend.

Cable drum

In hot-galvanized spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head. Corrosion-resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View to cable at all times.

Drive

By hand with easy action, easy grip crank handle or with suitable electric drill/ with suitable electric screwdriver, speed ≤ 300 rpm. Hexagon adapter for electric drive located in the drum cover.





Supply format

REMS Mini-Cobra. Pipe cleaning device for pipes Ø 20-50 (75) mm, with crank handle and hexagonal driver for electric drill/screwdriver. For drain cleaning cables Ø 6, 8 and 10 mm. Cable drum in shock-proof, glass-fibre reinforced plastic. Quick-action chuck. Cable Ø 8 mm × 7.5 m long. In a carton.

ArtNo.	€
170010R	185,80

Accessories

Description	Ø × Length	ArtNo.	€
Drain cleaning cable	8 mm × 7.5 m 10 mm × 10 m	170200 170205	69,03 140,03
Drain cleaning cable with core	8 mm × 7.5 m	170201	98,40
L-Boxx H system case with inserts		170118R	146,36





Electric pipe cleaning device with fast switchover. For effortless and quick application to remove pipe blockages in kitchen, bath, toilet.

For pipes
For drain cleaning cables

Ø 20-50 (75) mm

Ø 8, 10 mm

REMS Mini-Cobra S – Fast clearance of pipe blockages. Ultra fast reversal of direction of spiral feed/return by fast switchover.

Design

Compact unit of drive machine and cable drum. Handy, light. Only 5.7 kg. Combined thrust and grip handle for controlling the automatic feed-forward and reverse and for safe holding of the unit. Easy operation also in traps and tight bends.

Fast switchover

For easy operation and fast clearance of pipe blockages. Ultra fast reversal of direction of spiral feed/return by fast switchover (Patent EP 3 059 022) also under full load without changing the motor's direction of rotation, avoids looping of the drain cleaning cables when suddenly encountering resistance from pipe blockages, for long life of the drain cleaning cables.

Drain cleaning cables

Drain cleaning cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head (sink strainer head), thus easy to bend. Drain cleaning cables with core in high quality spring steel prevents ingress of dirt and generation of long fibres in the cable windings.

Cable drum

Corrosion resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View of the cable at any time.

Drive

Proven drive unit with hexagon mount. Enormously powerful. Robust, maintenance-free gear with safety slipping clutch. Universal motor, 630 W, high-torque forward and reverse at low speed. Stepless, electronic speed control. The speed between 0 and 950 rpm is controlled by pressing the tip switch steplessly (acceleration switch).



German Quality Product





Patent EP 3 059 022

Supply format

REMS Mini-Cobra S. Electric pipe cleaning device with fast switchover, for pipes Ø 20 – 50 (75) mm. For drain cleaning cables Ø 8 and 10 mm. Drive unit with maintenance-free gear, universal motor 230 V or 110 V, 50 – 60 Hz, 630 W, high-torque forward and reverse at low speed. Safety tip switch. Stepless, electronic speed control (acceleration switch) between 0 and 950 rpm. Cable drum in shock-proof, glass-fibre reinforced plastic. Cable Ø 8 mm, with core, 7.5 m long.

Description	ArtNo.	€
REMS Mini-Cobra S, in a carton	170022R220	559,48
REMS Mini-Cobra S Set, in sturdy steel case.	170023R220	663,28



Accessories

Description	Ø × Length	ArtNo.	€
Drain cleaning cable with core	8 mm × 7.5 m	170201	98,40
Drain cleaning cable	10 mm × 10 m	170205	140,03
Steel case		185058R	110,03



Mobile, handy, cordless pipe cleaning device with fast switchover. For effortless and quick application to remove pipe blockages in kitchen, bath, toilet. Li-Ion 22V Technology. For battery and corded operation.

For pipes \emptyset 20 – 50 (75) mm For drain cleaning cables \emptyset 8, 10 mm

REMS Mini-Cobra S 22V VE – fast clearance of pipe blockages anywhere. Ultra fast reversal of direction of spiral feed/return by fast switchover. With powerful, brushless battery motor.

Design

Compact unit of cordless drive unit and spiral drum. Mobile, handy, light. Complete with battery pack only 5.2 kg. Combined thrust and grip handle for controlling the automatic feed-forward and reverse and for safe holding of the unit. Easy operation also in traps and tight bends. Integrated LED work light for illuminating the work place.

Fast switchover

For easy operation and fast clearance of pipe blockages. Ultra fast reversal of direction of spiral feed/return by fast switchover (Patent EP 3 059 022) also under full load without changing the motor's direction of rotation, avoids looping of the drain cleaning cables when suddenly encountering resistance from pipe blockages, for long life of the drain cleaning cables.

Drain cleaning cables

Drain cleaning cables in high quality spring steel. Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends. Cable end with bulbous head (sink strainer head), thus easy to bend. Drain cleaning cables with core in high quality spring steel prevents ingress of dirt and generation of long fibres in the cable windings.

Cable drum

Corrosion resistant cable drum in shock-proof, glass-fibre reinforced plastic prevents pollution of the environment. Ventilation of the cable drum interior enables self-drying of cable. View of the cable at any time.

Drive

High-performance electro-mechanical drive with powerful, brushless motor $21.6V, 500\,\mathrm{W}$ output, extra torque powerful left and right hand rotation at specially adapted speed, robust, precision ball bearing-mounted gear, maintenance-free. Safety switch, electronically controlled for jolt-free switching on and off. Continuous, electronic speed control. The speed can be continuously controlled by variable pressure on the safety switch from 0 to 560 rpm (accelerator switch /VE)).

Battery or mains operation

Li-lon 22 $^{\circ}$ Technology. Highly resistant Li-lon 21.6V battery with 1.5, 4.4, 5.0 or 9.0 Ah capacity, for long service life. Light and powerful. Graduated charging status check by coloured LEDs. Operating temperature range – 10 to + 60 °C. No memory effect for maximum battery power. Rapid charger 100 – 240V, 90W. Rapid charger 100 – 240V, 290W, for shorter charging times, as accessory. 220 – 240V/21.6V, 15 A output, voltage supply for mains operation instead of Li-lon battery 21.6 V, as accessory.



German Quality Product





Patent EP 3 059 022





REMS Mini-Cobra S 22 V VE. Cordless pipe cleaning device with fast switchover, for pipes Ø 20–50 (75) mm. For drain cleaning cables Ø 8 and 10 mm. Drive unit with powerful, brushless battery motor 21.6 V, 500 W, maintenance-free, robust gear, extra torque powerful left and right hand rotation at low speeds, safety switch. Continuous, electronic speed control (accelerator switch (VE)) from 0 to 560 rpm. Battery Li-lon 21.6 V, 2.5 Ah, rapid charger 220–240 V, 50–60 Hz, 70 W. Cable drum in shock-proof, glass-fibre reinforced plastic. Cable Ø 8 mm, with core, 7.5 m long.

Description	ArtNo.	€
REMS Mini-Cobra S 22 V VE,		
in a carton	170025 R220	767,08
REMS Mini-Cobra S 22 V VE Set,		
in L-Boxx H system case	170027 R220	922.78

Other voltages on request.



Ø × Length	ArtNo.	€
8 mm × 7.5 m	170201	98,40
10 mm × 10 m	170205	140,03
	571571R22	258,46
y Li-lon 21.6 V, 4.4 Ah		372,64
Battery Li-lon 21.6 V, 5.0 Ah		310,36
ery Li-lon 21.6 V, 9.0 Ah		414,16
Hz, 90 W	571585R220	175,42
Rapid charger 100 – 240 V, 50 – 60 Hz, 290 W		414,16
50 – 60 Hz, 15 A,		
for mains operation instead of battery Li-Ion 21.6 V.		414,16
L-Boxx H system case with inserts		146,36
	8 mm × 7.5 m 10 mm × 10 m Hz, 90 W Hz, 290 W 50 – 60 Hz, 15 A, ery Li-lon 21.6 V.	8 mm × 7.5 m 170201 10 mm × 10 m 170205 571571R22 571574R22 571581R22 571583R22 Hz, 90 W 571585R220 Hz, 290 W 571587R220 50 – 60 Hz, 15 A, ery Li-lon 21.6 V. 571567R220





Handy, robust, compact machines for versatile use in pipe and drain cleaning. High-speed rotator with connectable cable sections. Proven technology.

For pipes \emptyset 20 – 250 mm For pipe and drain cleaning cables \emptyset 8, 16, 22, 32 mm

All pipe and drain cleaning cables and tools can also be used for other makes.

REMS Cobra – clear pipe – easy and fast. High-speed rotator with cable sections for work length up to 100 m. Effective chain knocking and milling up to 740 rpm. Closed drive spindle protects motor and drive against dirt and water.

High speed rotator with connectable cable sectionsHigh-speed rotator, 740 rpm (REMS Cobra 22) resp. 520 rpm (REMS Cobra 32), with cable sections for effective fast operation, e.g. during chain knocking or milling. Under difficult conditions also, e.g. roots and hard incrustations. Cable

milling. Under difficult conditions also, e.g. roots and hard incrustations. Cable sections to be connected as needed up to 70 m (REMS Cobra 22) resp. 100 m (REMS Cobra 32) work length. No unnecessary rotating of long pipe and drain cleaning cables.

Design

Robust, practical, splash-proof. Maintenance-free. Small in size. Favourable weight, drive unit REMS Cobra 22 only 19 kg, drive unit REMS Cobra 32 only 24 kg. Machine frame made of distortion-free cast aluminium with protective covers in shock-proof plastic material. REMS Cobra 22 with holders for part spirals 16 and 22 for fixing the part spirals to the machine frame when changing spirals. Chucking system which is located outside the machine housing with straight through undivided drive spindle for the pipe and drain cleaning cable. This enables a complete seal of the machine interior against dirt and water. Connecting cable with integrated personal protection switch (PRCD). Guide hose prevents excess rotation of pipe and drain cleaning cables and pollution of the environment. Legs with rubber caps guarantee a safe, floor-protecting stand.

High-performance pipe and drain cleaning cables
Specially hardened. Highly flexible for effortless feed-forward in tight pipe bends.
Rapid action coupling for fast extension and shortening. T-groove coupling with safety lock through spring-loaded thrust pin. Manual feed-forward for sensitive operation. Standard pipe and drain cleaning cable for universal pipe and drain cleaning jobs, highly flexible, specially suited for tight or several consecutive pipe bends. Pipe and drain cleaning cable S with thicker special spring steel for very difficult to remove obstructions, e.g. root cutting. Drain cleaning cables with weather-proof and temperature resistant plastic core prevents drain cleaning cable from dirt and generation of long fibres in the cable windings. Drive through REMS Cobra 22, REMS Cobra 32 or drive machines of other makes.

Clamping jaws for cable drive

Clamping jaws in high-grade hardened steel, resistant to wear and precise fit. Instant and exact clamping and opening of pipe and drain cleaning cables allow optimum control, power transmission and operating safety. REMS Cobra 22: Choice of pipe and drain cleaning cables Ø 16 mm and 22 mm, without changing the clamping jaws. Pipe and drain cleaning cable Ø 8 mm with adapter drum 22/8 and integrated clamping jaws, as accessory. REMS Cobra 32: Choice of drain cleaning cables Ø 22 and 32 mm, without changing the clamping jaws. Drain cleaning cables Ø 16 mm with clamping jaws 16, as accessory. Pipe and drain cleaning cable Ø 8 mm with adapter drum 32/8 and integrated clamping jaws, as accessory.

Drive

Powerful, quiet running capacitor motor with high torque, 750 W (REMS Cobra 22), 1050 W (REMS Cobra 32), right and left-hand rotation. Full transmission of motor power by a slipping-proof maintenance-free toothed belt drive. Straight through closed drive spindle. Permanently lubricated, maintenance-free roller bearings. Fast and secure run and stop of pipe and drain cleaning cable through strong, centrally located pressing lever provides central power input. Lever doubles as a carrying device without awkward locking.

Pipe and drain cleaning tools

Large variety of pipe and drain cleaning tools (page 288-289), also fit into pipe and drain cleaning machines of other makes.



German Quality Product



German Quality Product



Straight through closed drive spindle protects motor and drive against dirt and water.

Supply format

REMS Cobra 22 Set. Electric pipe and drain cleaning machine for pipes Ø 20–150 mm. Drive unit with maintenance-free belt drive, capacitor motor 230 V, 50 Hz, 750 W, right and left-hand rotation, guide hose. Personal protection switch (PRCD). Choice of cable and tool set 16 or/and 22. In a carton.

Description	Version	ArtNo.	€
Set 16	5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 1 pair of guide gloves, steel case for tool set	172010R220	1.806,12
Set 22	5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 1 pair of guide gloves, steel case for tool set	172011 R220	1.992,96
Set 16 + 22	5 cable sections 16 × 2.3 m in cable carrier, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator, 5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 2 pairs of guide gloves, steel case	177012 0220	2 225 50
	for each tool set	172012R220	2.335,50





Supply format

REMS Cobra 32 Set. Electric pipe and drain cleaning machine for pipes % 20 – 250 mm (% – 10°). Drive unit with maintenance-free belt drive, capacitor motor 230 V, 50 Hz, 1050 W, right and left-hand rotation, guide hose. Personal protection switch (PRCD). Choice of cable and tool set 32 or cable and tool sets 22 and 32 or 16 and 22. In a carton.

Description	Version	ArtNo.	€
Set 32	4 cable sections 32 × 4.5 m in cable carrier, straight auger 32, retrieving auger 32, funnel auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32, 1 pair of guide gloves, case for tool set	174010 R220	3.923,64
Set 22+32	5 cable sections 22 x 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed-cross-blade borer 22/35, cable joint-separator 22/32, 4 cable sections 32 x 4.5 m in cable carrier, straight-auger 32, retrieving auger 32, funnel-auger 32, toothed cross-blade borer 32/45, cable joint separator 22/32.2 pairs of guide gloves, steel case/case for each tool set	174011 R220	4.619,10
Set 16 + 22	5 cable sections 16 x 2.3 m in cable carrier, 2 clamping jaws 16, straight auger 16, bulbous auger 16, toothed blade borer 16/25, cable joint separator 16, 5 cable sections 22 x 4.5 m in cable carrier, straight auger 22, retrieving auger 22, funnel auger 22, toothed cross-blade borer 22/35, cable joint separator 22/32, 2 pairs of guide gloves, steel case for each		
	tool set	174012 R220	4.224,66





Accessories

Description	ArtNo.	€
REMS Cobra 22 drive unit with guide hose	172000 R220	1.650,42
REMS Cobra 32 drive unit with guide hose	174000 R220	3.051,72





REMS Cobra 22/32

Description	Size	ArtNo.	€
Cable and tool set 16 consisting of 5 cable sections 16 × 2.3 m in carrier, straight auger 16, bulbous auger 1 toothed blade borer 16/25, cable joint sepa	6, arator,	1720E0 D	/01 00
1 pair of guide gloves, steel case for tool se	et	172050R	601,00
carrier, straight auger 22, retrieving auger funnel auger 22, toothed cross-blade borer	consisting of 5 cable sections 22 × 4.5 m in cable carrier, straight auger 22, funded auger 22, funded auger 22, funded auger 22, toothed cross-blade borer 22/35, cable joint separator, 1 pair of guide gloves,		840,78
Cable and tool set 32 consisting of 4 cable sections 32 × 4.5 m in carrier, straight auger 32, retrieving auger funnel auger 32, toothed cross-blade borer cable joint separator 22/32, 1 pair of guide case for tool set	32, r 32/45,	174050 R	1.078,48
Adapter drum REMS Cobra 22/8 with cable Ø 8 mm × 7.5 m long, with bulbo	us head	170011	670,24
Adapter drum REMS Cobra 32/8 with cable Ø 8 mm × 7.5 m long, with bulbo	us head	170012	670,24
Clamping jaws 16 (pack of 2) for REMS Cobra 32 for clamping		17/104	404.40
drain cleaning cables Ø 16 mm		174101	121,13
Pipe and drain cleaning cable for pipe-Ø 10 – 50 (75) mm for pipe-Ø 25 – 125 mm for pipe-Ø 50 – 150 mm for pipe-Ø 50 – 250 mm	8 × 7.5 m 16 × 2.3 m 22 × 4.5 m 32 × 4.5 m	170200 171200 172200 174200	69,03 68,72 108,99 152,59
·			
Pipe and drain cleaning cable (5 pieces) in cable carrier	1/ 22	171001	(50.40
for pipe-Ø 25 – 125 mm	16 × 2.3 m	171201	450,18
Pipe and drain cleaning cable (5 pieces) in cable carrier for pipe-Ø 50 – 150 mm	22 × 4.5 m	172201	576,09
Pipe and drain cleaning cable (4 pieces) in cable carrier for pipe-Ø 50 – 250 mm	32 × 4.5 m	174201	728,68
Pipe and drain cleaning cable S With thick special spring steel for high stability, e.g. during root cutting, milling, chain knocking for pipe-Ø 25 – 125 mm for pipe-Ø 50 – 250 mm for pipe-Ø 50 – 250 mm	16 × 2 m 22 × 4 m 32 × 4 m	171205 172205 172205 174205	87,81 146,36 260,54
Pipe and drain cleaning cable with core prevents clogging of pipe and	32 * 4 111	174203	200,34
drain cleaning cable with dirt for pipe-Ø 25 – 125 mm for pipe-Ø 50 – 150 mm for pipe-Ø 50 – 250 mm	16 × 2.3 m 22 × 4.5 m 32 × 4.5 m	171210 172210 174210	95,18 174,38 204,49
Pipe and drain cleaning cable with core (5 pieces) in cable carrier for pipe-Ø 50 – 150 mm	22 × 4.5 m	172203	880,22
Pipe and drain cleaning cable with core (4 pieces) in cable carrier for pipe-Ø 50 – 250 mm	32 × 4.5 m	174203	936,28
Cable reduction 22/16 for connecting individual cables of different sizes	22/16	172154	124,56
Cable reduction 32/22 for connecting individual cables of different sizes	32/22	174154	144,28
Cable carrier (empty)	16 22 32	171150 172150 174150	106,60 106,91 118,33
Cable joint separator for releasing the safety lock	16 22/32	171151 172151	4,15 4,67




REMS Cobra 22/32

Description	Size	ArtNo.	€			
Straight auger for exploring the obstruction to withdraw a sample. Clearing of solid blockages caused by	16 22	171250 172250	34,77 45,67	The state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the s	Constitution .	
e.g. textiles, paper, kitchen waste	32	174250	57,61			Ding
Bulbous auger for minor obstructions caused by textiles and papers. Flexible, facilitates advancement in tight bends.	16 22 32	171265 172265 174265	34,77 45,78 59,79		Militaria	The state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the s
Funnel auger for textile and paper obstructions in particular. Especially useful for cleaning larger diameter pipes. Also be used as a recovery tool for cables left in the pipe.	16 22 32	171270 172270 174270	38,41 49,82 67,99		The state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the s	
Retrieving auger with extended, specially angled grappling arms. Used to recover cables left in the pipe. Not suitable for boring operations.	16 22 32	171275 172275 174275	34,77 48,99 58,44	Comme	Olu-	Contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of the contract of th
Serrated blade borer for boring out greasy or heavily silted pipes, e.g. drains of washing machines, dishwashers. Riveted to the connector (not soldered or welded), so as to prevent any deformation of the hardened spring steel blades.	16/25 22/35 22/45 32/55	171280 172280 172281 174282	31,87 46,81 58,85 76,71	~		· Oblin
Serrated cross-blade borer Universal use for obstructions of all kinds, including incrustations, e.g. limescale deposites on the inside of the pipe. Riveted to the connector (not soldered or welded), so as to prevent any deformation of the hardened spring steel blades. Operation with pipe and drain cleaning cable S recommended.	16/25 16/35 22/35 22/45 22/45 32/45 32/45 32/90 32/115	171290 171291 172290 172291 172293 174291 174293 174295 174296	61,45 69,23 82,42 92,59 88,96 93,11 112,10 138,05 148,43	e e		
Forked cutter to remove moderate to severe silting or persistent grease contamination. Made of hardened spring steel.	16	171305	40,79			
Cross-forked cutter to remove moderate to severe silting or persistent grease contamination. Made of hardened spring steel. Operation with pipe and drain cleaning cable S recommended.	16	171306	60,41	2		
Serrated forked cutter Versatile use, e.g. for removal of slurries and for mincing (crushing) of root infested pipe. Made of hardened spring steel.	22/65 32/65 32/90	172305 174305 174306	97,99 107,95 126,64			
Root cutter specially designed for root infested pipe. Hardened, replacable ring-type saw, cutting to front and rear. Operation with pipe and drain cleaning cable S recommended.	22/65 32/65 32/90	172310 174310 174311	145,32 160,89 183,73		0	
Chain knocker, smooth rings for final pipe and drain cleaning for removal of grease deposites and incrustations, e.g. limescale deposites on the inside of the pipe. For sensitive pipes, e.g. plastic.	16 22 32	171340 172340 174340	115,53 151,55 183,93	S		
Chain knocker, spiked links for final pipe and drain cleaning for removal of grease deposites and incrustations, e.g. limescale deposites on the inside of the pipe. For cast and concrete pipes.	16 22 32	171341 172341 174341	138,37 187,88 216,94	A Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of the Contract of	The state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the s	
Guide gloves, pair for secure gripping and guiding of pipe and drain cleaning cables		172610	24,50		- John .	Aldaha
Riveted guide glove, left Riveted guide glove, right for secure gripping and guiding of pipe and drain cleaning cables. Fully leather, inner surface riveted.		172610 172611 172612	51,07 51,07	Car y	The state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the state of the s	



Plastic Pipe Welding

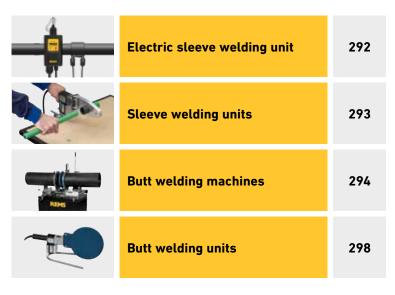

Powerful, handy unit for welding plastic drain pipes with electric sleeves in PE.

Plastic pipes and

electric sleeves in PE Ø 32 – 160 mm

For Geberit, Akatherm-Euro, Coes, Valsir, Waviduo

REMS EMSG 160-2 – automatic welding. Electronic control. Acoustic and visual monitoring of welding process.

Smallest sizes. Super-handy, light, only 1.1 kg. Can be used anywhere.

Electronic control with micro controller for automatic adjustment of welding current (welding temperature) and welding time according to sleeve size.

 $\label{prop:compensation} \mbox{ Automatic compensation of welding time in accordance with the ambient temperature.}$

Acoustic and visual monitoring of welding process.

Angled electrofusion plug for use in very confined spaces.

Wide work radius through extra-long cables.

Sturdy, impact-proof plastic housing with snap hook, for hanging next to the welding point. Dust and splash water-protected.

Manual pipe scraper for treating the surface of the pipe ends to be welded.







Angled electrofusion plug for use in very confined spaces.

Supply format

REMS EMSG 160-2. Electric sleeve welding unit 230 V, $50-60\,\text{Hz}$, $1000\,\text{W}$, for welding plastic drain pipes with electric sleeves in PE made by Akatherm-Euro, Coes, Geberit, Valsir, Waviduo, Ø $32-160\,\text{mm}$. Electronic control, with acoustic and visual monitoring of welding process. In a sturdy, impact-proof plastic housing with snap hook. Welding lead $3.9\,\text{m}$. Manual pipe scraper. In sturdy case

ota. aj cacc.	p.pc cc. apc	min onap noom motanig toda on	
. €	ArtNo.		
767,08	261002R220		



Powerful electric tools for efficient sleeve welding. Can be used anywhere, free-hand or on the work bench.

Plastic pipes and fittings

in PB, PE, PP, PVDF

Ø 16 – 125 mm

REMS MSG – heating element according to DVS. High quality PTFE coating of heating spigots/sockets.

Design

Handy, light, safe. Free-hand or work bench assembly. Supplied in standard with supporting stand and bench support for mounting the unit in a horizontal or vertical position (bench support not supplied for MSG 25).

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. Heating spigots and heating sockets according to DVS. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Fastening screws in stainless steel.

Temperature and temperature control

Choice of

- adjustable temperature 180 290°C, preadjusted to 260°C for PP pipes, with electronic temperature control with tight tolerance (EE) or
- Fixed temperature for PP pipes at 263 $^{\circ}$ C, with electronic temperature control with a tolerance of +/- 1% (FE).

The electronic and manual temperature control automatically controls the preadjusted temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.



REMS MSG. Sleeve welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. Heating element 230 V, 50-60 Hz, without PTFE-coated heating spigots and heating sockets. Optionally adjustable temperature $180-290^{\circ}\text{C}$, pre-set for PP pipes at 260°C , with electronic temperature control (EE) or fixed temperature for PP pipes at 263°C , with electronic temperature control (FE). Support stand. Bench support for mounting the welding unit in a horizontal or vertical position (not for MSG 25). Hexagon key for assembly and dismantling of heating spigots and heating sockets. In a carton.

Description	Pipes Ø mm	Power W	ArtNo.	€
25 EE	16-25	500	256020R220	516,92
63 FE	16-63	800	256213R220	380,95
63 EE	16-63	800	256220 R220	489,94
125 EE	16-125	1400	256320R220	725,56

Other voltages available.

Supply format

REMS MSG 63 FE Set. As REMS MSG 63 FE, but with PTFE-coated heating spigots, heating sockets for Ø 20, 25, 32 mm. Fastening screws in stainless steel. In steel case.

Description	Pipes Ø mm	Power W	ArtNo.	€
	16-63	800	256233R220	559,48

Other voltages available.

Supply format

REMS MSG 63 EE Set. As REMS MSG 63 EE, but with PTFE-coated heating spigots, heating sockets for Ø 20, 25, 32 mm. Fastening screws in stainless steel. In steel case.

Description	Pipes Ø mm	Power W	ArtNo.	€
	16-63	800	256240R220	799,26

Other voltages available.

Accessories

Description	Pipes Ø mm	ArtNo.	€
Heating spigot, heating	16	256400	54,81
socket, fastening screw	17	256410	54,81
in stainless steel	18	256420	54,81
	19	256430	54,81
	20	256440	54,81
	25	256450	60,93
	32	256460	68,20
	40	256470	90,10
	50	256480	103,38
	63	256490	139,09
	75	256500	244,97
	90	256510	265,73
	110	256520	309,32
	125	256530	361,22
Steel case			
REMS MSG 25, REMS MSG 63		256242	139,09
REMS MSG 125		256342	184,76













Handy, easy-to-carry compact machine. Complete only 45 kg. Ideal for sanitary installations and installation of drain pipes, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes a	nd fittings	3	
in PB, PE, PP, F	PVDF		Ø 40-160 mm
PE Ø 40 - 90 mm	SDR ≥ 6		
PE Ø 40 – 110 mm	SDR ≥ 9		
PE Ø 40 – 125 mm	SDR ≥ 11		
PE Ø 40 – 140 mm	SDR ≥ 17		
PE Ø 40 – 160 mm	SDR ≥ 21		

REMS SSM 160RS - ideal for the pipe fitter.

Light and compact. Heating element according to DVS. Electronic temperature control. High-quality PTFE coating. Powerful facing cutter. Closed facing cutter housing.

Design

Light and compact. Low weight, complete only 60 kg.

Can be easily carried by one person.

- Base frame in cast aluminium
- Free suspension of butt welding unit REMS SSG 180
 - for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Can be used on the workbench or on the tubular stand provided as standard (= sub-frame = transport device).

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Protective cover for heating element.

Electronic temperature control

Adjustable temperature $180-290^{\circ}$ C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device, also for angular branches

Sturdy quick clamping device made of nickel-plated steel, consisting of 2 vices with 2 clamping inserts each for pipes of \emptyset 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. Also suitable for angular branches.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes \emptyset 160 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes \emptyset 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm.

Supply format

REMS SSM 160RS. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF, PE Ø 40−90 mm SDR ≥ 6, PE Ø 40−110 mm SDR ≥ 9, PE Ø 40−125 mm SDR ≥ 11, PE Ø 40−140 mm SDR ≥ 17, PE Ø 40−160 mm SDR ≥ 21. Butt welding unit with PTFE-coated heating element 230 V, 50−60 Hz, 1200 W. Adjustable temperature 180−290°C, preset for PE pipes. Electronic temperature control. Protective cover for heating element. Electric planing device 230 V, 50−60 Hz, 500 W. Pressing device. Quick clamping device, also for angular branches, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Work key. Steel case for pipe support inserts and clamp inserts. Tubular stand = base frame = carrying device.

	, ,	
€	ArtNo.	
4.562,01	252026R220	





Accessories

Description	ArtNo.	€
Planing blade (piece)	252103R	124,56



Powerful, proven, easy-to-transport compact machine. Ideal for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes.

For job site and workshop.

Plastic pipes and fittings in PB, PE, PP, PVDF \emptyset 40 – 160 mm PE \emptyset 40 – 90 mm SDR \geq 6 PE \emptyset 40 – 110 mm SDR \geq 9 PE \emptyset 40 – 125 mm SDR \geq 11 PE \emptyset 40 – 140 mm SDR \geq 17 PE \emptyset 40 – 160 mm SDR \geq 21

REMS SSM 160KS – ideal for the pipe fitter. Heating element according to DVS. Electronic temperature control. High-quality PTFE coating. Powerful facing cutter. Closed facing cutter housing.

Design

Compact, robust, job site-proven. Machine on sheet metal base weighs 101 kg. Easy to carry.

- Base frame in aluminium cast
- Free suspension of butt welding unit REMS SSG 180 for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Machine on sheet steel base with built-in drawer for clamping and pipe rest inserts
- Suitable for use on a work bench or on the standard supplied sheet metal cabinet (= carrying case).

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area. Protective cover for heating element.

Electronic temperature control

Adjustable temperature $180-290^{\circ}$ C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device, also for angular branches

Sturdy quick clamping device made of nickel-plated steel, consisting of 2 vices with 2 clamping inserts each for pipes of \emptyset 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. Also suitable for angular branches.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes of Ø 160 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm.

Supply format

REMS SSM 160KS. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF, PE Ø 40–90 mm SDR \geq 6, PE Ø 40–110 mm SDR \geq 9, PE Ø 40–125 mm SDR \geq 11, PE Ø 40–140 mm SDR \geq 17, PE Ø 40–160 mm SDR \geq 21. Butt welding unit with PTFE-coated heating element 230 V 50–60 Hz, 1200 W. Adjustable temperature 180–290°C, preset for PE pipes. Electronic temperature control. Protective cover for heating element. Electric planing device 230 V, 50–60 Hz, 500 W. Pressing device. Quick clamping device, also for angular branches, consisting of 2 vices with 2 clamping inserts each Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140, 160 mm. 2 pipe rests Ø 160 mm with pipe rest inserts Ø 40, 50, 56, 63, 75, 90, 110, 125, 135, 140 mm. Sheet steel base with built-in drawer. Work key. Closed sheet metal cabinet = carrying case.

€	ArtNo.
6.087,87	252046R220









Description	ArtNo.	€
Planing blade (piece)	252103R	124,56



Powerful, proven, easy-to-transport compact machine. Ideal for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes.

For job site and workshop.

Plastic	pipes	and	fittings

Plastic pipes an	ia nittings	
in PB, PE, PP, P	VDF	Ø 75-250 mm
PE Ø 75-140 mm	SDR ≥ 6	
PE Ø 75-160 mm	SDR ≥ 9	
PE Ø 75-180 mm	SDR ≥ 11	
PE Ø 75 – 200 mm	SDR ≥ 13.6	
PE Ø 75 – 225 mm	SDR ≥ 17.6	
PE Ø 75 – 250 mm	SDR ≥ 22	

REMS SSM 250KS - compact and robust.

Design

Compact, robust, job site-proven. Easy to carry. Machine on sheet metal base weighs 109 kg.

- Base frame in aluminium cast
- Free suspension of butt welding unit for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device, also suitable for angular branches.
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Machine on sheet steel base with built-in drawer for clamping and pipe rest inserts.
- Suitable for use on a work bench or on the standard supplied sheet metal cabinet (= carrying case).

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature 180 - 290°C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device for angular branches

Sturdy quick clamping device made of nickel-plated steel which grips the pipe all round, consisting of 2 clamps \emptyset 250 mm with jaws \emptyset 250 mm, with 2 clamping jaws and 2 clamping inserts each for pipes of Ø 75, 90, 110, 125, 160, 200 mm. Also suitable for angular branches. Clamping jaws and clamping inserts available for pipes of Ø 140, 180, 225 mm.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for supporting and easy axial alignment of pipes and fittings. 2 pipe support inserts each for pipes Ø 75, 90, 110, 125, 140, 160, 180, 200, 225, 250 mm. Pipe rest inserts available for pipes of Ø 140, 180, 225 mm.

Supply format

REMS SSM 250K. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 75−140 mm SDR ≥ 6, PE Ø 75−160 mm SDR ≥ 9, PE Ø 75−180 mm SDR ≥ 11, PE Ø 75−200 mm SDR ≥ 13.6, PE Ø 75−225 mm SDR ≥ 17.6, PE Ø 75 – 250 mm SDR ≥ 22. Butt welding unit with PTFE-coated heating element 230 V, 50 – 60 Hz, 1300 W. Adjustable temperature 180 – 290°C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50-60 Hz, 500 W. Quick clamping device, also for angular branches, consisting of 2 clamps \emptyset 250 mm with jaws \emptyset 250 mm, with 2 clamping jaws and 2 clamping inserts each for pipes of \emptyset 75, 90, 110, 125, 160, 200 mm. 2 pipe rests with pipe rest inserts \emptyset 75, 90, 110, 125, 160, 200, 250 mm. Sheet steel base with built-in drawer. Work key. Closed sheet metal cabinet = carrying case.

€	ArtNo.	
9.881,76	254025R220	







Accessories

Description	ArtNo.	€
Planing blade (piece)	254103	183,73



Compact, easy-to-transport high-performance machine for sanitary installation, drain pipe installation, chimney reconstruction with PVDF pipes. For job site and workshop.

Plastic pipes and fittings

in PB, PE, PP, PVDF
PE Ø 90 − 180 mm SDR ≥ 6
PE Ø 90 − 200 mm SDR ≥ 7.4
PE Ø 90 − 225 mm SDR ≥ 9
PE Ø 90 − 250 mm SDR ≥ 13.6
PE Ø 90 − 280 mm SDR ≥ 17
PE Ø 90 − 315 mm SDR ≥ 21

REMS SSM 315RF – convenient for job site and workshop.

Design

Compact, robust, job site-proven. Weight including tubular stand on wheels 154 kg.

- Base frame in aluminium cast
- Free suspension of butt welding unit for exact alignment of the faces to be welded
- Electric facing cutter unit for plane-parallel machining of pipe ends
- Smooth sliding, roller-bearing mounting of butt welding unit and electric facing cutter unit
- Quick clamping device
- Pressing device, clear scale for easy reading of jointing pressure, clamping handle for pressure holding
- Standard supply with tubular wheel stand for secure standing and easy transport.

Heating element according to DVS

Plate-shaped, plane-parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature $180-290^{\circ}$ C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.

Facing cutter unit

Electric facing cutter unit with special, high torque universal motor, 500 W, for plane-parallel machining of one or both pipe ends according to DVS. Fast positioning of facing cutter with proven safety switch. Closed facing cutter housing. Specially hardened and specially ground planing blades guarantee easy, vibration-free planing.

Quick clamping device

Sturdy quick clamping devices made of nickel-plated steel which grip the pipe all round, for pipes of Ø 315 mm. 4 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. Clamping inserts available for pipes of Ø 140, 180, 225, 280 mm.

Pipe supports

Multiple adjustment, easy positioning of pipe supports for pipes \emptyset 315 mm for supporting and easy axial alignment of pipes and fittings. 2 pipe rest inserts each for pipes of \emptyset 90, 110, 125, 160, 200, 250 mm. Pipe rest inserts available for pipes of \emptyset 140, 180, 225, 280 mm.

Supply format

REMS SSM 315RF. Butt welding machine for plastic pipes and fittings in PB, PE, PP, PVDF. PE Ø 90 – 180 mm SDR \geq 6, PE Ø 90 – 200 mm SDR \geq 7.4, PE Ø 90 – 225 mm SDR \geq 9, PE Ø 90 – 250 mm SDR \geq 13.6, PE Ø 90 – 280 mm SDR \geq 17, PE Ø 90 – 315 mm SDR \geq 21. Butt welding unit with PTFE-coated heating element 230 V, 50 – 60 Hz, 3000 W. Adjustable temperature 180 – 290°C, preset for PE pipes. Electronic temperature control. Electric facing cutter unit 230 V, 50 – 60 Hz, 500 W. Pressing device. 2 quick clamping devices Ø 315 mm with 2 clamping inserts each for pipes of Ø 90, 110, 125, 160, 200, 250 mm. 2 pipe supports Ø 315 mm with pipe support inserts Ø 90, 110, 125, 160, 200, 250 mm. Ring spanner. Boxes for clamping and pipe rest inserts. Tubular stand on wheels.

€	ArtNo.			
13.491.92	255020R220			









Accessories

Description	ArtNo.	€
Planing blade (piece)	255103	196,18



Powerful electric tools for efficient butt welding. Can be used anywhere, free-hand or on the work bench.

Plastic pipes and fittings in PB, PE, PP, PVDF

≤ Ø 280 mm

REMS SSG – heating element according to DVS. Electronic temperature control. High-quality PTFE coating.

Design

Handy, light, safe. Free-hand or work bench assembly. Supplied as standard with supporting stand. Bench support available as accessory for mounting the unit in a horizontal or vertical position.

Heating element according to DVS

Plate-shaped, plane parallel heating element according to DVS. Electric heater embedded in corrosion-resistant cast aluminium for indirect heat transfer. High-quality, long-lasting PTFE coating prevents adherence of plastic remnants as well as oxidizing, and enables easy cleaning. Ideal temperature distribution and constant temperature at the complete working area.

Electronic temperature control

Adjustable temperature $180-290^{\circ}$ C, preset for PE pipes. The electronic temperature control automatically controls the preset temperature within the permitted range according to DVS. Temperature control lamp and power control lamp.









Supply format

REMS MSG. Butt welding unit for plastic pipes and fittings in PB, PE, PP, PVDF. PTFE-coated heating element 230 V, 50 – 60 Hz. Adjustable temperature 180 – 290°C, preset for PE pipes. Electronic temperature control. Support stand. In a carton.

Description	Heating element Ø mm	Pipes ≤ Ø mm	Power W	ArtNo.	€
110/45° EE	125	110	500	250020 R220	517,96
125 EE	145	125	700	250120R220	560,52
180 EE	200	180	1200	250220R220	643,56
280 EE	300	280	1300	250320R220	778,50

Accessories

Description	ArtNo.	€
Bench support for mounting the unit		
in a horizontal or vertical position		
REMS SSG 110/45°, 125, 180	250041	69,23
REMS SSG 280	250341	71,10
Steel case		
REMS SSG 110/45°	250042	107,95
REMS SSG 125	250142	107,95
REMS SSG 180	250242	107,95
REMS SSG 280	250342	153,62
Protection cover for heating element		
REMS SSG 110, 110/45°, 125	250143	42,87
REMS SSG 180	250243	44,12
REMS SSG 280	250343	50,65





Diamond core drilling Diamond chasing and cutting machine Wet and dry suction

	Electric diamond core drilling machines	302
11	Drill stands	310
	Universal diamond core drilling crowns	312
	Universal diamond core drilling crowns LS	314
p.	Electric diamond core drilling machine with micro-pulse technology	316
	Dry diamond core drilling crowns LS	319
	Tile drilling	320
	Diamond chasing and cutting machine	322
	Diamond cutting discs	323
	Dry and wet extractor	324

Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete,

steel-reinforced concrete

≤ Ø 102 (132) mm

Masonry and other materials

≤ Ø 162 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 312 – 314.

REMS Picus S1 – Core drilling instead of chiselling. Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min.

1 system – 4 applications. Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. For many materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1% male, BSPP $\frac{1}{2}$ female. Robust, suitable for the building site. Extra light, only 5.2 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete \emptyset 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat \emptyset 60 mm for holding the drive machine in the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection $\frac{1}{2}$ ". Suction rotor for sucking off dust for dry drilling with connection for conventional vacuum cleaner, as accessory.

Drive

Robust, powerful 1850 W universal motor. Load speed drilling spindle 580 rpm. Stable, maintenance-free gear. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 312–314). Connecting thread UNC 1½ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/ work place limit of > 0.1 $\,\mathrm{mg/m^3}$). Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull 2 and other suitable extractors, as accessory (page 311). REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 324).

Drilling start aid


Drilling start aid G % UDKB, with bores for extracting the drilling dust from the bore hole by a suction rotor for dust extraction, with carbide masonry drill \emptyset 8 mm.

Water extractor unit

Water extractor unit for wet drilling up to \emptyset 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer \emptyset 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 310).

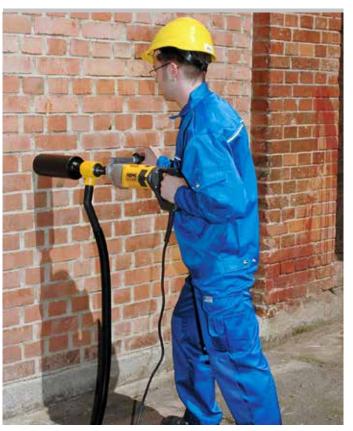









REMS Simplex 2

REMS Titan



REMS Picus S1 Basic-Pack

REMS Picus S1 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete ≤ Ø 102 (132) mm, masonry and other materials ≤ Ø 162 mm. For dry and wet drilling, hand held or with drill stand. Drive machine with drilling crown connecting thread UNC 1½ male, BSPP ½ female, maintenance-free gear with safety slip clutch, universal motor 230 V, 50−60 Hz, 1850 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Load speed drilling spindle 580 rpm. Water supply device with adjustable shut-off valve and quick coupling with water stop and ½" hose connection. Stabiliser. Drilling start aid G ½ UDKB with drill Ø 8 mm, Allen key size 3. Single open-ended wrench size 32. In sturdy steel case.

Art.	-No.	€
18001	0R220	1.629,66

Other voltages on request.

Supply format

REMS Picus S1 Set Simplex 2. REMS Picus S1 Basic-Pack with REMS Simplex 2 drilling stand including tools and fastening kit for masonry and concrete.

€	ArtNo.
2.646,90	180032R220

Other voltages on request.



REMS Picus S1 Set Simplex 2

Accessories

Description	ArtNo.	€
REMS Picus S1 drive unit	180000R220	1.577,76
Steel case with inlay	180600R	128,71

REMS Universal diamond core drilling crowns,

inductively soldered, resolderable, see page 312.

REMS universal diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 314.

REMS Pull 2 L / M, dry and wet extractors, see page 324

Additional accessories see page 310-311.





Powerful, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete,

steel-reinforced concrete

≤ Ø 152 (200) mm

Masonry and other materials

≤ Ø 250 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 312 – 314.

REMS Picus S3 – Core drilling instead of chiselling. Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min.

1 system – 4 applications. Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1½ male, BSPP ½ female. Robust, suitable for the building site. Only 7.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½". Suction rotor for sucking off dust for dry drilling with connection for conventional vacuum cleaner, as accessory.

Drive

Robust, powerful 2200 W universal motor. Stable, maintenance-free 3-speed gear for optimum selection of load speed according to the drilling diameter. Load speed drilling spindle 530 rpm, 1280 rpm, 1780 rpm. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 312–314). Connecting thread UNC 1½ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/ work place limit of > 0.1 mg/m³). Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull 2 and other suitable extractors, as accessory (page 311). REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 324).

Drilling start aid

Drilling start aid G $\frac{1}{2}$ UDKB, with bores for extracting the drilling dust from the bore hole by a suction rotor for dust extraction, with carbide masonry drill \emptyset 8 mm, as accessory.

Water extractor unit

Water extractor unit for wet drilling up to \emptyset 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer \emptyset 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 310).













REMS Titan



REMS Picus S3 Basic-Pack



REMS Picus S3 Set Titan



REMS Picus S3 Set 62-82-132 Titan

REMS Picus S3 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete $\leq \emptyset$ 152 (200) mm, masonry and other materials $\leq \emptyset$ 250 mm. For dry and wet drilling, hand held or with drill stand. Drive machine with drilling crown connecting thread UNC 1½ male, BSPP ½ female, maintenance-free 3-speed gear with safety slip clutch, universal motor 230 V, 50 – 60 Hz, 2200 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock, personal protection switch (PRCD). Load speed drilling spindle 530 rpm, 1280 rpm, 1780 rpm. Water supply with adjustable shut-off valve and quick-coupling with water stop and hose connection ½^{**}. Stabiliser. Starting aid BSPP ½, Allen key size 3. Single open-ended wrench size 32. In sturdy steel case.

	nze o. omgre open ended wrenen size oz. m stardy steet case.	
€	ArtNo.	
2.024,10	180011 R220	

Other voltages on request.

Supply format

REMS Picus S3 Set Titan. REMS Picus S3 Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

ArtNo.	€
180029 R220	3.570,72

Other voltages on request.

Supply format

REMS Picus S3 Set 62+82+132 Titan. REMS Picus S3 Basic-Pack with REMS Universal diamond core drilling crowns UDKB Ø 62+82+132 mm and REMS Titan drilling stand including fastening kit for masonry and concrete.

	,, ,, ,, ,, ,, ,, ,, ,
€	ArtNo.
4.198,71	180028 R220

Other voltages on request.

Accessories

Description	ArtNo.	€
REMS Picus S3 drive unit	180001 R220	1.972,20
Steel case with inlay	180600R	128,71
REMS Universal diamond core drilling crowns, inductively soldered, resolderable, see page 312.		
REMS universal diamond core drilling crowns LS, laser welded, high temperature-resistant, see page 314.		
REMS Pull 2 L / M, dry and wet extractors, see page 324		





All prices excl. VAT

Additional accessories see page 310-311.

REMS Picus SR

Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. With speed regulation. Dry or wet drilling, hand held or with drill stand. For trade and industry.

Concrete,

steel-reinforced concrete ≤ Ø 162 (200) mm

Masonry and other materials

≤ Ø 250 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 312–314.

REMS Picus SR – Core drilling instead of chiselling. Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. With speed regulation.

1 system – 4 applications. Ideal for plumbers.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1½ male, BSPP ½ female. Robust, suitable for the building site. Extra light, only 6.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 3 min. Practical spade handle and stabiliser for hand held drilling. Throat Ø 60 mm for holding the drive machine in the drill stand. Spacer set for additional stabilisation of the REMS Picus SR drive unit on the REMS Titan drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick-coupling with water stop and hose connection ½".

Drive

Robust, powerful 2200 W universal motor. Overheating protection by temperature monitoring of the motor's field winding with a PTC resistor (Positive Temperature Coefficient). Stable, maintenance-free, 2-step gear. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Speed-Regulation

Stepless electronic speed regulation of the drive machine for selecting the speed according to the material. The speed is steplessly adjustable on the dial: 250 rpm to 500 rpm (1st gear) or 600 rpm to 1200 rpm (2^{nd} gear). The electronic speed control that is being used keeps the selected speed constant, also under load. The speed of the drilling crown is kept at the nominal value until it meets with resistance and drops below a critical value. The drive motor stops. When the load on the drive unit is relieved again, the drill runs back up to nominal speed so that work can continue immediately at nominal speed (Patent EP 2 085 191). Advantage: The optimum drilling speed (load speed) selected for the respective material and the drilling crown diameter remains constant for the entire duration of the drilling. For the best drilling performance and maximum life of the drilling crowns.

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 312–314). Connecting thread UNC 1½ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/ work place limit of > 0.1 mg/m³). Observe the national regulations.

Suction rotor for dust extraction in dry drilling with connection for REMS Pull 2 and other suitable extractors, as accessory (page 311). REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 324).





German Quality Product



With speed regulation for the best drilling performance and maximum life of the drilling crowns.



REMS Simplex 2



REMS Titan

REMS Picus SR

Drilling start aid

Drilling start aid G $\frac{1}{2}$ UDKB, with bores for extracting the drilling dust from the bore hole by a suction rotor for dust extraction, with carbide masonry drill \emptyset 8 mm, as accessory.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 310).

Water extractor unit

Water extractor unit for wet drilling up to \emptyset 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer \emptyset 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.



REMS Picus SR Basic-Pack



REMS Picus SR Set Titan



REMS Picus SR Set 62-82-132 Titan

Supply format

REMS Picus SR Basic-Pack. For core drilling in concrete, steel-reinforced concrete $\leq \emptyset$ 162 (200) mm, masonry and other materials $\leq \emptyset$ 250 mm. For dry or wet drilling, hand held or with drill stand. Drive machine with drilling crown connection thread UNC 1½ male, G ½ female, maintenance-free 2-step gear with safety slip clutch, universal motor 230 V, 50 – 60 Hz, 2200 W. Stepless electronic speed regulation 250 rpm to 500 rpm (1st gear) or 600 rpm to 1200 rpm (2nd gear), overheating protection. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Water supply device with adjustable shut-off valve and quick coupling with water stop and ½" hose connection. Stabiliser. Spacer set. Single open ended wrench size 32. In sturdy steel case.

ArtNo.	€
183010R220	1.712,70

Other voltages on request.

Supply format

REMS Picus SR Set Titan. REMS Picus SR Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

€	ArtNo.		
3.093,24	183022 R220		

Other voltages on request.

Supply format

REMS Picus SR Set 62+82+132 Titan. REMS Picus SR Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete and REMS Universal diamond core drilling crowns UDKB \emptyset 62+82+132 mm.

ArtNo.	€
183023R220	3.581,10

Other voltages on request.

Accessories

Description	ArtNo.	€
REMS Picus SR drive unit	183000R220	1.328,64
Spacer set for additional stabilisation of the REMS Picus SR drive unit on the REMS Titan drill stand, consisting of spacer and 2 cylinder head screws M 8×65	183632R	48,58
Steel case with inlay	180600R	128,71

inductively soldered, resolderable, see page 312. **REMS universal diamond core drilling crowns LS,**

laser welded, high temperature-resistant, see page 314.

REMS Pull 2 L / M, dry and wet extractors, see page 324

Additional accessories see page 310-311.



Powerful. robust core drilling machine for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Dry or wet drilling with drill stand. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, masonry and other materials

Ø 40-300 mm

REMS Universal diamond core drilling crowns, also suitable for drive machines of other makes, see page 312 – 314.

REMS Picus S2/3,5 – Core drilling instead of chiselling. Easy, fast, vibration-free, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 2 min.

Universal use

Universal drive machine for dry or wet drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Extremely versatile and efficient, e.g. drilling in steel-reinforced concrete, masonry and other materials. For pipeline and cable ducting, ventilation channels, test core drilling.

System advantage

Only **one** type of universal diamond core drilling crowns for all REMS Picus drive machines and other suitable makes of drive machines. Therefore simple, low cost storage. No confusion possible.

Design

Compact, handy drive machine for vibration-free core drilling, with drilling crown connecting thread UNC 1½ male. Light loosening ring, for light loosening of the diamond core crowns. Compact, robust, suitable for the building site. Weight just 14.4 kg. Simple, fast work, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 2 min. Clamping plate for fast clamping to the drill stand. Water supply for wet drilling, with adjustable shut-off valve and quick coupling with water stop and hose connection ½".

Drive

Robust, powerful 3420 W universal motor. Stable, maintenance-free 2-speed gear for optimum selection of load speed according to the drilling diameter. Load speed drilling spindle 320 rpm, 760 rpm. Blocking protection by safety slip clutch. Rocker switch. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond core drilling crowns

Universally usable for dry and wet drilling, hand held or with drill stand. Optionally REMS Universal diamond core drilling crowns, inductively soldered, resolderable or REMS Universal diamond core drilling crowns LS, laser welded, high temperature-resistant (page 312–314). Connecting thread UNC 1½ female. Drilling depth 420 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry. Adapter for using the REMS Universal diamond core drilling crowns in drive machines of other makes, as accessory. Light loosening ring, for light loosening of the diamond core crown, as accessory.

Water extractor unit

Water extractor unit for wet drilling up to Ø 170 mm, consisting of a water collector ring with connection for REMS Pull 2 or other suitable wet extractors, compression ring, rubber washer Ø 200 mm, adaptable to diameter of the drill crown and universal pressure pad for all REMS drill stands, as accessory.

Drill stand REMS Titan

Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to Ø 300 mm. For high demands. Drill column made of rigid, unbendable square precision steel tube $\rlap/\,$ 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Continuously tiltable with degree scale up to 45°, with double support by adjustable, single-part steel girders, for maximum thrust pressure. Highly stable, 3-sided guidance of the drill column in the base plate and triple cross fastening for high rigidity in vertical drilling. 4 Eyebolts for levelling $unevenness\ of\ the\ floor,\ for\ exact\ standing\ position.\ Drill\ depth\ scale.\ Slide\ guided$ on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Rigid connection plate made of wear-resistant spheroidal iron. Quick-clamping device for accommodating drive units with a suitable connection plate. Highly stable clamping bracket, unbendable and rigid, for accommodating drive units with Ø 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack. Base plate with groove for sealing ring of the vacuum fastening. Vacuum fastening as accessory. Drill column with adjustable clamping head for clamping the drill stand between the ceiling and floor or between two walls. Mobile drill stand for easy transport. Weight 19.5 kg.

With tools, consisting of Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 \times 52, quick clamping nut, washer, carbide masonry drill Ø 15 mm SDS-plus, in box.











REMS Titan



REMS Picus S2/3,5 Basic-Pack

REMS Picus S2/3,5 Basic-Pack. Electric diamond core drilling machine for core drilling in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed, Ø 40–300 mm. For dry and wet drilling with drill stand. Drive machine with drilling crown connecting thread UNC 11/4 male, maintenance-free 2-speed gear with safety slip clutch, universal motor 230 V, 50-60 Hz, 3420 W. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Personal protection switch (PRCD). Load speed drilling spindle 320 rpm, 760 rpm. Water supply device with adjustable shut-off valve and quick coupling with water stop and hose connection $\frac{1}{2}$ ". Light loosening ring. Single open-ended wrench size 32. In a carton.

ArtNo.	€
180012R220	3.176,28

Other voltages on request.

Supply format

REMS Picus S2/3,5 Set Titan. REMS Picus SR/3.5 Basic-Pack with REMS Titan drilling stand including fastening kit for masonry and concrete.

 J	 J	 	,		
				ArtNo.	€
				180030R220	4.722,90

Other voltages on request.



REMS Picus S2/3,5 Set Titan

Accessories

Description

REMS Universal diamond core drilling crowns,

inductively soldered, resolderable, see page 312.

REMS universal diamond core drilling crowns LS,

laser welded, high temperature-resistant, see page 314.

 $\boldsymbol{\mathsf{REMS}}$ $\boldsymbol{\mathsf{Pull}}$ 2 L / M, dry and wet extractors, see page 324

Additional accessories see page 310 – 311.





Drill stands

Supply format

REMS Simplex 2. Robust, handy drilling stand for core drilling up to Ø 202 mm. Drill column made of rigid, unbendable square precision steel tube ₱ 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Drilling column guided in sturdy stand and double bolted for high rigidity during drilling. Steel section stand. 4 Set screws for levelling unevenness of the floor, for exact standing position. Clamping bracket for holding drive machines with clamping throat Ø 60 mm. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Stable clamping bracket, unbendable and rigid, for accommodating drive units with Ø 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack Weight 12 kg.

With tools comprising Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 \times 52, quick clamping nut, washer, carbide masonry drill Ø 15 mm SDS-plus in box.

For REMS Picus S1, REMS Picus S3, REMS Picus SR, REMS Picus DP and other makes.

ArtNo.	€
183700R	1.017,24



Supply format

REMS Titan. Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to \emptyset 300 mm. For high demands. Drill column made of rigid, unbendable square precision steel tube \$\psi\$ 50 mm, with extra narrow tolerance, for low-vibration guiding of the slide. Continuously tiltable with degree scale up to 45°, with double support by adjustable, single-part steel girders, for maximum thrust pressure. Highly stable, 3-sided guidance of the drill column in the base plate and triple cross fastening for high rigidity in vertical drilling. 4 Eyebolts for levelling unevenness of the floor, for exact standing position. Drill depth scale. Slide guided on all sides by adjustable, pretensioned plastic slide bearings. Precision in-feed drive ensures easy, low-vibration drilling and precise, low-vibration drill thrust. For high thrust pressure and long life of the drilling crowns. Spirit level integrated in the slide for exact alignment of the drill stand. Locking of the slide for simple assembly of the drilling crown and safe transport. Rigid connection plate made of wear-resistant spheroidal iron. Quick-clamping device for accommodating drive units with a suitable connection plate. Highly stable clamping bracket, unbendable and rigid, for accommodating drive units with Ø 60 mm clamping throat. Rack and pinion force transmission with ergonomically designed pressing lever which can be inserted in both sides of the slide. Wide steel rack. Base plate with groove for sealing ring of the vacuum fastening. Vacuum fastening as accessory. Drill column with adjustable clamping head for clamping the drill stand between the ceiling and floor or between two walls. Mobile drill stand for easy transport Weight 19.5 kg.

With tools comprising Allen key size 6, single open ended wrench size SW 19 and SW 30 and fastening kit for masonry and concrete, consisting of 2 M12 splaying anchors, 10 M12 hammer anchors for concrete, setting iron for M12 hammer anchors, cord threaded bar M12 \times 52, quick clamping nut, washer, carbide masonry drill \emptyset 15 mm SDS-plus in box.

System advantage: For REMS Picus S1, REMS Picus S3, REMS Picus SR, REMS Picus S2/3,5, REMS Picus DP and other makes. Use spacer set (see below) when using with REMS Picus SR.

Description	ArtNo.	€
Spacer set for additional stabilisation of the REMS Picus SR drive unit on the REMS Titan drill stand.		
consisting of spacer and 2 cylinder head screws M 8 × 65	183632R	48,58








1.546.62

Art.-No. 183600R

Accessories

ArtNo.	4
182006R	205,5
183605R	57,6
079018	28,1
	109,8
	16,0
	10,0
079019	63,4
U79006R10	102,7
079010	72,7
183607R	54,0
183603R	99,4
183670R220	1.909,9
183604R	129,7
180140R	91,9
079013	18,8
079003	38,3
180015	20,6
180155R	61,1
079012	64,6
182010R	75,2
180160R	173,3
1	
1837070	202 /
183606R	393,4
	182006R 183605R 079018 079005R50 182050R 079019 079006R10 183607R 183603R 183670R220 183604R 180140R 079013 079003 180015 180155R 079012 182010R

REMS Pull 2 L / M, dry and wet extractor, certified as extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69, see page 324

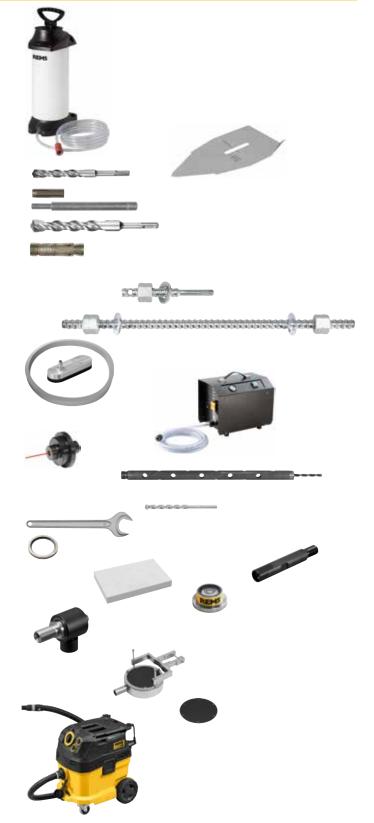

High quality universal diamond core drilling crowns. Inductively soldered. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other

Ø 32-300 mm

REMS Universal diamond core drilling crowns – Inductively soldered. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1% female. Drilling depth 420 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1% male. Adapter for using REMS Universal diamond core drilling crowns in drive machines having other connecting threads/other tool holders, as accessory.

Suck off dusts that occur during dry drilling with REMS Pull 2 M safety vacuum cleaner, certified for extracting health hazardous dusts of dust class M (page 324).

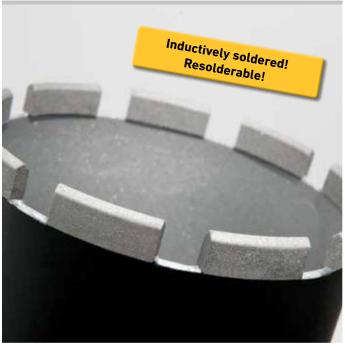







REMS Universal diamond core drilling crown. Inductively soldered, resolderable. Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1½ female. Drilling depth 420 mm. In a carton.

Dritting depth 420 mm. in a cartor	1.		
$\emptyset \times drilling depth \times connection$	Number of segments	ArtNo.	€
UDKB 32 × 420 × UNC 11/4	4	181010R	143,19
UDKB 42 × 420 × UNC 11/4	4	181015R	133,85
UDKB 52 × 420 × UNC 11/4	5	181020R	142,15
UDKB 62 × 420 × UNC 11/4	6	181025R	154,61
UDKB 72 × 420 × UNC 11/4	7	181030R	175,37
UDKB 82 × 420 × UNC 11/4	7	181035R	189,90
UDKB 92 × 420 × UNC 11/4	8	181040R	214,81
UDKB 102 × 420 × UNC 11/4	8	181045R	220,00
UDKB 112 × 420 × UNC 11/4	9	181050R	232,46
UDKB 122 × 420 × UNC 11/4	10	181055R	262,56
UDKB 127 × 420 × UNC 11/4	10	181059R	272,94
UDKB 132 × 420 × UNC 11/4	11	181060R	284,36
UDKB 152 × 420 × UNC 11/4	12	181065R	338,34
UDKB 162 × 420 × UNC 11/4	12	181070R	358,06
UDKB 182 × 420 × UNC 11/4	12	181075R	396,46
UDKB 200 × 420 × UNC 11/4	12	181080R	419,30
UDKB 225 × 420 × UNC 11/4	13	181085R	510,64
UDKB 250 × 420 × UNC 11/4	14	181090R	524,14
UDKB 300 × 420 × UNC 11/4	22	181095R	686,07





Accessories

Description	ArtNo.	€
Light loosening ring, for light loosening		
of the diamond core crown	180015	20,66
Drilling crown extension 200 mm	180155R	61,19
Adapter UNC 1¼ male to G ½ male	180052	31,45
Adapter UNC 1¼ male to G ½ female	180056	28,55
Adapter UNC 1¼ male for Hilti BI, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BI tool holder.	180053	48,27
Adapter UNC 1¼ male for Hilti BU, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BU tool holder.	180054	111,07
Adapter UNC 1½ male for Hilti BL, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BL tool holder.	180057R	111,07
Sharpening stone for diamond core drilling crowns	079012	64,67
Single open ended wrench size 41 for UDKB	079003	38,35
Additional adapters for using REMS Universal diamond	core drilling cr	OWNE

 $\label{lem:conditional} Additional adapters for using REMS Universal diamond core drilling crowns in drive machines of other makes, on request.$



High quality universal diamond core drilling crowns. Laser welded. Universally usable for dry and wet drilling, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material. For installation, metalwork, industry.

Concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed and other

Ø 32-200 mm

REMS universal diamond core drilling crowns LS – laser welded. Diamond segments with conical cut for fast, easy and quiet drilling. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, for dry and wet drilling, hand held or with drill stand.

Single connecting thread UNC 1% female. Drilling depth 420 mm.


Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with conical cut ("roof shape") for fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory.

Drive through all REMS Picus drive machines and suitable drive machines of other makes having connecting thread UNC 1½ male. Adapter for using REMS Universal diamond core drilling crowns in drive machines having other connecting threads/other tool holders, as accessory.

Suck off dusts that occur during dry drilling with REMS Pull 2 M safety vacuum cleaner, certified for extracting health hazardous dusts of dust class M (page 324).

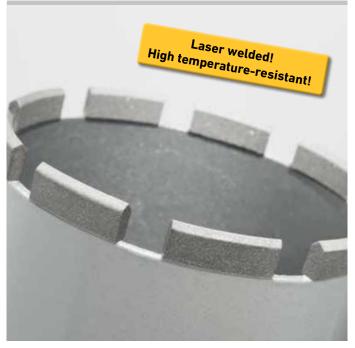







REMS Universal diamond core drilling crown. Laser welded! High temperature-resistant! Universally usable for dry and wet drilling, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1½ female. Drilling depth 420 mm. In a carton.

		_
Number of segments	ArtNo.	€
1	181410R	157,72
4	181415R	147,34
5	181420R	156,69
6	181425R	170,18
6	181430R	193,02
7	181435R	209,62
8	181440R	236,61
9	181445R	242,84
9	181450R	256,33
10	181455R	289,55
10	181459R	300,97
10	181460R	313,42
11	181465R	372,59
12	181470R	394,39
13	181475R	476,39
14	181480R	503,38
	5 6 6 7 8 9 9 10 10 10 11 11 12	1 181410R 4 181415R 5 181420R 6 181425R 6 181425R 6 181430R 7 181435R 8 181440R 9 181445R 9 181450R 10 181455R 10 181457R 10 181457R 11 181465R 12 181470R 13 181475R





Accessories

Description	ArtNo.	€
Light loosening ring, for light loosening		
of the diamond core crown	180015	20,66
Drilling crown extension 200 mm	180155R	61,19
Adapter UNC 1¼ male to G ½ male	180052	31,45
Adapter UNC 1¼ male to G ½ female	180056	28,55
Adapter UNC 1¼ male for Hilti BI, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BI tool holder.	180053	48,27
Adapter UNC 1½ male for Hilti BU, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BU tool holder.	180054	111,07
Adapter UNC 1½ male for Hilti BL, adapter for using the REMS universal diamond core drilling crowns in Hilti drive machines with BL tool holder.	180057R	111,07
Sharpening stone for diamond core drilling crowns	079012	64,67
Single open ended wrench size 41 for UDKB	079003	38.35

 $\label{lem:conditional} Additional adapters for using REMS Universal diamond core drilling crowns in drive machines of other makes, on request.$



REMS Picus DP

Compact, handy power tool for core drilling, e.g. in concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. With micropulse technology. Especially for dry drilling, hand held or with drill stand. For trade and industry.

Concrete, steel-reinforced concrete $\leq \emptyset$ 162 (202) mm Masonry and other materials $\leq \emptyset$ 202 mm

REMS dry diamond core drilling crowns, also suitable for drive machines of other makes, see page 319.

REMS Picus DP – with micro-pulse technology For core drilling without water. Clean, easy, fast, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 5 min.

Especially for dry drilling

Drive machine with micro-pulse technology, specially developed for dry drilling, hand held or with drill stand. Can be used anywhere, in narrow angles, flush with the wall. Suitable for many, especially hard materials. For pipeline and cable ducting, ventilation channels, test core drilling. In combination with the REMS Pull 2 M vacuum cleaner, ideal for making core bores in finished rooms, e.g. in residential, office and industrial buildings.

Design

Compact, handy drive machine for low-vibration core drilling, with drilling crown connecting thread UNC 1½ male, BSPP ½ female. Compact drive unit for low-vibration core drilling, with drilling crown connecting thread UNC 1½ outside, G½ inside. Micro-pulse technology can be switched on and off: Pulse disc with 24 teeth generates 28,800 pulses min¹ in idle mode at 1,200 min¹, under load at 880 min¹ 21,120 pulses min¹. Robust, suitable for the building site. Extra light, only 7 kg. Simple, fast work without water, e.g. 200 mm in steel-reinforced concrete Ø 62 mm in only 5 min. Practical spade handle and stabiliser for hand held drilling. Integrated suction rotor for dust extraction with connection for REMS Pull 2 M and other suitable vacuum cleaners. Throat Ø 60 mm for holding the drive machine in the drill stand.

Drive

Robust, powerful 2200 W universal motor. Load speed drilling spindle 8080 rpm. Stable, maintenance-free gear. Blocking protection by safety slip clutch. Tip switch with lock. Connecting cable with integrated personal protection switch (PRCD).

Multifunction electronics

Multifunction electronics with start-up current limiting for soft starting for delicate drilling start, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Dry diamond core drilling crowns LS

Especially for dry drilling with core drilling machines with micro-pulse technology, laser welded, high temperature-resistant (page 319), for drilling without water, hand held or with drill stand. Connecting thread UNC 1½ female. Drilling depth 320 mm. Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very longifie. Ideal for dry drilling in steel-reinforced concrete and masonry. Light loosening ring, for light loosening of the dry diamond core drilling crown, as accessory.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/ work place limit of > 0.1 $\,\mathrm{mg/m^3}$). Observe the national regulations.

Use REMS Pull 2 M for high-performance extraction of drilling dusts from the drilling gap during dry drilling (page 324). The REMS Pull 2 M safety vacuum cleaner is certified for extracting health hazardous dusts of dust class M.

Drilling start aid

Drilling start aid G $\frac{1}{2}$ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill \emptyset 8 mm.

Drill stand

REMS Simplex 2 or REMS Titan drill stands can be used optionally (page 318).





German Quality Product



REMS Simplex 2

REMS Titan



REMS Picus DP Basic-Pack. Electric diamond core drilling machine with micro $pulse\ technology\ for\ core\ drilling\ without\ water\ in\ concrete,\ steel-reinforced$ concrete $\leq \emptyset$ 162 (202) mm, masonry and other materials $\leq \emptyset$ 202 mm, hand held or with drill stand. Drive unit with drilling crown male connection thread UNC 1%, female connection thread G $\frac{1}{2}$, maintenance-free gear with safety slip clutch, 110 V / 230 V, 50 – 60 Hz, 2200 W universal motor, integrated dust extraction. Multifunction electronics with soft starting, idle speed limiting, overload protection, blocking protection. Touch switch with lock. Load speed drilling spindle 880 rpm. Stabiliser. Drill start aid G $1\!\!/_{\!2}$ TDKB with Ø 8 mm drill, size 3 Allen key. Size 32 opened ended wrench. In sturdy steel case.

€	ArtNo.	
2.584,62	180016 R220	

Other voltages on request.

Supply format

REMS Picus DP Set Simplex 2. REMS Picus DP Basic-Pack with REMS Simplex 2drilling stand including tools and fastening kit for masonry and concrete.

l de la companya de la companya de la companya de la companya de la companya de la companya de la companya de	ArtNo.	€
11	80033R220	3.601,86

Other voltages on request.

Supply format

REMS Picus DP Set Titan. REMS Picus DP Basic-Pack with REMS Titan drilling

	stand including tools and fastening kit for masonry and concrete.		
€	ArtNo.		
4.131,24	180035R220		

Other voltages on request.

Supply format

REMS Picus DP/Pull 2 M Set-Pack. REMS Picus DP Basic-Pack, Art.-No. 180016 R110G, and REMS Pull 2 M Set, Art.-No. 185601 R220G.

74 t. 140. 100010 1(1100, dila 1(2)40 1 dil 2 14 30t, 74 t. 140. 100001 1(2200.		
	ArtNo.	€
	180036 R220	3.652,72

Other voltages on request.



REMS Picus DP Set Titan



REMS Picus DP/Pull 2 M Set-Pack

Accessories

ArtNo.	€
180003R220	2.532,72
180600R	128,71
	180003R220

laser welded, high temperature-resistant, see page 319.

REMS Pull 2 M, dry and wet extractor, see page 324

Additional accessories see page 318.





Description	ArtNo.	€
Jeser provi		, and the second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second second
REMS Simplex 2. Robust, handy drilling stand for core drilling up to Ø 202 mm. Description see page 310.	183700R	1.017,24
REMS Titan. Robust, highly stable drilling stand for core drilling in steel-reinforced concrete and other materials up to Ø 300 mm. For high demands. Description see		
page 310.	183600R	1.546,62
Titan drilling template for easy setting of the fastening holes. For REMS Titan drilling stand.	183605R	57,61
Carbide masonry drills Ø 15 mm SDS-plus for hammer anchors M12	079018	28,13
Hammer anchor M12 (pack of 50), for concrete	079005R50	109,82
Setting iron for hammer anchor M12	182050R	16,09
Carbide masonry drill Ø 20 mm SDS-plus for splaying anchors M12	079019	63,42
Splaying anchor M12 (pack of 10), for masonry, reusable	079006R10	102,76
Quick clamping set 160 for fastening the drilling stand		
with anchors, consisting of cord threaded bar 160 mm with M12 × 52 thread, quick clamping nut, washer.	079010	72,76
Quick clamping set 500 for fastening the drilling stand without anchor, consisting of cord threaded bar 500 mm,		
2 quick clamping nuts, 2 washers	183607R	54,08
Titan vacuum fastening, consisting of cover plate with nipple for 3/8" screw connection and sealing ring for base plate.	183603R	99.44
for base plate. Vacuum pump, for vacuum ≤ -900 mbar (90%), consisting of dry running rotary slide pump, oil-free, performance 6 m3/h, condenser motor 230 V, 50-60 Hz, 250 W, splash water-protected, inside	IOJUJR	1.909,92
suction filter with silencer function and 5 m PVC fabric hose with bayonet coupling.	183670R220	1./0/,/2
	183670R220 183604R	
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide	183604R	129,75
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm	183604R 180145R	129,75 91,97
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm Carbide masonry drill Ø 8 mm for drilling aid	183604R	129,75 91,97
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm Carbide masonry drill Ø 8 mm for drilling aid Single open ended wrench size 41 for loosening the universal diamond core drilling crowns	183604R 180145R	129,75 91,97
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm Carbide masonry drill Ø 8 mm for drilling aid Single open ended wrench size 41 for loosening the universal diamond core drilling crowns Light loosening ring, for light loosening	183604R 180145R 079013	91,97 18,89 38,35
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm Carbide masonry drill Ø 8 mm for drilling aid Single open ended wrench size 41 for loosening the universal diamond core drilling crowns	183604R 180145R 079013 079003	91,97 18,89
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm Carbide masonry drill Ø 8 mm for drilling aid Single open ended wrench size 41 for loosening the universal diamond core drilling crowns Light loosening ring, for light loosening of the diamond core crown Drilling crown extension 200 mm Sharpening stone for diamond core drilling crowns	183604R 180145R 079013 079003	91,97 18,89 38,35 20,66
fabric hose with bayonet coupling. Laser drilling centre pointer Drilling start aid G ½ TDKB, with bores for extracting the drilling dust from the bore hole, with carbide masonry drill Ø 8 mm Carbide masonry drill Ø 8 mm for drilling aid Single open ended wrench size 41 for loosening the universal diamond core drilling crowns Light loosening ring, for light loosening of the diamond core crown Drilling crown extension 200 mm	183604R 180145R 079013 079003 180015 180155R	91,97 91,97 18,89 38,35 20,66 61,19

REMS Pull 2 M, dry and wet extractor, certified as extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69, see page 324



318

High quality dry diamond core drilling crowns. Laser welded. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, hand held or with drill stand. Ideal for universal applications in steel-reinforced concrete, masonry and many types of material.

Concrete, steel-reinforced concrete, aggregate concrete, brick, clinker, all kinds of masonry, natural stone, asphalt, all kinds of screed and other \emptyset 32 – 202 mm

REMS dry diamond core drilling crowns LS — Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology. Versatile for many types of material. Ideal for plumbers.

Universally usable for many materials, hand held or with drill stand. Single connecting thread UNC 1% female. Drilling depth 320 mm.

Specially developed, high quality diamond segments with high diamond percentage and special bonding, for excellent drilling performance and very long life. Ideal for universal applications in steel-reinforced concrete and masonry.

Diamond segments with diamonds positioned in the bonding agent. For fast, easy and quiet drilling. Inductively soldered on fully automatic soldering machines for constant high quality of the soldered connection. Drilling tubes with soldered diamond segments can be resoldered by simple hard soldering.

Light loosening ring, for light loosening of the diamond core crowns, as accessory. Driven by a REMS Picus DP drive unit and suitable drive units of other makes with UNC 1½ outer connecting thread.

Use REMS Pull 2 M for high-performance extraction of drilling dusts from the drilling gap during dry drilling (page 324). The REMS Pull 2 M safety vacuum cleaner is certified for extracting health hazardous dusts of dust class M.









Supply format

REMS dry diamond core drilling crowns LS. Laser welded, high temperature-resistant. Especially for dry drilling with core drilling machines with micro-pulse technology, e.g. REMS Picus DP, hand held or with drill stand. For many materials, e.g. concrete, steel-reinforced concrete, all kinds of masonry, natural stone, asphalt, all kinds of screed. Connecting thread UNC 1½ female. Drilling depth 320 mm. In a carton.

Number of segments	ArtNo.	€
3	181500R	172,26
4	181502R	160,84
5	181504R	171,22
5	181506R	186,79
6	181508R	211,70
6	181510R	229,35
6	181512R	258,41
7	181514R	264,64
7	181516R	279,17
8	181532R	320,69
8	181518R	332,11
8	181520R	341,45
8	181522R	365,32
8	181524R	406,84
9	181526R	431,76
9	181528R	476,39
10	181530R	504,42
	3 4 5 5 6 6 6 7 7 7 8 8 8 8 8 9	3 181500R 4 181502R 5 181504R 5 181504R 6 181508R 6 181510R 6 181512R 7 181514R 7 181516R 8 181532R 8 181520R 8 181520R 8 181520R 8 181522R 9 181526R 9 181528R





Accessories

Description	ArtNo.	€
Light loosening ring, for light loosening of the diamond core crown	180015	20,66
Drilling crown extension 200 mm	180155R	61,19
Sharpening stone for diamond core drilling crowns	079012	64,67
Single open ended wrench size 41 for UDKB	079003	38,35

Additional adapters for using REMS dry diamond core drilling crowns LS in drive machines of other makes, on request.



Diamond tipped dry drilling crowns for fast, clean drilling in all kinds of tiles. Ideal for assembly and renovation.

Ceramic, fine clay, granite, marble etc.

REMS tile drilling – for dry drilling.

Can be used universally for dry drilling without hammering in ceramic, fine clay, granite, marble and other materials. No cracking of the tiles.

No water necessary.

Special wax filling inside the dry drilling crown as a cooling lubricant, becomes liquid when heated and cools the dry drilling crown.

Simple, free-hand starting by drill aid with vacuum fastening. Hexagon connection for $1\!\!4"$ bit holders.

Drive by cordless REMS Helix 22 V VE power drill (page 108) and other electric drills/screwdrivers (speed \geq 1,000 rpm).







REMS tile drilling Set 6+8+10. Diamond-studded dry drilling crowns with special wax filling. For ceramic, fine clay, granite, marble and other materials. Tile drilling Ø 6, 8, 10 mm, drill aid with vacuum fastening. In blister pack.

paom	thing 2 of of 10 mini, and and mini racadim racioning in blicio.
€	ArtNo.
206,56	181700R



Accessories

Description	ArtNo.	€
REMS tile drilling Ø 5 mm	181710 R	50,81
REMS tile drilling Ø 6 mm	181711 R	50,81
REMS tile drilling Ø 8 mm	181712 R	51,85
REMS tile drilling Ø 10 mm	181713R	52,89
REMS tile drilling Ø 12 mm	181714R	57,04
REMS tile drilling Ø 14 mm	181715R	82,99
PEMS Haliv 22V VE cordless drill/screwd	river see page 108	





Compact, handy power tool for dry chasing and cutting, e.g. of concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. For trade and industry.

Chase depth \leq 61 mm Chase width \leq 62 mm Number of diamond cutting discs 1-3

REMS Universal diamond cutting discs, also for suitable drive machines of other makes, see page 323.

REMS Krokodil 180 SR – chasing instead of chiselling. Full contact support plate. Multi-function electronics.

Universal use

Universal drive machine for dry chasing and cutting. Ideal for producing chases/grooves for laying pipes and electric cables in heating, sanitary and electrical installation, air-conditioning and cooling technology.

Design

Compact, handy drive machine, only 8.0 kg. Robust, suitable for building site conditions. Fast, easy working, e.g. chases in masonry 500 mm long, 61 mm deep, only 34 s. Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamond cutting discs, dust-free, safe working and easy, even feed. Practical switch handle with triple force-transmitting leverage for easy plunge-in and effective feeding. Swivel handle, for optimum working position and ergonomic work. Locking of the drive shaft for easy changing of the universal diamond cutting discs. Spacer discs of different thicknesses according to desired chase width screws to the cutting discs in a stable block, ensure an even chase width. Continuously adjustable depth stop. Suction nozzle for connecting a dust extractor integrated into the housing.

Drive

Robust, powerful universal motor, 2,000 W. Load speed of the drive shaft of the cutting discs 3,300 rpm. Overheating protection by temperature monitoring of the motor's field winding with a PTC resistor (Positive Temperature Coefficient). Strong, maintenance-free gear. Connecting cable 5.7 m. Safety switch with lock. Restart protection in case of mains failure.

Speed Regulation

The electronic tachometer speed control used for regulation keeps the speed constant, also under load. The speed of the cutting disc is kept at the nominal value until it meets with resistance and drops below a critical value. The drive motor stops. When the load on the drive unit is relieved again, the drill runs back up to nominal speed so that work can continue immediately at nominal speed (Patent EP 2 085 191). Advantage: The chasing and cutting speed (load speed) is maintained during the entire chasing and cutting process for a high chasing and cutting performance.

Multi-function electronics

Multifunction electronics with start-up current limiting for soft starting for delicate engagement of the diamond cutting discs, automatic idle speed limiting for noise reduction and preservation of the motor, overload and blocking protection for motor and gear.

Universal diamond cutting discs

Universally usable for straight chasing and cutting. Specially developed, high quality diamond segments with high diamond content and special bonding for excellent chasing/drilling performance and very long life. Optionally REMS Universal diamond cutting discs LS Turbo, laser-welded, high temperature-resistant, for fast cuts and cuts in hard materials or REMS Universal diamond cutting discs LS H-P, high-performance, laser-welded, high temperature-resistant, for fast cuts and cuts in very hard materials, with long life (page 323), metal body in accordance with EN 13236. Mounting bore Ø 22.23 mm.

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/ work place limit of $> 0.1 \text{ mg/m}^3$). Observe the national regulations. REMS Pull 2 M, wet and dry dust extractor, certified for extracting health hazardous dusts of dust class M (page 324).







Full contact support plate during the entire chasing/cutting process for guided plunge-in of the diamondcutting discs, dust-free, safe working and easy, even feed.

REMS Krokodil 180 SR Basic-Pack. Electric diamond chasing and cutting grinder with speed regulation. For chasing and cutting concrete, steel-reinforced concrete, all kinds of masonry, natural stone, all kinds of screed. Chase depth 61 mm, continuously adjustable. Chase width ≤ 62 mm, stepped with spacer discs 3, 6, 10, 20 mm. Drive machine with drive shaft Ø 22.2 mm, for 1, 2 or 3 diamond cutting discs in accordance with EN 13236, \leq Ø 180 mm, with maintenance-free gear, 230 V, 50 – 60 Hz, 2,000 W universal motor. Multifunction electronics with soft start, idling speed limiting, overload protection, overheating protection. Restart protection in case of mains failure. Connecting cable 5.7 m. Safety switch with lock. Load speed 3,300 rpm. Suction nozzle for connecting an extractor/dust extractor. Pin wrench size 13. In sturdy steel case.

A	ArtNo.	€
18	35011 R220	1.235,22

Other voltages on request.



Accessories

ArtNo.	€
185001 R220	1.183,32
185026R	58,65
185027 R	93,84
185024R	25,22
185058R	110.03
	185027R 185024R



Powerful, electric dry and wet extractor with automatic filter cleaning. For commercial use in trade and industry.

For extraction of dusts, dirt and liquids.

Ideal for dust extracting when chasing, cutting, drilling, core drilling and grinding.

Certified as extractor and dust extractor for extracting health hazardous dusts.

Ideal for extracting drilling sludge during core drilling.

REMS Pull 2 L

Dust class in accordance with EN 60335-2-69 L Exposure limit/work place limit $> 1 \text{ mg/m}^3$ Penetration level $\leq 0.1 \%$

REMS Pull 2 M

Dust class in accordance with EN 60335-2-69 M Exposure limit/work place limit $> 0.1 \text{ mg/m}^3$ Penetration level $\leq 0.1 \%$

REMS Pull 2 – for dry and wet suction.

Constantly high suction performance
by permanent automatic filter cleaning.

Certified for extracting health hazardous dusts.

Universal use

Powerful, handy extractor for dry and wet suction. For extraction of dusts, dirt and liquids. Excellently suited for dust extracting when chasing, cutting, drilling, core drilling and grinding. Certified as an extractor and dust extractor for extracting health hazardous dusts of dust class L or M in accordance with EN 60335-2-69. For commercial use in trade and industry.

Design

Compact, handy design. REMS Pull 2 L only 13.5 kg, REMS Pull 2 M only 14.2 kg. Light and manoeuvrable by rubber wheels and steerable castors, lockable by castor with brake Large tank capacity 31 l, filling volume for liquids 17 l. On/Off switch with selection without filter cleaning or with filter cleaning with a 15 s or 60 s cycle. Adapter for connecting a power tool to the vacuum cleaner. Flexible 4 m, electrically conductive suction hose (Pull M), ergonomically angled handle, 2 pluggable, chrome-plated metal suction pipes 0.5 m for adapting the suction pipe length. Wide wet/dry surface attachment 300 mm with rubber-coated castors, optionally brush strips for extracting dusts and dirt or rubber lips for extracting liquids. Joint attachment for confined spaces. Large working radius by long 7.5 m connecting lead. Holders for connecting lead, suction hose, metal suction tubes and accessories integrated into the extractor. Practical handle for easy transport. Integrated fittings for fixing a REMS L-Boxx system case.

REMS Pull 2 M is suitable and certified for the extraction of health hazardous dusts of dust class M in accordance with EN 60335-2-69, with electronic volume flow monitoring, selector switch for adapting the suction power to different suction hose diameters (21, 27, 32, 35, 40 mm) and stopper for the suction hose connection nozzle

Permanent automatic filter cleaning

REMS Pull 2 L and REMS Pull 2 M with innovative, patented, automatic filter cleaning, prevents clogging of the filter with dust, especially effective in fine dust applications. The flat pleated filter is cleaned automatically by targeted, powerful shots of air every 15 s or 60 s depending on the setting. The suction force remains constantly high during cleaning. Patented flat folded filter system.

Drive

Robust, powerful bypass motor, 1,200 W, with high-power turbine. High suction power, continuously adjustable up to an air rate \leq 143 m³/h, for optimum adaptation to the suction surface and the extracted product.

Automatic switch-off

Filling level limiting with automatic switch off on reaching the maximum liquid filling level when extracting electrically conductive liquids.

Automatic power tool on/off

Appliance socket for power tools up to 2,200 W, with electronic automatic on/off integrated into the extractor. The extractor switches on/off automatically when the power tool is switched on/off. For convenient working.

Anti-static system (REMS Pull 2 M)

Static charge is dissipated to the earthed upper section of the extractor by electrically conductive metal suction pipes, electrically conductive handle E, electrically conductive suction hose E and electrically conductive suction hose connection nozzle.







Certified extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335-2-69.



Extraction of health hazardous dusts when chasing and cutting: REMS Pull 2 M Set



Extraction of health hazardous dusts when dry drilling: REMS Pull 2 M Set D

Dust extraction in accordance with EN 60335-2-69

When working with mineral building materials, e.g. concrete, steel-reinforced concrete, masonry and screed, a high degree of mineral dust containing quartz is produced which is harmful to the health. Inhalation of quartz fine dust is harmful to the health. EN 60335-2-69 prescribes the use of at least one safety extractor of dust class M for the extraction of health hazardous dusts with an exposure limit/ work place limit of > 0.1 mg/m³. Observe the national regulations.

Water extraction

PES flat folded filter required for extraction of water. Use wet filter bag or polythene bag if necessary. Wet filter bags separate the water from the sucked up solids when extracting dirty water. Polythene bags simplify disposal of the dirt and prevent dirt from collecting in the tank.



Supply format

REMS Pull 2 Set. Electric dry and wet extractor for commercial use. For extraction of dusts, dirt and liquids. Ideal for dust extracting when chasing, cutting, drilling, core drilling and grinding. Certified extractor and dust extractor for extracting health hazardous dusts in accordance with EN 60335–2-691. Bypass motor 230 V, 50–60 Hz, 1,200 W. On/Off switch with selection for automatic filter cleaning. Suction power switch for continuous adjustment of the air flow ≤ 143 m³/h. Filling level limiting with automatic switch-off for wet suction. Automatic filter cleaning. Appliance socket for power tools up to 2,200 W, with electronic automatic on/off. Large tank capacity 31 I, filling volume for liquids 17 I. Mobile, 2 wheels, castor/castor with brake. Connecting cable 7.5 m. 1 felt filter bag, 1 flat pleated filter PES. Flat suction attachment wet/dry 300 mm with rollers, brush strips, rubber lips. Joint attachment. Pull 2 suction hose/power tool adapter. Integrated holders for connecting cable, suction hose and accessories. In a box.

Description	Version	ArtNo.	€
Pull 2 L Set	Dust class L. Exposure limit/work place limit > 1 mg/m³, penetration level ≤ 0.1 %, 2 metal suction pipes 0.5 m each, handle, 4 m suction hose, suction hose connection nozzle.	185600 R220	798,22
Pull 2 L Set W	REMS Pull 2 L set with water suction device. Ideal for extraction of drilling sludge when wet drilling with REMS drill stands.	185603R220	1.191,62
Pull 2 M Set	Dust class M. Exposure limit/work place limit > 0.1 mg/m³, penetration level ≤ 0.1 %. Electronic volume flow monitor with acoustic signal. Selector switch for suction hose diameter. Stopper for the suction hose connection nozzle. Antistatic system with 2 electrically conductive metal suction pipes 0.5 m each, E handle, 4 m E suction hose, suction hose connection nozzle. 1 polythene bag.	185601 R220	1.068,10
Pull 2 M Set D	REMS Pull 2 M Set including suction rotor for dust extraction. Ideal for extracting health hazardous dusts when dry drilling with REMS Picus S1, Picus SR, Picus S3 etc.	185604R220	1.241,45





MMAAIM

Safety extractor of dust class M

REMS Pull 2 M Set


Accessories

Description	ArtNo.	€
Felt filter bag (pack of 5), polyester felt, 3-ply, tear-proof, for wet and dry extraction, M-certified, for normal dirt, fine dusts, abrasive dusts, wet dirt	185511 R05	56,26
Wet filter bag (pack of 5), paper-polyester woven felt, tear-proof, for wet and dry extraction, for abrasive dusts, wet dirt, liquids	185512R05	93,94
Polythene bag (pack of 10), for wet and dry extraction of non-health hazardous dusts, for normal dirt, fine dusts, abrasive dusts, wet dirt, liquids. Prevents soiling of the tank.	185513R10	52,83
Flat folded filter PES, polyester, nano-coated, 1 piece, water-resistant, non-rotting, washable with water. For wet and dry extraction, M-certified	185515R01	85,01
Suction rotor for dust extraction see page 311	180160R	173,35
Water suction device see page 311	183606R	393,40
Adapter suction hose/power tool, for connecting a power tool to the extractor	185654R	63,94





Drying Dehumidifying Aeration and deaeration

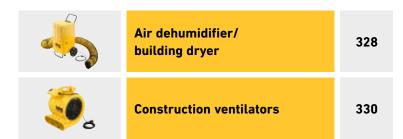

Powerful, highly efficient air dehumidifiers/building driers for drying rooms, e.g. after mains water damage, flooding, dehumidification of damp cellar rooms etc. and for fast drying of concrete, masonry, plaster and screed for example. For commercial use in trade and industry.

≤ 50 l/24 h
$\leq 265 \mathrm{m}^3/\mathrm{h}$
≤ 80 l/24 h
$\leq 850 \mathrm{m}^3/\mathrm{h}$

REMS Secco – for drying and dehumidification.

Universal use

Powerful, highly efficient air dehumidifiers/building driers for drying rooms, e.g. after mains water damage, flooding, dehumidification of damp cellar rooms etc. and for fast drying of concrete, masonry, plaster and screed for example. For commercial use in trade and industry.

Design Secco 50

Compact, handy construction in robust, plastic housing. Weight 21 kg. Large air extraction areas with washable air filter. Electronic hygrostat for regulating the desired humidity: Switches off automatically on reaching the nominal humidity, switches back on automatically when humidity rises. Upward air outlet for optimum air circulation. Condensation draining into an internal 7.71 condensation tank, hose extendible from the rear, for draining condensation into a tank to be provided or directly into the drain system. Automatic switch-off with switch-off signal when using the internal 7.7 litre condensation tank on reaching the maximum condensation filling level. Operating hours counter and electricity meter, e.g. for reporting to the damage regulator/customer, as an accessory. Sturdy plastic housing with castors for easy transport.

Design Secco 80

Compact, handy construction in robust, powder-coated sheet steel housing. Weight 51 kg. Large air extraction areas with washable air filter. Electronic hygrostat for regulating the desired humidity: Switches off automatically on reaching the nominal humidity, switches back on automatically when humidity rises. Side air outlet for optimum air circulation. Hose for draining condensation into an internal 11.5 l condensation tank (accessory), extendible at the side, for draining condensation into a tank to be provided or directly into the drain system. On/Off switch for operation with and without internal 11.5 litre condensation tank. Automatic switch-off with switch-off signal when using the internal 11.5 litre condensation tank on reaching the maximum condensation filling level. Operating hours counter and electricity meter, e.g. for reporting to the damage regulator/customer. Device socket for detachable connecting cable. Practical compartment for the connecting cable during transport. Sturdy, mobile tubular steel frame with large castors for easy transport, also over steps. Easy glide down and pull-up of the machine over the back of the tubular steel frame, e.g. from and onto the loading platform of a vehicle.

Chiller unit Secco 50

High dehumidification rate by high quality chiller unit with highly efficient rotation compressor and high-performance capacitor motor 230 V, 760 W with electronic thawing system, for continuous operation. Very quiet running, also suitable for living rooms. Dehumidification rate $\leq 501/24$ h, air volume ≤ 265 m³/h. High quality coolant R-290.

Chiller unit Secco 80

High dehumidification rate by high quality chiller unit with highly efficient rotation compressor and high-performance condensation motor 230 V, 680 W with automatic hot-gas thawing system, for continuous operation. Very quiet running, also suitable for living rooms. Dehumidification rate $\leq 80\,\text{l/24}\,\text{h}$, air volume $\leq 850\,\text{m}^3/\text{h}$. High quality coolant R-290.

Electronic control unit Secco 50

Large, illuminated control panel with clear display of actual and nominal humidity, operating state of the childer unit, thawing function. Keys for setting the desired humidity in $5\,\%$ steps between $30\,\%$ and $90\,\%$ as well as for setting the continuous operation. Keys for 2 fan speeds. Key for timer. Memory function saves the settings for automatic continuation of operation after a power failure.

Electronic control unit Secco 80

Illuminated 3" display with LCD technology, 70 mm screen diagonal, with clear display of actual and nominal humidity, operating hours, operating state of the chiller unit, the thawing function, the compressor protection function and the operating position for internal 11.5 litre condensation tank. Keys for setting the desired humidity in 1 % steps between 30 % and 90 % as well as for setting the continuous operation. Memory function saves the settings for automatic continuation of operation after a power failure.

Condensation tank with pump Secco 50 and Secco 80

Condensation tank with condensation pump for pumping the condensation out of the condensation tank into a higher tank or a wash basin, as an accessory.











Exhaust air set Secco 80

Generously dimensioned exhaust air hose \emptyset 200 mm, 10 m long, with metal fastening eyes for hanging up on site, with connecting flange, for distribution of the exhaust air in the room, for dehumidifying cavities, e.g. above intermediate ceilings and for additional blowing of wet surfaces (accessory).

RFMS Orkan

For supporting electric dehumidifiers/construction driers. For faster drying and dehumidification after floods and water mains damage, it is an advantage to improve the air exchange with electric construction ventilators REMS Orkan (page 330).

Supply format

REMS Secco 50 Set. Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and capacitor motor 230 V, 50 Hz, 760 W, with automatic thawing system, for continuous operation. Very quiet running. Dehumidification rate $\leq 501/24\,h$, air volume $\leq 265\,m^3/h$. Electronic control unit with large, illuminated display and memory function. Electronic humidity switch. Air filter. Internal 7.7 Loondensation tank. In sturdy plastic housing with casters. In a carton.

€	ArtNo.	
777,46	132011R220	

Other voltages on request.



REMS Secco 80 Set. Electric air dehumidifier/building dryer for commercial use. For drying rooms, dehumidifying cellars etc. and drying concrete, masonry, plaster and screed. Chiller unit with rotation compressor and capacitor motor 230 V, 50 Hz, 680 W, with automatic hot-gas thawing system, for continuous operation. Very quiet running. Dehumidification rate $\leq 801/24\,h$, air volume $\leq 850\,m^3/h$. Electronic control unit with illuminated 3" display and memory function. Electronic hygrostat, operating hours counter, electricity meter. Air filter. In a sturdy sheet steel housing on a mobile tubular steel frame with large castors. In a carton.

€	ArtNo.	
2.169,42	132010 R220	

Other voltages on request.

Accessories

Description	ArtNo.	€
11.5 litre condensation tank Secco 80 for discharge of condensation in the sheet steel housing. For REMS Secco 80.	132100R	53,35
Exhaust air set Secco 80, consisting of exhaust air hose Ø 200 mm, 10 m long, with metal fastening eyes for hanging up on site, with connecting flange, for distribution of the exhaust air in the room, for dehumidifying cavities, e.g. above intermediate ceilings and for additional blowing of wet surfaces.	132104R	318,67
Condensation tank with Secco 50 pump for pumping the condensation out of the condensation tank into a higher tank or a wash basin. Pumping height ≤ 2 m. For REMS Secco 50.	132129 R220	389,25
Condensation tank with Secco 80 pump for pumping the condensation out of the condensation tank into a higher tank or a wash basin. Pumping height ≤ 2 m. For REMS Secco 80.	132121R220	389,25
Operating hours counter and electricity meter, e.g. for reporting to the damage regulator/customer. For REMS Secco 50 and others.	132132R220	54,81
REMS Detect W, dielectric moisture measuring device for non-destructive moisture measurement in building materials, e.g. concrete, masonry, plaster, wood. In a case.	132115R	233,55
REMS Orkan, electric construction ventilator, see page 33	30.	







All prices excl. VAT 329

Powerful, highly efficient electric construction ventilator for supporting dehumidifiers/construction driers after floods and water mains damage. Ideal for aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms and for speeding up the drying of concrete, masonry, plaster and screed, for example. For commercial use in trade and industry.

REMS Orkan 1360	
Air volume	1360 m ³ /h
Power	145 W
REMS Orkan 2050	
Air volume stage I	1740 m³/h
Power stage I	355 W
Air volume stage II	2050 m ³ /h

REMS Orkan - for aeration.

Universal use

Power stage II

Powerful, highly efficient construction ventilator for supporting dehumidifiers/ construction driers after floods and water mains damage. Ideal for aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms and for speeding up the drying of concrete, masonry, plaster and screed, for example. For commercial use in trade and industry.

Design Orkan 1360

Axial fan in sturdy plastic housing of rotation-moulded polyethylene for a long life. Compact, handy design, weighing only 6.8 kg, with low-noise, single-phase capacitor motor 230V, 145 W, with practical handle for carrying. Generated air volume 1,360 m 3 /h.

Large-diameter exhaust air and suction hose, Ø 200 mm, 10 m long, e.g. for extracting air from rooms, spaces, shafts and cavities, for discharging sucked-in air or dusts to the outside and for inflating bouncy castles, hot-air balloons, for example, as an accessory. An exhaust and suction hose can be fitted to the aeration or deaeration side of the construction ventilator as the situation requires. Dust sack, Ø 200 mm, 2,980 mm long, washable, for collecting coarse and fine dusts up to dust class M, as an accessory.

Design Orkan 2050

Turbo radial fan with 2 air volume stages, in sturdy plastic housing of rotation-moulded polyethylene for a long life. Compact, handy design, weighing only 10 kg, with low-noise, single-phase capacitor motor 230V, 355/450W, with practical handle for carrying. Horizontal air outlet, adjustable to below 45° or vertical by appropriate resting surfaces on the plastic housing. Generated air volume in 2 selectable stages 1,740/2,050 m³/h. Especially suitable for speeding up drying of concrete, masonry, plaster and screed, for example.





450 W











Supply format

REMS Orkan 1360. Electric construction ventilator for commercial use. For aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms, for supporting the drying of, e.g., concrete, masonry, plaster and screed and for inflating bouncy castles, hot air balloons, for example. Capacitor motor 230V, $50\,\text{Hz},\,145\,\text{W},$ for continuous operation. Very quiet running. Air volume $1,360\,\text{m}^3/\text{h}.$ In a sturdy plastic housing. In a carton.

ArtNo.	€
132300R220	410,01

Other voltages on request.





Supply format

REMS Orkan 2050. Electric construction ventilator for commercial use. For aeration and deaeration of rooms, spaces, shafts and cavities as well as aeration and wind cooling of machines, marquees, event halls. For supporting the exchange of air in damp, musty cellar rooms. Especially also for drying of, e.g., concrete, masonry, plaster and screed. Capacitor motor 230V, 50 Hz, 355/450W, for continuous operation. Very quiet running. Air volume $1,740/2,050\,\text{m}^3/\text{h}$. In a sturdy plastic housing. In a carton.

ArtNo.	•
132301 R220 432	

Other voltages on request.



Accessories

Description	ArtNo.	€
Exhaust air and suction hose, Ø 200 mm, 10 m long, for extracting air from rooms, spaces, shafts and cavities, for discharging sucked-in air or dusts to the outside and for inflating bouncy castles, hot-air balloons, for example. For REMS Orkan 1360.	132307 R	158,71
Dust sack, Ø 200 mm , 2,980 mm long, washable, for collecting coarse and fine dusts up to dust class M. For REMS Orkan 1360.	132308R	146,67
Operating hours counter and electricity meter, e.g. for reporting to the damage regulator/customer. For REMS Orkan and others.	132132R220	54,81
REMS Detect W, dielectric moisture measuring device for non-destructive moisture measurement in building materials, e.g. concrete, masonry, plaster, wood.	12211ED	222 55
In a case. REMS Secco, electric air dehumidifiers/building driers, se	132115R	233,55



All prices excl. VAT 331

Index

		D .		
eration and deaeration	327	Deburring		. 73
kku-Press 22 V ACC	192-193	Dehumidifying		
kku-Press 22 V Connected		Diamond chasing and cutting machine		301
kku-Press E 22V ACC		Diamond chasing and cutting machines		
.kku-Press XL 45 kN 22 V ACC		Diamond core drilling		
migomigo 2		Dies Disinfecting		
unigo 2 Compact		Disinfecting Disinfection unit for drinking water installations		
migo 22V		Drain cleaner for manual and electric operation		
migo E		Drill stands		
quila 3B		Dry and wet extractor		
quila WB		Dry diamond core drilling crowns LS		
ssembling		Drying		
ttachment heads for button dies / intermediate rings / guide bu	shings31	DueCento		
xial Press Jointing	243			
x-Press 25 22 V ACC		E		
x-Press 25 L 22 V ACC				
x-Press 30 22V		Eco-Press		
.x-Press HK / H	245	Electric air dehumidifiers/building driers		
		Electric construction ventilator		
		Electric decalcifying pump		
1 4!	107	Electric diamond core drilling machine		
lending		Electric diamond core drilling machine with micro-pulse technology Electric diamond core drilling machine with speed regulation		
lending formers and back formersllitz		Electric diamond core dritting machine with speed regutation Electric die stock with quick-change die heads		
Brazing solder ISO 17672-CuP 179		Electric drain cleaning machine		
Butt welding machine		Electric drain cleaning machine		
Butt welding units		Electric LED flood light		
		Electric pipe and drain cleaning machines		
		Electric pipe and tube bender		
		Electric pipe cutter		. 82
able shear	241	Electric pipe freezing unit		271
alc-Push	116	Electric pressure testing pump		115
alibrating		Electric radial press 32 kN		
alibrating tool and outer-inner pipe deburrer		Electric reciprocating pipe saws		
alibrating tools and inner pipe deburrers		Electric sleeve welding unit		
alibrating tools and outer-inner pipe deburrers		Electric soldering pliers		
amScope HD		Electric soldering unit		
amSysamSys 2		Electric tube expander		
at 22 V VE		Electro-hydraulic pipe expander 34kN with automatic return		
atch S		Electro-hydraulic radial press 32 kN with automatic retraction		
atch W		Electro-hydraulic radial press XL 32 kN with automatic retraction		
at VE		Electronic camera inspection system		
ento		Electronic flushing and pressure testing unit with compressor		
ento 22 V	86-87	Electronic flushing unit with compressor		
hain pipe vice	105	EMSG 160-2		
hain pipe vice for workbench	105	Endoscope camera	274-	275
hamfering		E-Push 2		
hasers		Eskimo		
hasers and Holders		Eva		
ircular pipe sawing machine		Expander heads P		
leanH		Expander heads P-CEF		
leaningleaning and preservation unit for heating systems		Expanding Ex-Press 22 V ACC.		
leaning pads		Ex-Press Cu		
leanM		Ex-Press H		
obra 22/32		Ex-Press P		
ollum		Extracting		
ollum 22 V				
ompression heads	248-249	F		
onfirmation of suitability	239			
ontact 2000		Filling		
ordless axial press 13 kN with automatic return		Flushing		
fordless axial press 20 kN with automatic return		Folding work bench		
ordless axial press 30 kN		Folding work benches		
ordless die stock with quick-change die heads		Freezing		
ordless drain cleaning machineordless LED flood light		Frigo 2 F-Zero		4/
ordless pipe cutter		н		
ordless pipe cutting machine		"		
ordless pipe expander 20 kN with automatic return		Hand die stock with quick-change die heads		. 22
ordless pipe reciprocating saw		Hand pressure testing pump		114
ordless power drill/screwdriver		Hand tube bender		
ordless radial press 22 kN with automatic circuit control	147–151	Hand tube expander	252-2	253
ordless radial press 32 kN with automatic circuit control	190–191	Hand tube extractor		
ordless radial press 32 kN with automatic circuit control,		Helix 22 V VE		
pressure monitoring and result display	192–193	Herkules		
fordless radial press 32 kN with Connected functionality		Hold-Harmless and Indemnification Agreement		
via Wi-Fi radio standard and OLED display		Hot Dog 2		
ordless radial press XL 45 kN with automatic circuit control		Hurrican H		
ordless roll grooving machine		Hurrican H		
ordless tube bender		Hydro-Swing Hydro-Swing 22V		
ropping tongs		Tryuro-Jwilly 22 v	132-	133
ropping tongs Mini		1		
urvo		•		
urvo 22V		Inner pipe deburrer		. 97
urvo 50				
ut 110 Cu-INOX	95	J		
ut 110 P				
utter wheels		Jumbo		106
utting	73			

Index

К		Q	
KaliGrat E	100	Quick-change die heads	30
KaliGrat H		Quick-change die heads S	
KaliGrat R		•	
Krokodil 180 SR	322–323	R	
L		Radial Press Jointing	1/5
		RAG	
Lot Cu 3	267	RAS Cu	
Lot P6		RAS Cu-INOX	
Lumen 2800 22 V Lumen 5000/7000/10000		RAS PRAS P/SW 45/L	
Lumen 5000/7000/10000	110	RAS St	
М		RAS W INOX	
		Reciprocating saws	
Machine cleaner		REG 3 – 35	
Macho		REG 8 – 35	······································
Magnum RG		REG 10 – 42	
Magnum (up to 2")		REG 10-54REG 10-54 E	
Magnum (up to 4")		REG St ¼ – 2"	
Manual axial press		REG Universal	
Manual radial press		Roll Grooving	21
Material supports		Roll grooving attachment	
Mini-Cobra		Roll grooving machine	
Mini-Cobra S		ROS P	
Mini-Cobra S 22V VE Mini-Press 14V ACC		ROS P 26/SW 35 SROS PEX	
Mini-Press 22 V ACC		ROS P flex	
Mini-Press S 22 V ACC			70
MiniScope	274	S	
MSG			
Multi-Push S		Sanitol	
Multi-Push SL/SLW	120–123	Saw blades	
N		Sawing Secco 50/80	
N.		Single-hand tube bender	
Nano	82	Sinus	
Nano 11 V		Sleeve welding units	
Nippelfix	46	Soft solder paste of solder powder Sn97Cu3 according	
Nippelspanner		to ISO 9453:2014 and flux 3.1.1.C, EN 29454-1:1994	
NoCor	119, 123	Soft solder Sn97Cu3, ISO 9453:2014	
0		Solar-Push	
0		Soldering	
Oil-hydraulic hand pipe bender	130-131	Special Saw blades	
Oil-hydraulic pipe bender		SSG	
One-hand axial press		SSM 160KS	
One-hand pipe expander		SSM 160RS	
One-hand pipe shears		SSM 250KS	
One-hand pipe shears with ratchet feed		SSM 315RF	
Orkan 1360/2050 Outer-inner pipe deburrer		Suction and pressure cleaning device Swedish pattern wrench 'S'	282
Outer-inner tube deburrer		Swing	
Outer mile tube debut et		511 ng	
P		Т	
	0.5	-	
Paste Cu 3		Thread-cutting oil	
Peroxi Color Picus DP		Threading Threading machine	
Picus S1		Thread tables	
Picus S2/3,5		Tiger 22 V VE	
Picus S3		Tiger pneumatic	64
Picus SR		Tiger/VE/SR	62-63
Pipe and Drain cleaning		Tile drilling	
Pipe and Drain inspection		Turbo Cu INOV	
Pipe chamfering tools		Turbo Cu-INOX Turbo K	
Pipe cutters		Turbo soldering torch acetylene	
Pipe cutting and pipe chamfering tool		Turbo soldering torch propane	
Pipe cutting machine		Twist	
Pipe cutting tool		Twist/Hurrican	261
Pipe freezer			
Pipe shears with ratchet feed		U	
Pipe slitter Plastic Pipe Welding		Unimat 75	1.7_1.2
Pneumatic reciprocating pipe saw		Universal circular metal sawing machine	42-43
Portable pipe workstation with chain pipe vice		with automatic cooling lubricant unit	71
Power-Ex-Press P-CEF ACC	256	Universal deburrer	97
Power-Press ACC		Universal diamond core drilling crowns	
Power-Press SE		Universal diamond core drilling crowns LS	
Preserving Pressing rings		Universal electric reciprocating sawUniversal saw blades	
Pressing tongs		OTITY CI SAL SAW DIAUCS	68
Pressing tongs Mini		V	
Pressure testing			
Pull 2 L / M	324-325	V-Jet H	
Pull-Push		V-Jet TW	119, 123
Puma VE		w	
Push		W	
Python	134-135	Water pump pliers	104
		Wet and dry suction	
		,	

ArtNo. RG		ArtNo. RG VE		ArtNo. RG VE		ArtNo. RG VE	
043054 Z	119, 122, 125	114060 Z	101	140106 V 15		150958 Z	257
045159 Z	119, 122	114061 Z	101	140110 V 4	47	150960 Z	257
047069 Z	122	115000 H	114	140113 V	47	150961 Z	257
074021 Z 074041 Z	258 258	115001 H 115045 Z	114 114–115, 122		47 47	150962 Z 150963 Z	257 257
076117 Z	258	115110 Z	114-115		123	150968 Z	257
079003 Z	311, 313, 315, 318–319	115140 Z	122		137, 139, 141–142	151000 E	259
079005 Z	311, 318	115217 Z	125	150000 H	252	151002 E	259
079006 Z	311, 318	115220 Z	125	150005 H	252	151003 H	258
079010 Z	311, 318	115221 Z	125	150006 H	252	151004 H	258
079012 Z	311, 313, 315, 318–319	115311 M	125	150007 H	252	151005 H	258
079013 Z 079018 Z	311, 318 311, 318	115312 M 115314 Z	125 125	150008 H 150010 H	252 252	151010 E 151105 Z	259 258–259, 261
077010 Z	311, 318	115314 Z	125	150017 H	252	151110 Z	258–259, 261
090015 Z	119, 123	115319 Z	125	150018 H	252	151120 Z	258–259, 261
091072 Z	119, 123	115323 Z	125	150019 H	252	151125 Z	258-259, 261
091073 Z	119, 123	115324 Z	125	150020 H	252	151130 Z	258–259, 261
110000 Z	46	115325 Z	125	150021 H	253	151140 Z	258–259, 261
110100 Z 110200 Z	46 46	115326 Z 115375 Z	125 125	150022 H 150025 H	253 253	151145 Z 151150 Z	258–259, 261 258–259, 261
110300 Z	46	115500 M	115	150025 H	253	151155 Z	258–259, 261
110400 Z	46	115602 Z	119, 123	150027 H	253	151160 Z	258–259, 261
110500 Z	46	115604 Z	119, 123	150028 H	253	151165 Z	258-259, 261
110600 Z	46	115605 Z 6	119, 123	150029 H	253	151170 Z	258–259, 261
110620 Z	46	115607 Z 6	119, 123	150033 H	253	151175 Z	258–259, 261
110621 Z 111000 Z	46 46	115608 Z 6 115609 Z	119, 123	150100 Z 150105 Z	252 252	151200 Z 151210 Z	258–259, 261
1111000 Z	46	115610 M	119, 122 122	150103 Z	252	151210 Z	258–259, 261 258–259, 261
111200 Z	46	115611 M	122	150120 Z	252	151240 Z	258–261
111300 Z	46	115612 Z	119, 123	150125 Z	252	151402 Z	258-261
111400 Z	46	115621 Z	119, 122	150130 Z	252	151600 Z	259-261
111500 Z	46	115633 Z	119, 122	150140 Z	252	151618 Z	258
111620 Z 111621 Z	46	115661 Z	122	150145 Z 150150 Z	252	152106 Z	266
111621 Z 111700 Z	46 46	115667 Z 115677 Z	122 119, 123	150150 Z 150155 Z	252 252	152109 Z 153020 H	266 129
111800 Z	46	115703 Z	119, 123	150160 Z	252	153021 H	129
111900 Z	46	115747 Z	122	150165 Z	252	153022 H	129
113000 H	74	115810 M	118	150170 Z	252	153023 H	129
113100 H	74	115900 M	116	150175 Z	252	153025 H	129
113200 H	10 75	116000 H	104	150180 Z	252	153026 H	129
113210 V 113213 V	10 76, 81, 94–95 10 76, 81	116005 H 116010 H	104 104	150185 Z 150190 Z	252 252	153027 H 153028 H	129 129
113213 V	10 76, 61	116015 H	104	150195 Z	252	153028 H 153029 H	129
113225 V	10 78, 81	116020 H	104	150205 Z	252	153030 H	128
113230 H	10 75	116050 H	104	150210 Z	252	153100 Z	129
113240 H	10 75	116055 H	104	150220 Z	252	153115 Z	129, 131, 133
113241 H	10 75	116060 H	104	150225 Z	252	153125 Z	129
113250 H 113255 H	10 77 10 77	120120 Z 120125 Z	107 107	150230 Z 150235 Z	252 252	153140 Z 153155 Z	129 129, 131, 133
113260 H	10 77	120130 Z	107	150240 Z	252	153160 Z	129, 131, 133
113300 H	10 76	120200 Z	106	150245 Z	252	153170 Z	129, 131, 133
113320 H	8 77	120240 Z	106	150250 Z	252	153175 Z	129, 131, 133
113330 H	8 75	120250 Z	105	150500 Z	252	153180 Z	129, 131, 133
113340 H	10 77	120270 Z	105	150510 Z	253	153185 Z	129, 131, 133
113350 H 113351 H	10 75	130002 H 130207 Z	270 270	150515 Z 150550 H	255, 257 253	153190 Z 153195 Z	129, 131, 133 129, 131, 133
	10 76, 78, 97	130207 Z	270	150600 Z	252–253	153200 Z	129, 131, 133
113370 H	78	130209 Z	270	150806 Z	257	153205 Z	129, 131, 133
113380 H	76	130383 Z	270	150807 Z	257	153210 Z	129, 131, 133
113385 H	76	130410 Z	270	150808 Z	257	153265 Z	128-129
113400 H	76	130415 Z	270	150809 Z	257 257	153270 Z	129
113401 H 113410 H	76 78	130430 Z 130450 Z	270 270	150812 Z 150826 Z	257	153300 Z 153303 Z	128 128
113450 H	80	130455 Z	270	150828 Z	257	153304 Z	128
113461 V	10 80-81	130460 Z	270	150842 Z	257	153305 Z	128
113480 H	10 80	130465 Z	270	150843 Z	257	153306 Z	128
113481 Z	80	130470 Z	270	150845 Z	257	153307 Z	128
113500 H	76	130475 Z	270	150846 Z	257	153400 Z	133
113810 H 113815 Z	98 98	130480 Z 130485 Z	270 270	150849 Z 150855 Z	257 257	153401 E 153410 E	133 133
113815 Z	10 98	130490 Z	270	150858 Z	257	153410 E 153411 E	133
113830 H		130495 Z	270	150868 Z	257	153412 E	133
113835 H	10 99	131012 M	271	150873 Z	257	153413 E	133
113840 Z	85, 87	131104 Z	271	150882 Z	257	153414 E	133
113900 H		131110 Z	271	150883 Z	257	153415 E	133
113910 H 114000 H	100 97	131116 Z 131156 Z	271 271	150885 Z 150886 Z	257 257	153416 E 153417 E	133 133
114000 H	100	131157 Z	271	150887 Z	257	153417 E	133
114030 Z	100	131158 Z	271	150888 Z	257	153419 E	132
114032 Z	100	131160 Z	271	150894 Z	257	153450 Z	131, 133
114033 Z	100	132010 M	329	150897 Z	257	153455 Z	133
114034 Z	100	132011 M	329	150912 Z	257	153500 Z	131
114035 Z 114036 Z	100 100	132100 Z 132104 Z	329 329	150913 Z 150914 Z	257 257	153501 Z 153510 H	131, 133 131
114036 Z	100	132104 Z 132115 Z	329, 331	150914 Z 150915 Z	257	153510 H	131
114037 Z	100	132121 Z	329	150916 Z	257	153520 H	131
114039 Z	100	132129 Z	329	150923 Z	257	153522 H	131
114040 Z	100	132132 Z	329, 331	150926 Z	257	153523 H	131
114041 Z	100	132300 M	331	150943 Z	257	153525 H	131
114042 Z 114043 Z	100 100	132301 M 132307 Z	331	150944 Z 150945 Z	257 257	153526 H 153527 H	131 131
114043 Z	100	132307 Z 132308 Z	331 331	150946 Z	257	153527 H 153528 H	131
114045 Z	101	140100 V 4	47	150947 Z	257	153529 H	131
114046 Z	101	140101 V	47	150950 Z	257	153531 Z	131, 133
114047 Z	101	140103 V	47	150952 Z	257	153532 Z	131, 133
114048 Z	101	140105 V 12	4/	150957 Z	257	153540 Z	131, 133

ArtNo. RG	VE	Page	ArtNo.	RG VE	Page	ArtNo. RG VE	Page	ArtNo. RG VE	Page
153570 Z		131	172611		289	181050 V	313	250320 E	298
154000 Z		142	172612		289	181055 V	313	250341 Z	298
154001 H		142	174000		287	181059 V	313	250342 Z	298
154002 H		142	174010		287	181060 V	313	250343 Z	298
154003 H 154004 H		142 142	174011 174012		287 287	181065 V 181070 V	313 313	252026 M 252046 M	294 295
154010 H		142	174050		288	181075 V	313	252103 Z	294-295
154160 Z		142	174101		288	181080 V	313	254025 M	296
156000 E		260	174150		288	181085 V	313	254103 Z	296
156002 E		260	174154	Z	288	181090 V	313	255020 M	297
156004 E		260	174200		288	181095 V	313	255103 Z	297
156010 E		261	174201		288	181410 V	315	256020 E	293
156012 E		261	174203 174205		288	181415 V	315	256213 E	293
156014 E 156150 Z		261 260–261	174205		288 288	181420 V 181425 V	315 315	256220 E 256233 E	293 293
156200 Z		260-261	174250		289	181430 V	315	256240 E	293
156225 Z		260-261	174265		289	181435 V	315	256242 Z	293
156250 Z		260-261	174270	Z	289	181440 V	315	256320 E	293
156300 Z		260-261	174275		289	181445 V	315	256342 Z	293
156350 Z		260-261	174282		289	181450 V	315	256400 Z	293
156375 Z		260-261	174291		289	181455 V	315	256410 Z	293
156400 Z 156425 Z		260–261 260–261	174293 174295		289 289	181459 V 181460 V	315 315	256420 Z 256430 Z	293 293
156450 Z		260-261	174296		289	181465 V	315	256440 Z	293
156475 Z		260-261	174305		289	181470 V	315	256450 Z	293
160010 H		266	174306		289	181475 V	315	256460 Z	293
160200 V	10	267	174310	Z	289	181480 V	315	256470 Z	293
160210 V	10	267	174311		289	181500 V	319	256480 Z	293
160220 V	10		174340		289	181502 V	319	256490 Z	293
	25		174341 175000		289	181504 V	319	256500 Z	293
161010 H 163020 E		266 264	175000		277 277	181506 V 181508 V	319 319	256510 Z 256520 Z	293 293
163350 Z		264	175007		277	181510 V	319	256530 Z	293
164011 E		265	175010		277	181512 V	319	261002 E	292
164050 E		265	175011		277	181514 V	319	290000 H	79
164110 Z		265	175018		277	181516 V	319		78
164111 Z		265	175026		277, 280	181518 V	319		78
164115 Z		265	175057		277, 280	181520 V	319		79, 81
164250 Z		265	175058		277, 280	181522 V	319 319		79, 81 79
170010 H 170011 Z		282 288	175123 175210		277, 280 111	181524 V 181526 V	319	290050 H 290100 H	79
170011 Z		288	175210		111	181528 V	319		79, 81
170022 E		283	175220		110	181530 V	319	290200 H	79
170023 E		283	175221	Z	110	181532 V	319	290216 V 10	79, 81
170025 E		285	175222		110	181700 V	320	290300 H	79
170027 E		285	175230		110–111	181710 V	320	290316 V 5	79, 81
170118 Z		282, 285	175300		280	181711 V	320	290400 H	94
170200 Z 170201 Z		282, 288 282–283, 285	175301 175302		279 279	181712 V 181713 V	320 320	290410 H 290411 H	95 95
170201 Z		282–283, 285	175302		279	181714 V	320	290411 H	95
170300 H		282	175304		279	181715 V	320	290420 Z	94
171150 Z		288	175305		277, 280	182006 Z	311	290421 Z	94
171151 Z		288	175306		277, 280	182010 Z	311, 318	290422 Z	94
171200 Z		288	175307		280	182050 Z	311, 318	290423 Z	94
171201 Z		288	175308		280	183000 Z	307	290424 Z	94
171205 Z 171210 Z		288 288	175312 175323		280 280	183010 E 183022 E	307 307	290425 Z 290426 Z	94 94
171210 Z		289	175323		280	183023 E	307	290427 Z	94
171265 Z		289	175339		280	183600 Z	310, 318	290430 Z	94
171270 Z		289	175343		280	183603 Z	311, 318	290431 Z	94
171275 Z		289	175400		275	183604 Z	311, 318	290432 Z	94
171280 Z		289	175401		274	183605 Z	311, 318	290433 Z	94-95
171290 Z		289	175440		275	183606 Z	311, 325	290437 Z	94 94–95
171291 Z 171305 Z		289 289	180000 180001		303 305	183607 Z 183632 Z	311, 318 307, 310	290440 Z 290444 Z	94-95
171305 Z		289	180003		317	183670 Z	311, 318	290445 Z	94
171340 Z		289	180010		303	183675 Z	311	290446 Z	94
171341 Z		289	180011		305	183700 Z	310, 318	290447 Z	94
172000 Z		287	180012		309	185001 Z	323	290448 Z	94
172010 M		287	180015		311, 313, 315, 318–319	185011 E	323	290449 Z	94
172011 M 172012 M		287 287	180016 180028		317 305	185024 Z 185026 V	323 323	290500 H 291000 H	79 93
172012 M		288	180028		305	185027 V	323	291010 H	93
172051 Z		288	180030		309	185058 Z	283, 323	291023 Z	93
172150 Z		288	180032		303	185511 Z	325	291036 Z	93
172151 Z		288	180033		317	185512 Z	325	291037 Z	93
172154 Z		288	180035		317	185513 Z	325	291101 H	93
172200 Z		288	180036		317	185515 Z	325	291112 Z	93
172201 Z 172203 Z		288 288	180052 180053		313, 315 313, 315	185600 M 185601 M	325 325	291200 H 291201 Z	93 93
172203 Z 172205 Z		288	180054		313, 315	185603 M	325	291201 Z 291220 H	93
172210 Z		288	180056		313, 315	185604 M	325	291221 Z	93
172250 Z		289	180057	Z	313, 315	185654 Z	325	291240 H 8	92
172265 Z		289	180140	Z	311	190051 Z	109	291241 Z	92
172270 Z		289	180145		318	190053 Z	109	291242 H 8	91
172275 Z		289	180155		311, 313, 315, 318–319	190100 Z	109	291243 Z	91
172280 Z 172281 Z		289 289	180160 180600		311, 325 303, 305, 307, 317	190110 E 250020 E	109 298	291244 Z	91 93
172281 Z 172290 Z		289	181010		313	250020 E 250041 Z	298	291250 H 291251 Z	93
172270 Z		289	181015		313	250041 Z	298	291270 H	93
172293 Z		289	181020		313	250120 E	298	291271 Z	93
172305 Z		289	181025	V	313	250142 Z	298	291290 H	93
172310 Z		289	181030		313	250143 Z	298	291400 H 10	
172340 Z		289	181035		313	250220 E	298	291401 Z	90
172341 Z 172610 Z		289 289	181040 181045		313 313	250242 Z 250243 Z	298 298	291410 H 10 291411 Z	90 90
			.51045			_00L +0 L	•		

ArtNo. RG VE	Page	ArtNo. RG VE	Page	ArtNo. RG VE	Page	ArtNo. RG VE	Page
291420 H 8	92	342080 S	35, 37, 39	521120 Z	30	561002 V	68
291421 Z	92	344100 Z	33, 35, 37, 39, 53	521122 S	30	561003 V	68
291430 H 8	90	344105 Z	33, 35, 37, 39, 53	521130 Z	30	561004 V	68
291431 Z	90	344150 Z	33, 35, 37, 39, 53	521132 S	30	561005 V	68
292011 Z	96	347000 M	33, 35, 37, 39, 48	521140 Z	30	561006 V	68
292110 H	96	347001 M	48	521142 S	30	561007 V	68
292210 H 340100 Z	96 37, 39	347005 M 347006 M	51 49	521150 Z 521152 S	30 30	561008 V 561101 V	68 69
340110 Z	53	347008 M	48	521160 Z	30	561101 V	69
340200 M	33	347007 Z	49	521160 Z	30	561103 V	69
340201 M	33	347009 M	49	521170 Z	30	561104 V	69
340202 M	33	347010 Z	49	521172 S	30	561105 V	69
340206 M	33	347030 Z	48	521180 Z	30	561106 V	69
340207 M	33	347034 Z	48	521182 S	30	561107 V	69
340208 M	33	347035 Z	48	521200 Z	30	561108 V	69
340220 M	35	347040 Z	48	521202 S	30	561109 V	69
340221 M	35	347046 Z	48	521210 Z	30	561110 V	69
340222 M 340226 M	35 35	347047 Z 347053 Z	48 48	521212 S 521220 Z	30 30	561111 V 561112 V	69 69
340227 M	35	380303 M	37	521220 Z	30	561113 V	69
340228 M	35	380304 M	37	521230 Z	30	561114 V	69
340230 M	53	380305 M	37	521232 S	30	561115 V	69
340231 M	53	380306 M	37	521240 Z	30	561116 V	69
340232 M	53	380307 M	37	521242 S	30	561117 V	69
341000 Z	33, 35, 37, 39	380308 M	37	521250 Z	30	561118 V	69
341401 S	40	380309 M	37	521252 S	30	561119 V	69
341402 S	40	380310 M	37	521260 Z	30	561120 V	69
341403 S	40	380311 M	37	521262 S	30	561121 V	69
341404 S 341406 S	40 40	380312 M 380313 M	37 37	521270 Z 521272 S	30 30	561122 V 561123 V	69 69
341406 S 341407 S	40	380314 M	37	521272 S 521280 Z	30	561124 V	69
341407 S	40	380426 M	39	521280 Z 521282 S	30	561125 V	69
341409 S	40	380427 M	39	521300 Z	30	561126 V	69
341411 S	40	380428 M	39	521302 S	30	563000 Z	63-64, 67
341412 S	40	380429 M	39	521310 Z	30	563008 Z	63-64
341413 S	40	380430 M	39	521312 S	30	563100 Z	63-64
341414 S	40	380431 M	39	521320 Z	30	563200 Z	63-64
341416 S	40	380441 M	39	521322 S	30	563203 Z	63–64
341417 S	40	380442 M	39	521330 Z	30	565051 Z	71
341418 S	40	380443 M	39	521332 S	30	566030 Z	29, 61, 67, 141
341419 S	40	380444 M	39	521340 Z	30	566051 Z	58-59, 63-64
341426 S 341427 S	40 40	380445 M 380446 M	39 39	521342 S 521350 Z	30 30	570100 Z	200–201, 207–209, 212–213, 217, 220,
341427 S	40	380447 M	39	521350 Z	30		229–231, 234
341429 S	40	380448 M	39	522000 Z	22–27, 29	570107 Z	200-201, 207-208,
341430 S	40	381000 Z	37, 39	522050 Z	23		210, 212, 221, 229–231,
341431 S	40	381050 Z	37	526050 Z	22	F70110 7	235-236
341432 S	40	381401 S	40	526052 Z	23	570110 Z	200–204, 206–221, 224–232, 234, 237
341433 S	40	381405 S	40	530000 Z	25	570112 Z	200, 207–208, 210, 230
341434 S	40	381410 S	40	530003 Z	24	570115 Z	200–201, 206–208,
341435 S	40	381415 S	40	530004 Z	29, 51		210-212, 214-215, 219,
341436 S	40	381430 S	40	530013 E	24		221–224, 228–231,
341437 S	40	381431 S	40	530014 E	24	E70117 7	235-237
341438 S	40	381432 S	40	530015 E	29	570117 Z 570120 Z	200, 207–208, 210, 230 200–204, 206–221,
341439 S	40 40	381433 S 381622 V 5	40	530016 E	29 25	370120 2	224–232, 234, 237
341440 S 341441 S	40	381622 V 5 520003 H	37, 39, 74, 81 22	530020 E 530022 E	25	570125 Z	200–201, 206–208,
341441 S	40	520003 H	22	530022 E	25		210-212, 214-215, 219,
341443 S	40	520004 H	22	533000 Z	24-25		221–224, 228–231, 235–237
341444 S	40	520009 H	22	536000 Z	24-25	570130 Z	200–204, 206–221,
341445 S	40	520010 H	22	540000 Z	26	370130 2	224–232, 234, 237
341446 S	40	520013 H	22	540001 Z	27	570132 Z	200, 230, 235
341466 S	40	520014 H	22	540020 E	26	570135 Z	200–201, 206–208,
341467 S	40	520015 H	22	540022 E	26		210–212, 214–215, 219,
341468 S	40	520016 H	22	540023 E	27		221–224, 228–231, 235–237
341469 S 341470 S	40 40	520017 H	22 23	540024 E 540025 E	27 27	570137 Z	200, 230, 235
341470 S 341471 S	40	520025 Z 520026 Z	23	540025 E 541401 Z	31	570140 Z	200-204, 206-221,
341471 S	40	520026 Z	23	541401 Z	31		224-232, 234, 237
341473 S	40	521000 Z	30	541406 Z	31	570145 Z	200-201, 207-208,
341474 S	40	521002 S	30	541410 Z	31		210–212, 214–215, 219, 221–224, 228–231,
341475 S	40	521010 Z	30	541413 Z	31		235–237
341476 S	40	521012 S	30	541414 Z	31	570150 Z	200-204, 206-221,
341477 S	40	521020 Z	30	541415 Z	31		224-232, 234, 237
341478 S	40	521022 S	30	541416 Z	31	570155 Z	200-201, 207-208,
341479 S	40	521026 Z	23	543000 Z	26		210–212, 214–215, 219, 221–224, 228–231,
341480 S	40	521030 Z	30	543010 Z	27, 29		235–237
341481 S 341482 S	40 40	521032 S 521036 Z	30 23	543100 Z 546000 Z	24-26, 63-64	570160 Z	200, 203, 206, 209,
341482 S 341483 S	40 40	521036 Z 521040 Z	30	546000 Z	26–27 63		213, 215–216, 220, 231,
341483 S 341484 S	40	521040 Z 521042 S	30	560000 Z 560001 Z	63	E701/F 7	234, 237
341485 S	40	521042 S	23	560001 Z	64	570165 Z	200–201, 207–208, 210–212, 214, 219,
341486 S	40	521050 Z	30	560003 Z	58		221–224, 228–231,
341487 S	40	521052 S	30	560004 Z	59		235–237
341488 S	40	521056 Z	23	560008 Z	63	570170 Z	200, 203, 206, 209,
341489 S	40	521060 Z	30	560010 E	61		213, 215–216, 220, 231,
341490 S	40	521062 S	30	560011 Z	67	570175 Z	234, 237 200–201, 207–208,
341491 S	40	521066 Z	23	560020 E	63	L	210–212, 214, 219,
341493 S	40	521070 Z	30	560022 E	64		221–224, 228–231,
341494 S 341495 S	40 40	521072 S	30 30	560023 E	58	E70200 7	235–237
341496 S	40	521080 Z 521082 S	30	560026 E 560027 E	63 63	570280 Z	186–187
341497 S	40	521062 S 521100 Z	30	560040 E	59	570290 Z 570295 Z	238 238, 241
341498 S	40	521100 Z	30	560052 E	61	570295 Z 570300 Z	201, 204–205, 213, 233
341499 S	40	521110 Z	30	560053 E	67	570300 Z 570310 Z	204–206, 210, 216, 219,
	33, 35, 37, 39, 74, 81	521112 S	30	561001 V	68		222, 226–227, 232, 234

Art No	DC VE	Page	Art No DC VE	Dago	Art No DC VE	Page	Art No DC VE	Dago
ArtNo. 570315		222	ArtNo. RG VE 570780 Z	200–201, 203–204,	ArtNo. RG VE 571583 Z	29, 51, 61, 67, 87, 109,	ArtNo. RG VE 572676 Z	227
570313		201–206, 208–212,	370700 2	206–207, 209–216,	371303 Z	111, 133, 141, 149, 151,	572678 Z	227
370320	_	214–219, 222–223,		218–227, 232–234,		191, 193, 195, 197, 244,	572680 Z	227
		226–228, 232–234,		236-237		247, 255, 285	572687 Z	210-211, 221, 225, 236
		236-237	570785 Z	200-228, 232-234,	571585 Z	29, 51, 61, 67, 87, 109,	572689 Z	210–211, 221, 225, 236
570330	Z	219		236-237		111, 133, 141, 149, 151,	572691 Z	210-211, 221, 225, 236
570340	Z	201-202, 204-206,	570790 Z	200, 202, 204-205,		191, 193, 195, 197, 244,	572693 Z	211, 221, 225, 236
		209–210, 214, 216,		207, 209-211, 214-224,		247, 255, 285	572695 Z	211, 221, 225, 236
		218-219, 222-223,		226–228, 231–234, 236	571587 Z	29, 51, 61, 67, 87, 109,		
		226–227, 232–233	570795 Z	204–205, 207, 209–211,		111, 133, 141, 149, 151,	572697 Z	211, 221, 225, 236
570350	Z	201–206, 208–212,		214–224, 226–228,		191, 193, 195, 197, 244,	572706 Z	200–204, 206–213, 215–221, 224–232,
		214–219, 222–223,		231–234, 236	E71/20 7	247, 255, 285		234, 237
		226–228, 232–234,	570845 Z	204, 206, 218, 226–227	571630 Z	234	572708 Z	200–204, 206–213,
5500/0	_	236-237	570850 Z	202, 204–206, 209,	571635 Z	201, 235–236	0,2,00 2	215-221, 224-232,
570360	Z	201–202, 204–206,		211, 214, 217–219, 223,	571640 Z	201, 235–236		234, 237
		209, 214–216, 218–219,	F700FF 7	226–228, 234, 236	571645 Z	235–236	572714 Z	227
570370	7	222–223, 232–233, 236 202–212, 214, 216–219,	570855 Z	204, 206, 209, 214, 218, 223, 226–227	571700 Z	206	572716 Z	227
3/03/0	_	222–223, 226–228,	E70040 7		571702 Z	206	572727 Z	206, 213, 231
		232–234, 237	570860 Z	202, 204–206, 209, 211, 214, 217–219, 223,	571704 Z	206	572795 Z	238
570380	7	201–206, 208–212,		226–228, 234, 236	571706 Z	206	572801 Z	238
0,000	_	214–219, 222–223,	570870 Z	202, 204–206, 209,	571708 Z	206	572802 Z	238
		226-228, 232-234,	070070 2	211, 214, 217–219, 223,	571710 Z	206	572809 Z	238
		236–237		226-228, 234	571712 Z	206	572810 Z	238
570390	Z	202, 205, 208-210,	570880 Z	202, 204-206, 209,	571714 Z	206	572813 Z	238
		214-218, 222-223, 228,		211, 214, 217–219, 223,	571740 Z	223, 234–235	572815 Z	207, 223-224, 235-236
		233–234, 236		227-228, 234, 236	571750 Z	223, 236	572816 Z	207, 223-224, 235-236
570400		214	570905 Z	234	571752 Z	223, 236	572817 Z	207, 223–224, 235–236
570410	Z	214	570910 Z	206, 212, 226, 234,	571754 Z	223, 236	572818 Z	207, 223–224, 235–236
570420	Z	214		236-237	571756 Z	223, 236	572819 Z	209, 214, 220–222,
570430	Z	214	570915 Z	206, 212, 226, 234,	571758 Z	223, 236		235-236
570440		214		236-237	571760 Z	223, 236	572820 Z	209, 214, 220-222,
570450	Z	214	570920 Z	226, 234, 236	571764 Z	223, 228, 234-235		235–236
570452		213, 216, 218, 237	570925 Z	206, 212, 236-237	571766 Z	223, 228, 234-235	572821 Z	209, 214, 220–222,
570455		200, 205–206, 209–210,	570930 Z	229-231	571767 Z	223, 228, 234-235	F72022 7	235-236
		213, 215–216, 218, 220,	570932 Z	230	571770 Z	205, 209, 214, 220–223,	572822 Z	236
		222, 225-228, 231-233,	570935 Z	214, 228–231	_	235-236	572823 Z	236
		236-237	570937 Z	230	571775 Z	205, 209, 214, 220-223,	572824 Z	236
570457		209, 213, 218, 225	570940 Z	214, 228–231		235-236	572828 Z	204-205, 207, 214-215,
570460	Z	200-206, 208-228,	570945 Z	214, 228–231	571780 Z	205, 209, 214, 220-223,		220–224, 227, 233–234,
		231-234, 236-237	570950 Z	214, 228–231		235-236	F72020 7	236
570462	Z	209-210, 213, 216, 218,	570750 Z	214, 228–231	571785 Z	205, 209, 214, 220-223,	572829 Z	205, 215, 218, 222–223, 225–226, 233–234
		220, 225–226, 231, 237	570733 Z	236		235–236	572830 Z	204, 213
570465	Z	202, 204–206, 209–210,			571790 Z	205, 209, 214, 220–223,	572836 Z	227
		213–216, 218, 220,	571136 Z	238		235–236	572837 Z	204-205, 207, 209-210,
	_	222–228, 231–233, 237	571137 Z	238	571795 Z	205, 209, 214, 220–223,	372037 2	214–216, 218, 220,
570467		213, 215–216, 218, 225	571283 Z	187		235–236		222-224, 226-228,
570470	Z	200–206, 208–228,	571290 Z	191, 193, 195	571797 Z	223, 236		232-234, 236
	_	231–234, 236–237	571320 Z	201–202, 204–205, 224,	571855 Z	232	572839 Z	211, 225
570472		218, 225	EE400E 7	227, 233	571865 Z	241	572840 Z	211, 225
570475	Z	201–220, 222–228,	571325 Z	201–202, 204–206,	571866 Z	184, 241	572841 Z	211, 225
	_	231–234, 236–237		210-211, 215, 218,	571870 Z	241	572844 Z	223, 228, 234-235
570477		218, 225	571327 Z	222–225, 227, 232–233	571871 Z	241	572845 Z	223, 228, 234-235
570480	Z	200–206, 208–228,		204, 206, 211, 218	571887 Z	241	572846 Z	235
	_	231–234, 236–237	571330 Z	201–202, 204–206, 210–211, 215, 218,	571889 Z	241	572847 Z	207
570482		205, 218, 234		222–225, 227, 232–233	571890 Z	241	572850 Z	200, 206-208, 210-212,
570485	Z	200, 202–206, 209–210,	571335 Z	201–202, 204–206,	571891 Z	184, 241		219, 223-224, 228-231,
		213–228, 232–234,	371333 Z	210-211, 215, 222-225,	571895 Z	241		235-237
	_	236-237		227, 232–233	571896 Z	184, 241	572851 Z	200, 206-208, 210-212,
570487	Z	203, 205–206, 217–218,	571337 Z	218, 224	571900 Z	215, 226, 237		219, 223–224, 228–231,
550/05	_	232-233	571340 Z	201, 204, 206, 210–211,	571904 Z	215, 226, 237		235–237
570495	2	200–204, 206, 209–210,	071040 2	215, 222–223, 225,	571932 Z	210	573008 Z	244
		213–216, 218–224, 227,		232–233	571934 Z	210	573018 E	244
E70/20	7	231–233, 236	571342 Z	218, 224	571980 Z	218	573020 Z	247
570620		224	571360 Z	221	571960 Z 572101 Z	186	573021 Z	247
570650		224	571370 Z	221	572111 E	186	573022 E	247
570660		224	571375 Z	221			573023 E	247
570670		224	571380 Z	221	572350 Z	236	573100 Z	244
570680		224	571432 Z		572355 Z	236	573102 Z	244
570685		234		210	572365 Z	204–205, 207, 209–211, 214–224, 226–228,	573106 Z	244
570690		224	571434 Z	210		231–234, 236	573108 Z	244
570717	Z	202, 205–206, 209,	571436 Z	210	572385 Z	204, 209, 213, 217–218,	573110 Z	244
		211–212, 214, 217–219,	571438 Z	210	372303 Z	204, 209, 213, 217–216,	573112 Z	249
FRORES	-	223, 226, 228, 234, 237	571450 Z	203, 236–237	572400 Z	200, 202–206, 209–210,	573114 Z	249
570720		206, 209, 218, 223, 226	571455 Z	203, 236–237	3,2400 Z	213–218, 220–228,	573116 Z	249
570727	Z	202, 205–206, 209,	571460 Z	203, 236–237		232–234, 236–237	573118 Z	249
		211–212, 214, 217–219,	571465 Z	203, 236–237	572405 Z	200, 202-206, 209-210,	573120 Z	249
F70700	7	223, 226, 228, 234, 237	571470 Z	203, 236–237	_	213-218, 220-228,	573122 Z	249
570730	4	202, 205–206, 209,	571475 Z	203, 236-237		232-234, 236-237	573124 Z	249
		211–212, 214, 217–219, 223, 226, 228, 234, 237	571477 Z	203, 237	572413 Z	223, 228, 234-235	573126 Z	249
570735	7	202, 206, 209, 211–212,	571480 Z	213	572470 Z	214	573128 Z	249
3/0/33	_	202, 206, 209, 211–212, 214, 217–219, 223, 226,	571485 Z	213	572600 Z	211, 218, 225, 233	573150 Z	249
		228, 237	571545 Z	147	572605 Z	211, 218, 225, 233	573152 Z	249
570742	Z	204, 209, 213, 217–218,	571555 Z	147	572610 Z	211, 218, 225, 233	573154 Z	249
	-	228	571560 Z	83, 147	572615 Z	211, 218, 225, 233	573156 Z	249
570747				147	572620 Z	211, 218, 225, 233	573158 S	249
	Z	204, 209, 213, 217-218	5/1565 /		572625 Z	211, 218, 225, 233	573160 Z	249
3/0/4/	Z	204, 209, 213, 217–218, 228	571565 Z 571567 Z	109 133 149 151 191			370100 2	
		228	571565 Z 571567 Z	109, 133, 149, 151, 191, 193, 195, 244, 247, 255,		234		249
570750		228 202–205, 209, 211, 216–220, 223, 227–228,		109, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285	572630 Z	234 234, 236	573162 Z	249 249
		228 202–205, 209, 211,	571567 Z	193, 195, 244, 247, 255, 285	572630 Z 572632 Z	234, 236	573162 Z 573164 Z	249
	Z	228 202–205, 209, 211, 216–220, 223, 227–228,		193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247,	572630 Z 572632 Z 572636 Z	234, 236 234, 236	573162 Z 573164 Z 573166 Z	249 249
570750	Z	228 202–205, 209, 211, 216–220, 223, 227–228, 232–234	571567 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285	572630 Z 572632 Z 572636 Z 572638 Z	234, 236 234, 236 234, 236	573162 Z 573164 Z 573166 Z 573168 Z	249 249 249
570750	Z Z	228 202-205, 209, 211, 216-220, 223, 227-228, 232-234 200, 205, 210, 213, 216, 220, 222-223, 226-227 200-220, 222-228,	571567 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285 61, 87, 109, 111, 133, 141,	572630 Z 572632 Z 572636 Z 572638 Z 572640 Z	234, 236 234, 236 234, 236 234, 236	573162 Z 573164 Z 573166 Z 573168 Z 573170 Z	249 249 249 249
570750 570760	Z Z	228 202-205, 209, 211, 216-220, 223, 227-228, 232-234 200, 205, 210, 213, 216, 220, 222-223, 226-227 200-220, 222-228, 232-234, 236-237	571567 Z 571571 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285 61, 87, 109, 111, 133, 141, 149, 151, 191, 193, 195,	572630 Z 572632 Z 572636 Z 572638 Z 572640 Z 572642 Z	234, 236 234, 236 234, 236 234, 236 201	573162 Z 573164 Z 573166 Z 573168 Z 573170 Z 573172 Z	249 249 249 249 249
570750 570760	z z z	228 202–205, 209, 211, 216–220, 223, 227–228, 232–234 200, 205, 210, 213, 216, 220, 222–223, 226–227 200–220, 222–228, 332–234, 236–237 201–202, 204–207,	571567 Z 571571 Z 571574 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285 61, 87, 109, 111, 133, 141, 149, 151, 191, 193, 195, 197, 244, 247, 255, 285	572630 Z 572632 Z 572636 Z 572638 Z 572640 Z 572642 Z 572644 Z	234, 236 234, 236 234, 236 234, 236 201 201	573162 Z 573164 Z 573166 Z 573168 Z 573170 Z 573172 Z 573176 Z	249 249 249 249 249 249
570750 570760 570765	z z z	228 202-205, 209, 211, 216-220, 223, 227-228, 232-234 200, 205, 210, 213, 216, 220, 222-223, 226-227 200-220, 222-228, 232-234, 236-237 201-202, 204-207, 209-210, 213-214, 216,	571567 Z 571571 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285 61, 87, 109, 111, 133, 141, 149, 151, 191, 193, 195, 197, 244, 247, 255, 285 29, 51, 61, 67, 87, 141,	572630 Z 572632 Z 572636 Z 572638 Z 572640 Z 572642 Z 572644 Z 572644 Z	234, 236 234, 236 234, 236 234, 236 201 201 201, 204	573162 Z 573164 Z 573166 Z 573168 Z 573170 Z 573172 Z 573176 Z 573178 Z	249 249 249 249 249 249 249
570750 570760 570765	z z z	228 202–205, 209, 211, 216–220, 223, 227–228, 232–234 200, 205, 210, 213, 216, 220, 222–223, 226–227 200–220, 222–228, 232–234, 236–237 201–202, 204–207, 209–210, 213–214, 216, 218, 220, 222–224,	571567 Z 571571 Z 571574 Z 571578 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285 61, 87, 109, 111, 133, 141, 149, 151, 191, 193, 195, 197, 244, 247, 255, 285 29, 51, 61, 67, 87, 141, 197	572630 Z 572632 Z 572636 Z 572638 Z 572640 Z 572642 Z 572644 Z 572646 Z 572648 Z	234, 236 234, 236 234, 236 234, 236 201 201 201, 204 201	573162 Z 573164 Z 573166 Z 573168 Z 573170 Z 573172 Z 573176 Z 573176 Z 573178 Z 573184 Z	249 249 249 249 249 249 249 249
570750 570760 570765 570770	z z z z	228 202-205, 209, 211, 216-220, 223, 227-228, 232-234 200, 205, 210, 213, 216, 220, 222-223, 226-227 200-220, 222-228, 232-234, 236-237 201-202, 204-207, 209-210, 213, 214, 216, 218, 220, 222-224, 226-227, 232-233	571567 Z 571571 Z 571574 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285 61, 87, 109, 111, 133, 141, 149, 151, 191, 193, 195, 197, 244, 247, 255, 285 29, 51, 61, 67, 87, 141, 197 61, 87, 109, 111, 133, 141,	572630 Z 572632 Z 572638 Z 572640 Z 572642 Z 572644 Z 572646 Z 572648 Z 572670 Z	234, 236 234, 236 234, 236 234, 236 201 201 201, 204 201 227	573162 Z 573164 Z 573166 Z 573170 Z 573172 Z 573176 Z 573178 Z 573178 Z 573184 Z 573186 Z	249 249 249 249 249 249 249 249 249
570750 570760 570765	z z z z	228 202–205, 209, 211, 216–220, 223, 227–228, 232–234 200, 205, 210, 213, 216, 220, 222–223, 226–227 200–220, 222–228, 232–234, 236–237 201–202, 204–207, 209–210, 213–214, 216, 218, 220, 222–224,	571567 Z 571571 Z 571574 Z 571578 Z	193, 195, 244, 247, 255, 285 109, 111, 133, 149, 151, 191, 193, 195, 244, 247, 255, 285 61, 87, 109, 111, 133, 141, 149, 151, 191, 193, 195, 197, 244, 247, 255, 285 29, 51, 61, 67, 87, 141, 197	572630 Z 572632 Z 572636 Z 572638 Z 572640 Z 572642 Z 572644 Z 572646 Z 572648 Z	234, 236 234, 236 234, 236 234, 236 201 201 201, 204 201	573162 Z 573164 Z 573166 Z 573168 Z 573170 Z 573172 Z 573176 Z 573176 Z 573178 Z 573184 Z	249 249 249 249 249 249 249 249

ArtNo. RG VE	-	ArtNo. RG VE	•	ArtNo. RG VE		ArtNo. RG VE	-
573325 Z	249	574754 Z	154, 177–178, 181, 200,	576015 E	195	578402 Z	169
573330 Z 573335 Z	249 249	574756 Z	210, 230, 235 154–155, 160–164,	576016 E	191 191	578404 Z	154–159, 161–162, 165–166, 168–169,
573360 Z	249	074700 2	166, 169–172, 176–178,	576017 E 576345 Z	191, 193, 195		171–172, 174–175,
573364 Z	249		181–182, 200–201,	577000 Z	187		179–180
573367 Z	249		207–208, 210–212, 214–215, 219, 221–224,	577010 E	187	578406 Z	154–159, 161–169,
573370 Z	249		228–231, 235–237	577013 E	187		171–172, 174–176, 178–180, 182–183
573400 Z 573402 Z	249 249	574758 Z	154-155, 160-164,	578001 Z	147	578408 Z	154, 156–159, 161,
573402 Z	249		166, 169–172, 176–178,	578002 Z	149		165–169, 171–172,
573406 Z	249		181–182, 200–201,	578003 Z	151	550/40 7	179–180, 182
573430 Z	244		207–208, 210–212, 214–215, 219, 221–224,	578010 E	149	578410 Z	155–169, 171–172, 174–176, 178–180, 183
573432 Z	244		228-231, 235-237	578012 E	147	578412 Z	154–159, 161–169,
573434 Z	244	574760 Z	154-155, 160-164,	578013 E 578014 E	147 149		171–172, 174–176,
573436 Z 573438 Z	244 244		166, 169–172, 176–178, 181–182, 200–201,	578014 E 578015 E	151	570/00 7	178–180, 182–183
573616 Z	249		207–208, 210–212,	578016 E	151	578420 Z 578426 Z	172 172
573624 Z	249		214-215, 219, 221-224,	578290 Z	147, 149, 151, 247, 255	578430 Z	172
573628 Z	249	574762 Z	228–231, 235–237	578295 Z	183-184	578432 Z	172
573630 Z 573632 Z	249 249	374762 Z	154-155, 160-164, 166, 169-172, 176-178,	578299 Z	147, 149, 151	578434 Z	175
573632 Z	249		181–182, 200–201,	578310 Z	154–155, 160, 162,	578436 Z	175
573636 Z	249		207–208, 210–212,		164–165, 168, 170, 177–178, 181	578438 Z	175
573638 Z	249		214–215, 219, 221–224, 228–231, 235–237	578312 Z	154–157, 159–170,	578440 Z	175 175
573640 Z	249	574764 Z	182		172–179, 181–182	578442 Z 578444 Z	165
573642 Z	249	574766 Z	182	578314 Z	154-157, 159-170,	578444 Z	165
573644 Z 573646 Z	249 249	574768 Z	182	E7021/ 7	172–179, 181–182	578448 Z	165
573647 Z	248	574770 Z	182	578316 Z	154–157, 159–170, 172–179, 181–182	578450 Z	165
573648 Z	248	574772 Z	164, 166–168, 213, 215–216, 218	578318 Z	154–157, 159–170,	578452 Z	165
573649 Z	248	574774 Z	215–216, 218 168, 218, 234		172–179, 181–182	578454 Z	175
573652 Z	249	574776 Z	164, 167–168, 183, 213,	578324 Z	154-155, 160-164,	578456 Z	156, 158–159, 161, 163–165, 167–169, 172,
574000 H 574300 H	185 245		216, 218, 237		170–171, 177–178, 181–182		174, 176, 180, 183
574300 H	245	574778 Z	154, 158, 161–162, 164,	578326 Z	154, 160, 162, 177–178	578458 Z	159, 161, 168, 172, 174
574352 Z	245		166–171, 174–175, 179, 183, 200, 209–210, 213,	578328 Z	154–155, 159–164,	578460 Z	156, 158–159, 161,
574430 Z	185		215–216, 218, 220, 222,		166, 169–172, 176–178,		163–165, 167–169, 172, 174, 176, 180, 183
574436 Z	82–83, 185		225–226, 228, 232–233	FR0000 7	181–182	578462 Z	156, 158–159, 161,
574437 Z 574516 Z	245 183, 238	574780 Z	161, 164, 168, 209, 213,	578330 Z 578332 Z	154, 160, 162, 177–178 154–155, 159–164,		163–165, 167–169, 172,
574700 Z	147, 149, 151, 183	574782 Z	218 154–159, 161–176,	370332 Z	166, 169–172, 176–178,	E70/// 7	174, 176, 180, 183
574702 Z	185, 238	374702 2	178–183, 200–206,		181–182	578464 Z	156, 159, 161, 163–165, 167–169, 172, 174, 176,
574704 Z	183, 238		208-228, 231-234,	578334 Z	154–155, 159–164,		183
574728 Z	156, 158–159, 161, 163–165, 167–169, 172,	574784 Z	236-237		166, 169–172, 176–178, 181–182	578466 Z	157–158, 168, 174–175
	174, 176, 180, 183, 202,	374764 Z	161–162, 164, 167–169, 174, 183, 209–210, 213,	578336 Z	154–155, 160–164,	578468 Z	155–158, 161, 163, 165, 167–169, 172, 174–176,
	205-206, 209, 211-212,		216, 218, 220, 225–226,		166, 169–172, 176–178,		180, 182
	214, 217–219, 223, 226, 228, 234, 237	55/50/ 7	237	FF0000 7	181–182	578470 Z	157–158, 161, 165, 168,
574730 Z	156, 158–159, 161,	574786 Z	155-159, 161-162, 164-166, 168-169,	578338 Z 578340 Z	154, 177–178, 181		172, 174–175
07.1700 2	163–165, 167–169, 172,		171–175, 179–180, 183,	578340 Z 578342 Z	154, 177–178, 181 164, 166–168, 173	578472 Z	155–158, 161, 163, 165, 167–169, 172, 174–176,
	174, 176, 180, 183, 202,		202, 204–206, 209–210,	578344 Z	158, 168, 181		180, 182
	205–206, 209, 211–212, 214, 217–219, 223, 226,		213–214, 216, 218, 220, 222–226, 228, 232–233,	578346 Z	164, 167–168, 183	578474 Z	155-158, 161, 163, 165,
	228, 234, 237		237	578348 Z	154, 158, 161-162,		167–169, 172, 174–176,
574732 Z	156, 158–159, 161,	574788 Z	154-159, 161-176,		164, 166–171, 174–175,	578476 Z	180 155–158, 161, 163, 165,
	163–165, 167–169, 172, 174, 176, 180, 183, 202,		178–183, 200–206,	578350 Z	178–180, 182–183 161, 164, 168, 173	370470 2	167–169, 172, 175–176,
	205-206, 209, 211-212,		208–228, 231–234, 236–237	578350 Z 578352 Z	154–159, 161–176,		180, 182
	214, 217–219, 223, 226,	574790 Z	168, 218	0,0002 2	178–183	578478 Z	161, 164, 167–168, 176
574734 Z	228, 234, 237 156, 159, 161, 163–165,	574792 Z	154, 156, 158, 161-162,	578354 Z	161–162, 164, 167–169,	578480 Z 578482 Z	181 159, 164, 174, 181–183
374734 Z	167–169, 172, 174, 176,		164–172, 178–180, 182,	FR00F/ 7	174, 178, 183	578484 Z	159, 164, 174, 181–183
	183, 202, 206, 209,		200–202, 206, 209–210, 213–216, 218–224,	578356 Z	155–159, 161–162, 164–169, 171–175,	578486 Z	181–182
	211–212, 214, 217–219, 223, 226, 228, 237		232-233, 236		178–180, 183	578488 Z	159, 164, 174, 182–183
574736 Z	154–155, 160, 162,	574794 Z	154-176, 178-183,	578358 Z	154-159, 161-176,	578490 Z	154–155, 157–158, 172,
_	164–165, 168, 170,		201–220, 222–228, 231–234, 236–237	E702/0 7	178–183	578492 Z	175, 179–180 154–155, 157–159,
	177–178, 181, 200–201,	574796 Z	168, 218	578360 Z	154, 156, 158–159, 161–162, 164–172, 175,	370472 Z	162–163, 166, 171–173,
	207–209, 212–213, 217, 220, 229–231, 234	574798 Z	154-159, 161-176,		178–180, 182		175, 179–180
574738 Z	154-157, 159-170,		178–183, 200–206,	578362 Z	154–176, 178–183	578494 Z	154–155, 157–159,
	172–179, 181–182,		208–228, 231–234, 236–237	578364 Z	154–159, 161–176,		162–163, 166, 171–173, 175, 179–180
	200–204, 206–221, 224–232, 234, 237	574800 Z	154, 160, 162, 200,	578368 Z	178–183 156, 158, 167–168,	578496 Z	154-155, 157-159,
574740 Z	154-157, 159-170,		207–208, 210	3,0000 2	179–180		162–163, 166, 171–173,
	172–179, 181–182,	574802 Z	154, 160, 162, 200,	578370 Z	166, 174, 183	578498 Z	175, 179–180 154, 157–159, 162–163,
	200–204, 206–221, 224–232, 234, 237	574804 Z	207–208 163, 173, 182, 211, 225	578372 Z	154, 158, 162, 164, 166,	5.5.76 2	166, 171–173, 179–180
574742 Z	154-157, 159-170,	574804 Z	163, 173, 182, 211, 225	578374 Z	170–172, 174–175 154–174, 178–183	578510 Z	177–178
	172–179, 181–182,	574808 Z	163, 173, 182, 211, 225	578374 Z	154–176, 178–183 154–162, 164–166,	578512 Z	177–178
	200–204, 206–221, 224–232, 234, 237	574850 Z	168, 217	2.0070 2	168, 170–172, 174–175,	578514 Z 578516 Z	166, 176–178 177–178
574744 Z	154–157, 159–170,	574852 Z	168, 217		179–180	578516 Z 578518 Z	166, 176–178
	172–179, 181–182,	574854 Z	168, 217	578378 Z	154–176, 178–183	578520 Z	166, 176–178
	200–204, 206–221, 224–232, 234, 237	574856 Z 575010 Z	182 255	578380 Z	154, 156–157, 159–175, 178–183	578522 Z	166, 176–178
574746 Z	154–157, 159–170,	575010 Z 575017 E	256	578382 Z	154–176, 178–183	578524 Z	170
	172–179, 181–182,	575020 E	255	578386 Z	154-155, 157-158,	578526 Z	170
	200–204, 206–221, 224–232, 234, 237	575021 E	255		161–163, 165–172,	578528 Z 578530 Z	170 170
574748 Z	154–155, 160–164,	575022 E	255	E70200 7	174–176, 178–182	578530 Z 578534 Z	156, 182–183
J 40 E	170–171, 177–178,	575100 Z	256	578390 Z	154–157, 159–170, 172–179, 181–182	578536 Z	156, 182–183
	181–182, 200–201,	575252 Z	255 255	578392 Z	155–158, 161, 163,	578538 Z	156, 182–183
	207–208, 210, 212, 221, 229–231, 235–236	575253 Z 575256 Z	255 255		166-170, 172, 175-176,	578540 Z	156, 182–183
574750 Z	154, 177-178, 181, 200,	575278 Z	256	E7020/ 7	179–181	578550 Z	181
	230, 235	576000 Z	193	578394 Z 578396 Z	171 154, 157–158, 164, 180	578552 Z 578554 Z	154, 181–182 154, 181–182
574752 Z	154–155, 160–164, 166, 169–172, 176–178,	576003 Z	195	578398 Z	157–158, 162, 166, 169,	578556 Z	181–182
	181–182, 200–201,	576006 Z	191	· · · · · · -	171, 174–175, 179–180	578566 Z	158, 161, 166, 169–172,
	207-208, 210-212,	576010 E	193 193	578400 Z	154–159, 161–169,		182
	214–215, 219, 221–224, 228–231, 235–237	576011 E 576014 E	195		171–172, 174–176, 178–180, 182–183	578568 Z	158, 161, 166, 169–172, 182
	220 201, 200 201	0.0017 L			0 100, 102 103		. 32

ArtNo. RG VE	-	ArtNo. RG		ArtNo. RG V	-	ArtNo. RG V	•
578570 Z	158, 161, 166, 169–172,	580010 E	137	590056 Z	135	751568 S	44
578572 Z	182 174	580014 E	141	590057 Z	135	751569 S	44
578576 Z	180	580020 E	137 137	590058 Z	135 135	751570 S	44 44
578578 Z	180, 182	580021 E 580022 E	137	590059 Z 590060 Z	135	751571 S 753240 Z	43
578582 Z	180, 182	580022 E	137	590061 Z	135	759250 S	44
578584 Z	180, 182	580024 E	137	590062 Z	135	759251 S	44
578586 Z	180, 182	580025 E	137	590111 Z	135	759252 S	44
578588 Z	168, 173	580026 E	137	590150 Z	135	759253 S	44
578590 Z	168, 173	580027 E	137	590153 Z	135	759254 S	44
578592 Z	163, 168, 173, 180	580028 E	137	590160 Z	135, 139	759255 S	44
578594 Z	163, 168, 173, 180	580029 E	137	731200 Z	31	759256 S	44
578596 Z	163, 168, 173, 180	580030 E	137	731205 Z	31	759257 S	44
578598 Z	163, 168, 173, 180	580031 E	137	731210 Z	31	759258 S	44
578600 Z	163, 168, 173, 180	580033 E	137	731220 Z	31	759259 S	44
578602 Z	180	580034 E	137	731230 Z	31	759260 S	44
578604 Z	154-155, 160-164,	580035 E	137	731240 Z	31	759261 S	44
	166, 169–172, 176–178, 181–182	580036 E	137	731250 Z	31	759262 S	44
578606 Z	158, 161, 166, 169–172,	580037 E 580038 E	137 137	731301 Z 731302 Z	31 31	759263 S 759264 S	44 44
	182	580036 E	137	731302 Z 731303 Z	31	759265 S	44
578608 Z	154	580040 E	137	731303 Z	31	759270 S	44
578610 Z	154	580051 E	141	731304 Z	31	759271 S	44
578612 Z	154, 158	580051 E	141	731303 Z	31	759272 S	44
578614 Z	154	580053 E	141	731307 Z	31	759273 S	44
578618 Z	179	580054 E	141	731307 Z	31	759274 S	44
578620 Z	184	580055 E	141	731309 Z	31	759275 S	44
578621 Z	184	580056 E	141	731310 Z	31	759276 S	44
578622 Z	184	580057 E	141	731311 Z	31	759277 S	44
578624 Z	154–158, 161–162, 164–176, 178–183	580058 E	141	731312 Z	31	759278 S	44
578630 Z	162–163, 170, 173, 182	580059 E	141	731320 Z	31	759279 S	44
578630 Z	162–163, 170, 173, 182	580060 E	141	731321 Z	31	759280 S	44
578632 Z 578634 Z	162–163, 170, 173, 182	580061 E	141	731322 Z	31	759281 S	44
578636 Z	163, 170, 173, 182	580062 E	141	731323 Z	31	759282 S	44
578638 Z	157–159, 163	580063 E	141	731324 Z	31	759330 S	44
578640 Z	172, 182	580064 E	141	731325 Z	31	759360 S	44
578642 Z	172, 182	580065 E	141	731326 Z	31	759361 S	44
578644 Z	172, 182	580066 E	141	731700 Z	24–27, 29, 97	759362 S	44
578646 Z	172, 182	580067 E	141	750003 U	43	759363 S	44
578652 Z	175	580068 E	141	750004 U 751000 Z	43	759364 S	44 44
578654 Z	175	580069 E 580100 Z	141 139	751000 Z 751040 Z	43 43	759365 S 759366 S	44
578656 Z	175	580100 Z	139	751040 Z	43	759367 S	44
578659 Z	183	581070 Z	143	751060 Z	43	759368 S	44
578660 Z	172, 181	581080 Z	143	751000 Z	43	759370 S	44
578664 Z	172, 176, 181	581110 Z	143	751070 Z	43	759371 S	44
578666 Z	172, 176, 181	581130 Z	143	751090 Z	43	759372 S	44
578670 Z	164	581150 Z	143	751096 Z	43	759373 S	44
578700 Z	159	581180 Z	143	751097 Z	43	759374 S	44
578702 Z	159	581200 Z	143	751098 Z	43	759375 S	44
578704 Z	159	581210 Z	143	751100 Z	43	759376 S	44
578706 Z	159	581220 Z	143	751102 Z	43	759377 S	44
578708 Z	159	581230 Z	143	751501 S	44	759378 S	44
578710 Z 578712 Z	159 159	581240 Z	143	751502 S	44	759379 S	44
578712 Z 578714 Z	159	581260 Z	143	751503 S	44	759380 S	44
578716 Z	168	581270 Z	143	751504 S	44	759381 S	44
578718 Z	168	581280 Z	143	751505 S	44	759382 S	44
578720 Z	168	581310 Z	143	751506 S	44	759383 S	44
578740 Z	173, 183	581320 Z	143	751507 S	44	759384 S	44
578742 Z	173, 183	581330 Z 581350 Z	143 143	751508 S	44 44	844010 E 844011 E	82 83
578744 Z	173, 183	581360 Z	143	751509 S 751510 S	44	844045 Z	82–83
578746 Z	173, 183	581370 Z	143	751510 S	44	844050 Z	82-83
579000 Z	188	581380 Z	143	751511 S	44	844051 Z	82-83
579001 Z	197	581390 Z	143	751516 S	44	844510 Z	83
579010 E	188	581400 Z	143	751518 S	44	845001 M	85
579012 E	188	581410 Z	143	751519 S	44	845002 M	87
579014 E	197	581420 Z	143	751520 S	44	845003 M	85
579100 Z	200, 207, 228, 230	581430 Z	143	751521 S	44	845004 M	89
579101 Z	200–204, 207–213, 215–221, 224–232,	581440 Z	143	751522 S	44	845050 Z	85, 87, 89
	215–221, 224–232, 234, 237	581450 Z	143	751523 S	44	845051 Z	85, 87, 89
579104 Z	210	581460 Z	143	751524 S	44	845052 Z	85, 87, 89
579105 Z	210	581470 Z	143	751525 S	44	845053 Z	85, 87, 89
579106 Z	210	581480 Z	143	751526 S	44	845054 Z	85
579107 Z	212–213, 230–231	581490 Z	143	751527 S	44	845055 Z	85, 87, 89
579108 Z	200, 207, 220, 230–231	581500 Z	143	751528 S	44	845057 Z	89
579109 Z	200	581510 Z	143	751544 S	44	845060 Z	89
579110 Z	200-204, 207-213,	581520 Z	143	751545 S	44	845085 Z	85
	215-221, 224-232,	581530 Z	143	751546 S	44	845110 Z	85, 87
E70144 7	234, 237	581540 Z 582036 Z	143 137, 139, 141–142	751547 S 751548 S	44 44	845118 Z 845131 Z	85, 87 85
579111 Z	200–204, 207–213, 215–221, 224–232,	582036 Z 582110 Z	137, 139, 141–142	751548 S 751549 S	44	845218 Z	85, 87
	215–221, 224–232, 234, 237	582110 Z	139	751549 S 751550 S	44	845218 Z 845220 Z	85, 87, 89
579112 Z	235	586000 Z	137	751550 S	44	845230 Z	89
577112 Z 579113 Z	235	586012 Z	139	751551 S	44	845530 Z	85, 87
579114 Z	235	586100 Z	137, 141	751552 S	44	849006 M	70
579120 Z	188, 238	586150 Z	137, 141	751557 S	44	849007 M	71
579123 Z	197, 238	590000 Z	135	751559 S	44	849310 Z	49, 51, 70–71, 85, 87
579144 Z	207	590020 E	135	751560 S	44	849315 Z	49, 51, 70–71, 85, 87
J//144 L				751561 S	44	849700 Z	71
579146 Z	207	590021 E	135				
	207 188	590021 E 590022 E	135	751562 S	44	849703 Z	70-71
579146 Z						849703 Z 849706 Z	70–71 70–71
579146 Z 579240 Z	188	590022 E 590051 Z 590052 Z	135	751562 S 751563 S 751564 S	44		
579146 Z 579240 Z 579600 Z 579601 Z 579603 Z	188 119, 123 188, 197 238	590022 E 590051 Z 590052 Z 590053 Z	135 135 135 135	751562 S 751563 S 751564 S 751565 S	44 44 44 44		
579146 Z 579240 Z 579600 Z 579601 Z	188 119, 123 188, 197	590022 E 590051 Z 590052 Z	135 135 135	751562 S 751563 S 751564 S	44 44 44		

Notes	

Notes



www.rems.de

Head Office



Germany: REMS GmbH & Co KG Postfach 1631 · 71306 Waiblingen · Germany Stuttgarter Straße 83 · 71332 Waiblingen · Germany Tel +49 7151 17 07-0 info@rems.de

Branch Offices



Denmark: REMS Scandinavia A/S Snedkervej 1 · 4600 Køge · Denmark Tel +45 56 63 14 00 DNK@rems.de



France: REMS SARL

2, Rue du Stade \cdot 67250 Hoffen \cdot France Tel +33 388 80 44 53 FRA@rems.de



Great Britain: REMS (U.K.) LIMITED Unit 5 · Ash Industrial Estate Flex Meadow \cdot Harlow \cdot Essex CM19 5TJ \cdot U.K. Tel +44 1279 413698 GBR@rems.de



Italy: REMS S.R.L.

Via Sirtori, 13/D · 20017 Passirana di Rho (Milano) · Italy Tel +39 02 9 30 21 11 ITA@rems.de



Poland: REMS POLSKA Sp. z o.o.

Dąbrowa · Ulica Piaskowa 19 · 62-070 Dopiewo · Poland Tel +48 61 654 09 00 POL@rems.de



Spain: REMS ESPAÑA, S.A.U. Pol. Ind. San José de Valderas Calle Herramientas, 28 \cdot 28918 Leganés (Madrid) \cdot Spain Tel +34 916 444 833 ESP@rems.de



Czech Republic: REMS Česká republika s.r.o. Nádražní 271 · 253 01 Hostivice · Czech Republic Tel +420 2 20 98 28 80 CZE@rems.de

Prodaja preko pooblaščenih trgovin.

Obvestilo trgovcem in izvajanje demonstracij preko zastopnika firme REMS:

Čubra Marketing

Mob.Tel.: 041/787 552 E-mail: Orien.Cubra@rems.de SVN@rems.de · www.rems.de

